



SNAP-IN TYPE ALUMINUM ELECTROLYTIC CAPACITORS

CAT. No. E1001F

INDEX		
PRODUCT SEARCH	SERIES TABLE	➔
	GROUP CHART	➔
PRODUCTION GUIDE	PRECAUTIONS AND GUIDELINES (Aluminum Electrolytic Capacitor)	➔
	PART NUMBERING SYSTEM	➔
	ENVIRONMENTAL CONSIDERATION	➔
	PACKAGING	➔
	AVAILABLE TERMINALS FOR SNAP-IN TYPE	➔
	STANDARDIZATION	➔
	WORLD-WIDE MANUFACTURING LOCATIONS	➔
PRODUCT SPECIFICATIONS	SNAP-IN TYPE	➔
RELIABILITY DATA		➔
APPENDIX (GLOBAL CODE)		➔

Series	Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (V _{dc})	Capacitance range (μF)		
Conductive Polymer Electrolyte Type	PXE <small>(NEW)</small>	Vertical type, super low ESR, high ripple current	105°C 2,000 hours		●	●	SMD	2.5 to 16	33 to 1,200	
	PXC	Vertical type, super low ESR	105°C 1,000 hours		●	●	SMD	2.5 to 16	27 to 470	
	PXA <small>(Upgrade!)</small>	Vertical type, super low ESR	105°C 2,000 hours		●	●	SMD	2.5 to 25	3.3 to 1,500	
	PXH	125°C Vertical type	125°C 1,000 hours		●	●	SMD	2.5 to 20	22 to 1,000	
	PSC <small>(NEW)</small>	Radial lead type, super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	330 to 2,700	
	PSA	Super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	100 to 1,000	
	PS	Super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 25	68 to 1,500	
Surface Mount	Vertical Type	MVS	4.5mm height	85°C 2,000 hours	●	●	SMD	4 to 50	0.1 to 220	
		MVA	5.5 to 22.0mm max. height, downsized	85°C 2,000 hours			▲	SMD	4 to 450	0.1 to 10,000
		MV	5.5 to 10.5mm max. height	85°C 1,000 to 2,000 hours	●	●	●	SMD	4 to 63	0.1 to 1,000
		MVE	5.5 to 22.0mm max. height, downsized	105°C 1,000 to 2,000 hours			▲	SMD	6.3 to 450	0.47 to 6,800
		MVK	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MKA	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MZA <small>(Upgrade!)</small>	6.1 to 10.5mm max. height, very low impedance	105°C 2,000 hours		●	●	SMD	6.3 to 80	3.3 to 1,500
		MVY	5.5 to 22.0mm max. height	105°C 1,000 to 5,000 hours		●	▲	SMD	6.3 to 100	1.0 to 8,200
		MZD <small>(NEW)</small>	105°C 5,000 hours, low impedance, long life <small>(Ask Engineering Bulletin No758 in detail)</small>	105°C 5,000 hours		●	●	SMD	6.3 to 50	10 to 470
		MLA <small>(NEW)</small>	Low impedance, long life	105°C 3,000 hours		●	●	SMD	6.3 to 50	10 to 1,000
		MVJ	6.0mm max. height <small>(Ask Engineering Bulletin No653 in detail)</small>	105°C 2,000 hours			●	SMD	6.3 to 50	0.1 to 100
		MLD <small>(NEW)</small>	105°C 5,000 hours, long life <small>(Ask Engineering Bulletin No759 in detail)</small>	105°C 5,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MVL	6.0 to 10.5mm max. height	105°C 3,000 to 5,000 hours			●	SMD	6.3 to 50	0.1 to 1,000
		MVH <small>(Upgrade!)</small>	6.0 to 22.0mm max. height	125°C 1,000 to 5,000 hours			▲	SMD	10 to 450	3.3 to 4,700
		MV-BP	5.5mm max. height, bi-polar	85°C 2,000 hours			●	SMD	4 to 50	0.1 to 47
MVK-BP	6.0mm max. height, bi-polar	105°C 1,000 hours			●	SMD	6.3 to 50	0.1 to 47		
Miniature	Low Profile	SRM	5mm height, downsized	85°C 1,000 hours		●	Radial	4 to 50	0.1 to 330	
		SRE	5mm height	85°C 1,000 hours	●		Radial	4 to 50	0.1 to 100	
		KRE	5mm height	105°C 1,000 hours	●	●	Radial	6.3 to 50	0.1 to 100	
		SRA	7mm height	85°C 1,000 hours	●		Radial	4 to 63	0.1 to 470	
		KMA	7mm height	105°C 1,000 hours	●	●	Radial	4 to 63	0.1 to 220	
		SRG	φ4×7 to φ18×25mm, low profile	85°C 1,000 to 2,000 hours			●	Radial	4 to 50	0.1 to 10,000
		KRG	φ4×7 to φ18×25mm, low profile	105°C 1,000 hours			●	Radial	6.3 to 50	0.1 to 10,000
	General Purpose	SMQ	Downsized	85°C 2,000 hours	●			Radial	6.3 to 450	0.1 to 47,000
		KMQ	Downsized	105°C 1,000 to 2,000 hours +R	●	▲		Radial	6.3 to 450	0.1 to 47,000
		SMG	General, downsized	85°C 2,000 hours	●	▲		Radial	6.3 to 450	0.1 to 39,000
		KMG	General, downsized	105°C 1,000 to 2,000 hours +R	●	▲		Radial	6.3 to 450	0.1 to 22,000
		SME	General <small>(Ask Engineering Bulletin No511 in detail)</small>	85°C 2,000 hours			▲	Radial	6.3 to 450	0.1 to 15,000
		KME	General <small>(Ask Engineering Bulletin No512 in detail)</small>	105°C 1,000 hours +R			▲	Radial	6.3 to 400	0.1 to 15,000
		SME-BP	Bi-polar, general	85°C 2,000 hours	●	●		Radial	6.3 to 100	0.47 to 6,800
		KME-BP	Bi-polar, general	105°C 1,000 hours	●	●		Radial	6.3 to 100	0.47 to 6,800
High Frequency Use	KZM <small>(NEW)</small>	Lowest impedance, long life	105°C 6,000 to 10,000 hours +R	●			Radial	6.3 to 35	27 to 10,000	
	KZH	Lowest impedance, long life	105°C 5,000 to 6,000 hours +R	●			Radial	6.3 to 35	47 to 8,200	
	KZE	Lowest impedance, long life	105°C 1,000 to 5,000 hours +R	●			Radial	6.3 to 100	6.8 to 6,800	
	KY <small>(Upgrade!)</small>	Low impedance, long life	105°C 4,000 to 10,000 hours +R		●		Radial	6.3 to 100	0.47 to 18,000	
	LXZ	Low impedance, downsized	105°C 2,000 to 8,000 hours +R	●	●		Radial	6.3 to 63	12 to 18,000	
	LXY	Low impedance, high reliability	105°C 2,000 to 8,000 hours +R	●	●	●	Radial	10 to 63	10 to 8,200	
	LXV	Low impedance	105°C 2,000 to 5,000 hours +R		●	●	Radial	6.3 to 100	5.6 to 15,000	
	KMF	Low impedance, high CV, general <small>(Ask Engineering Bulletin No630 in detail)</small>	105°C 2,000 hours +R		●		Radial	160 to 450	2.2 to 220	

■ : Promotional products

▲ : Some of range are solvent-proof.


Series		Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (V _{dc})	Capacitance range (μF)	
Miniature	High Reliability	KXJ <small>(NEW)</small>	Downsized, long life, for input filtering	105°C 10,000 to 12,000 hours +R	●		Radial	160 to 400	10 to 680	
		KXG	Downsized, long life, for input filtering	105°C 8,000 to 10,000 hours +R	●		Radial	160 to 450	6.8 to 330	
		KMX	Long life, for input filtering <small>(Ask Engineering Bulletin No 646 in detail)</small>	105°C 8,000 to 10,000 hours +R	●		Radial	160 to 450	3.3 to 680	
		SMH	φ20×20 to φ22×50mm	85°C 2,000 hours +R	●		Radial	160 to 450	33 to 470	
		KMH	φ20×20 to φ22×50mm	105°C 2,000 hours +R	●		Radial	160 to 450	33 to 470	
		PAG	Low profile, for input filtering	105°C 2,000 hours +R			Radial	200 to 450	18 to 560	
		KLJ <small>(NEW)</small>	Downsized, no sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	4.7 to 330	
		KLG	No sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	22 to 330	
		FL	Long life	105°C 3,000 hours +R		●	Radial	6.3 to 50	0.47 to 270	
		GPA <small>(NEW)</small>	125°C, downsized, low impedance	125°C 3,000 to 5,000 hours +R	●	●	Radial	25 to 63	330 to 6,800	
		GXE	125°C, downsize, low impedance	125°C 2,000 to 5,000 hours +R	●	▲	Radial	10 to 450	4.7 to 4,700	
		GXL	125°C Long life	125°C 5,000/10,000 hours +R		●	Radial	10 to 50	100 to 4,700	
		GHA <small>(NEW)</small>	150°C (Ask Engineering Bulletin No715 in detail)	150°C 1,000 hours		●	Radial	10 to 100	10 to 10,000	
	Special Application	LBG <small>(Upgrade!)</small>	For airbag	105°C 5,000 hours +R	●	●	Radial	25 to 35	1,000 to 11,000	
		KZV <small>(NEW)</small>	For PC motherboard <small>(Ask Engineering Bulletin No756 in detail)</small>	105°C 2,000 hours +R	●		Radial	4	820 to 2,700	
		KZJ <small>(NEW)</small>	For PC motherboard	105°C 2,000 hours +R	●		Radial	6.3 to 16	470 to 3,300	
		KZG	For PC motherboard	105°C 2,000 hours +R	●		Radial	6.3 to 16	470 to 3,300	
		LLA	Low DC leakage, general	85°C 1,000 hours		●	Radial	6.3 to 50	0.1 to 15,000	
		PH	For photo flash	55°C 5,000 times charging			Radial	300 & 330	—	
	Large Sized	General Purpose	KMR <small>(NEW)</small>	105°C, Snap-in terminal, super downsized	105°C 2,000 hours +R	●		Pin	160 to 450	100 to 3,900
			SMQ	Snap-in terminal, more downsized	85°C 2,000 hours +R	●		Pin	160 to 450	82 to 3,900
KMQ <small>(Upgrade!)</small>			Snap-in terminal, more downsized	105°C 2,000 hours +R	●		Pin	160 to 450	68 to 3,300	
SMM			Snap-in terminal, downsized	85°C 3,000 hours +R	●		Pin	35, 50, 160 to 450	47 to 33,000	
KMM			Snap-in terminal, downsized	105°C 2,000 to 3,000 hours +R	●		Pin	160 to 450	39 to 3,300	
SMH			Snap-in terminal, general <small>(Refer Engineering Bulletin No585 for 160 to 450V)</small>	85°C 2,000 hours +R	●		Pin	6.3 to 100	820 to 100,000	
KMH			Snap-in terminal, general <small>(Refer Engineering Bulletin No584 for 160 to 450V)</small>	105°C 2,000 hours +R	●		Pin	6.3 to 100	560 to 82,000	
Low Profile		SLM	15mm height	85°C 2,000 hours +R			Pin	160 to 400	47 to 560	
		KLM	15mm height	105°C 2,000 hours +R			Pin	160 to 400	39 to 390	
High Reliability		LXM	Long life	105°C 7,000 hours +R			Pin	160 to 450	47 to 2,200	
		LXQ	Long life, downsized	105°C 5,000 hours +R			Pin	160 to 450	82 to 2,700	
		LXG	Long life	105°C 5,000 hours +R			Pin	10 to 100	390 to 47,000	
		CHA	No sparks with DC overvoltage, downsized	105°C 2,000 hours +R			Pin	200 & 400	56 to 1,200	
		LXH	No sparks with DC overvoltage	105°C 3,000/5,000 hours +R			Pin	200 & 400	68 to 1,500	
		RWE-LR	For air-conditioning <small>(Ask Engineering Bulletin No768 in detail)</small>	85°C 3,000 hours +R			Lug	250 to 450	330 to 2,200	
Screw-mount Terminal Type		General Purpose	SME	Screw terminal, general	85°C 2,000 hours +R	●		Screw	10 to 250	560 to 680,000
			KMH	Screw terminal, general	105°C 2,000 hours +R	●		Screw	10 to 400	180 to 680,000
		For Inverter	RWG <small>(NEW)</small>	85°C, high ripple, downsized, long life	85°C 5,000 hours +R			Screw	350 to 450	1,500 to 18,000
	RWF		High ripple, long life	85°C 5,000 hours +R			Screw	350 to 450	820 to 22,000	
	RWE		High ripple	85°C 2,000 hours +R	●		Screw	350 to 550	100 to 12,000	
	RWY		High ripple, long life, low cost	85°C 5,000 hours +R			Screw	350 to 450	500 to 14,000	
	RWL		High ripple, long life	85°C 20,000 hours +R			Screw	350 to 450	2,200 to 12,000	
	FTP		Ellips can shape, high ripple	85°C 5,000 hours +R			Screw	63 to 450	270 to 21,000	
	LXA		Long life	105°C 2,000/5,000 hours +R			Screw	10 to 525	330 to 390,000	
	LXR		High ripple, long life	105°C 5,000 hours +R			Screw	350 to 450	2,200 to 15,000	
	LWY		Low cost (Ask Engineering Bulletin No714 in detail)	105°C 5,000 hours +R			Screw	350 to 450	460 to 13,000	
KW	Low impedance (Ask Engineering Bulletin in detail)	105°C 2,000 hours		●	Screw	10 to 100	1,000 to 100,000			

■ : Promotional products


▲ : Some of range are solvent-proof.

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

◆SURFACE MOUNT

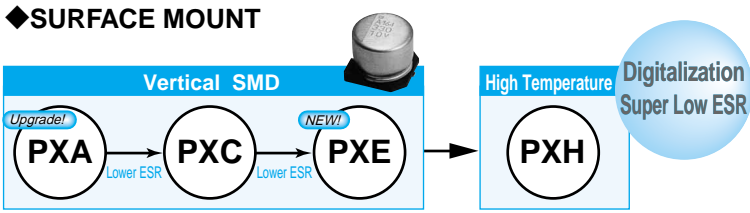


◆RADIAL LEAD

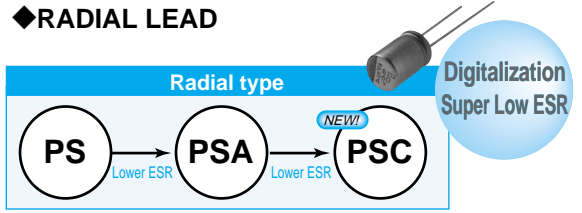


ALUMINUM ELECTROLYTIC CAPACITORS

◆SURFACE MOUNT

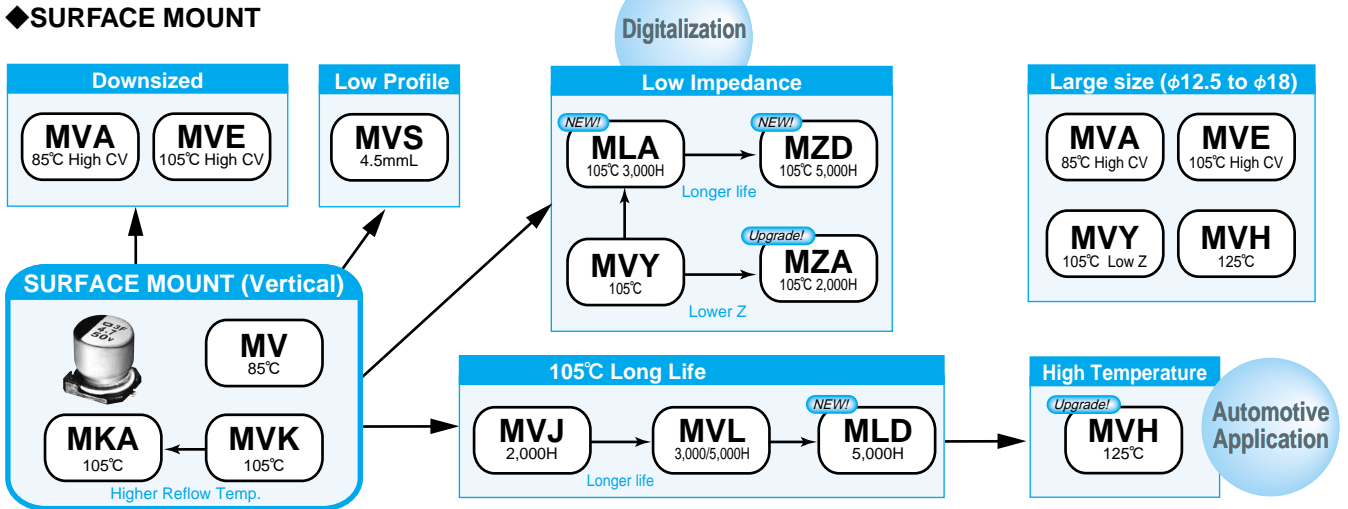


◆RADIAL LEAD

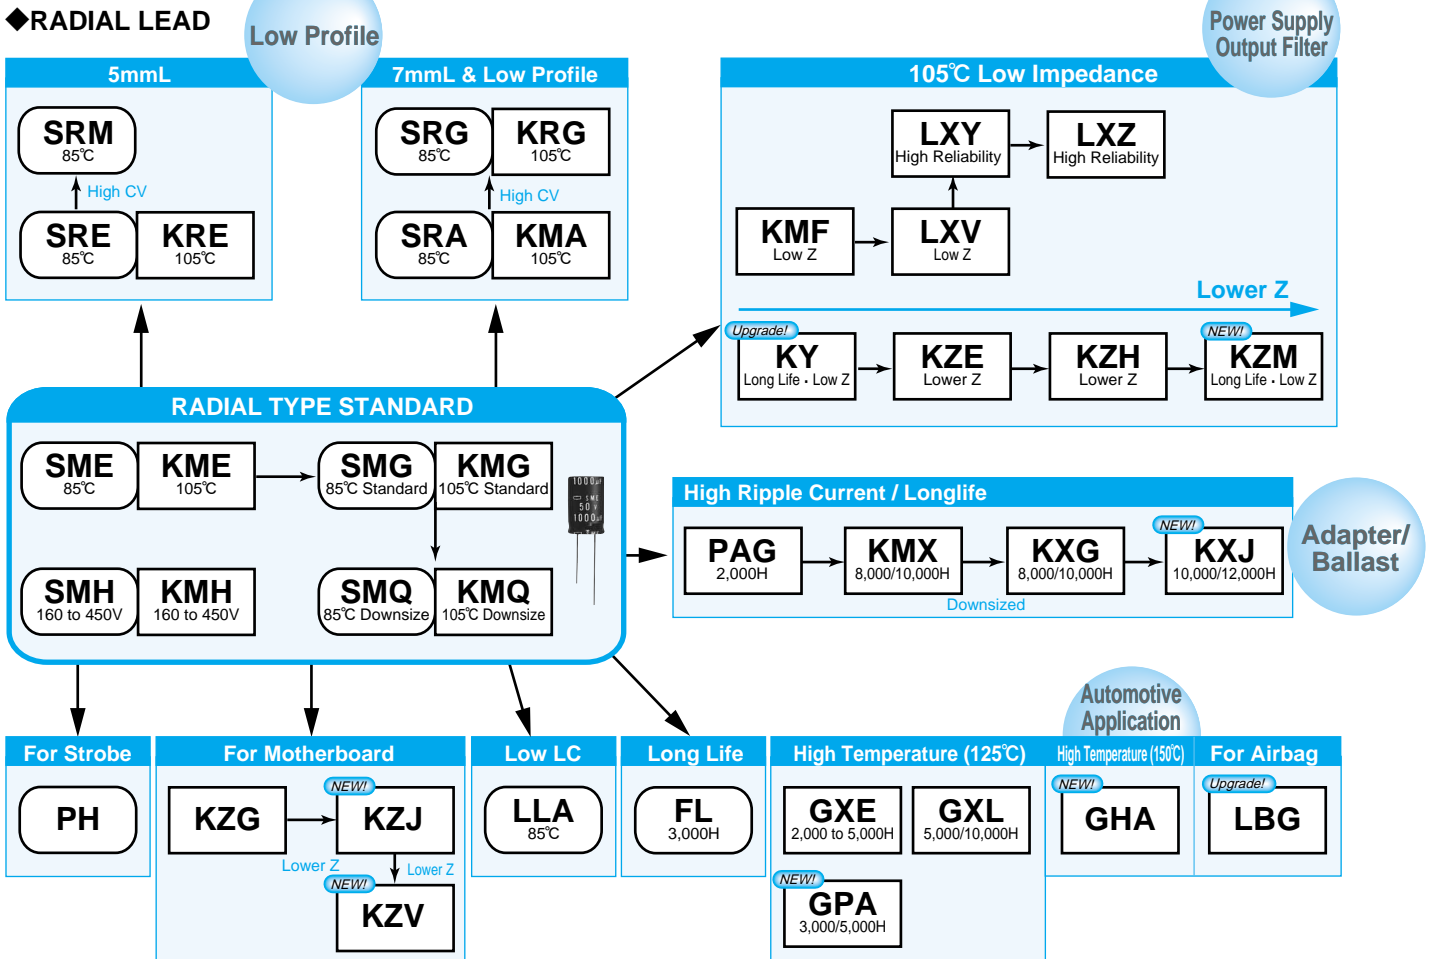


ALUMINUM ELECTROLYTIC CAPACITORS

◆SNAP-IN

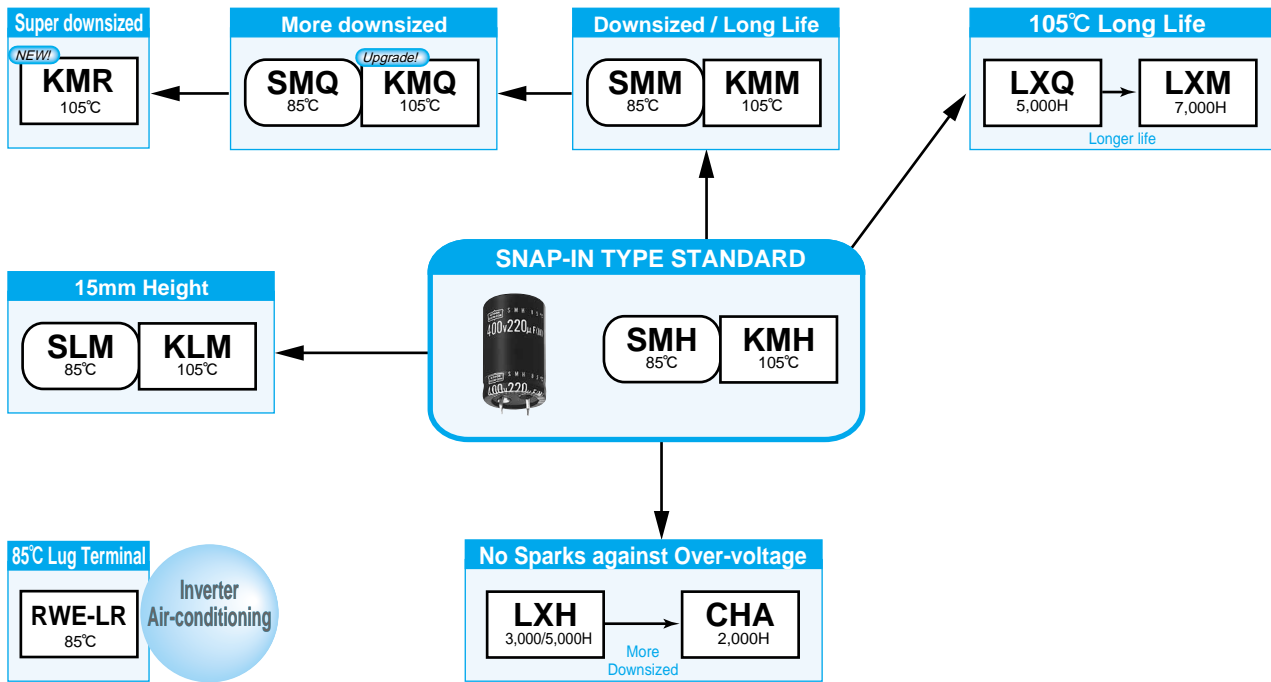

◆SCREW-MOUNT TERMINAL

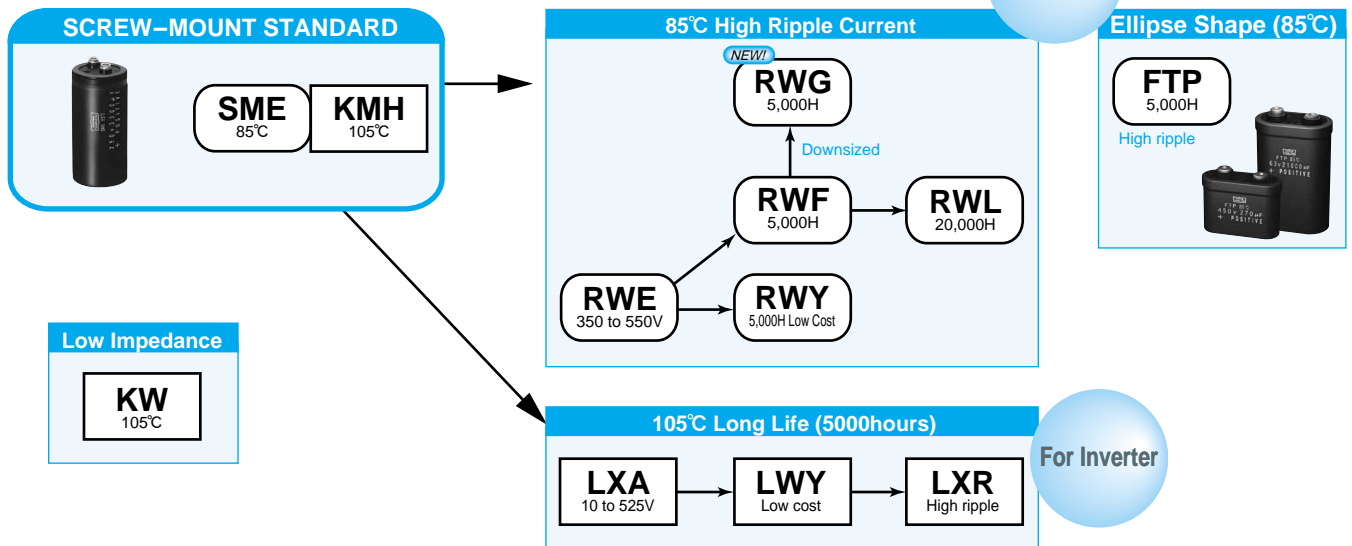




PART NUMBERING SYSTEM

A guide to global code (Snap-in type)

(Example : KMM series, 400V-220 μ F, ϕ 30 \times 30L)

Refer to the following table about global code for snap-in type

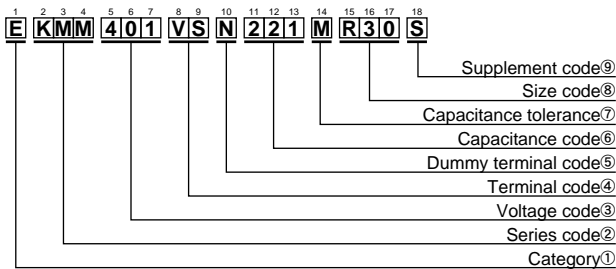

①Category

Type	Code
Polar	E

②Series code

Series name	Code		
	2nd	3rd	4th
KMM	K	M	M
No series name	C	S	T

③Voltage code

Voltage (V)	Code		
	5th	6th	7th
6.3	6	R	3
10	1	0	0
16	1	6	0
25	2	5	0
35	3	5	0
50	5	0	0
63	6	3	0
80	8	0	0
100	1	0	1
160	1	6	1
180	1	8	1
200	2	0	1
220	2	2	1
250	2	5	1
315	3	B	1
350	3	5	1
400	4	0	1
420	4	2	1
450	4	5	1
500	5	0	1

④Terminal code

Type	Code	
	8th	9th
VS	V	S
LI	L	I
LR	L	R
LC	L	C
LA	L	A
VR	V	R

⑤Dummy terminal code

Terminal #	Code
	10th
0	N
1	S
2	D
3	T

⑥Capacitance code

Cap. (μ F)	Code		
	11th	12th	13th
10	1	0	0
22	2	2	0
33	3	3	0
47	4	7	0
68	6	8	0
100	1	0	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
1,000	1	0	2
2,200	2	2	2
3,300	3	3	2
4,700	4	7	2
6,800	6	8	2
10,000	1	0	3
22,000	2	2	3
33,000	3	3	3
47,000	4	7	3
68,000	6	8	3
100,000	1	0	4
220,000	2	2	4
330,000	3	3	4
470,000	4	7	4
680,000	6	8	4

⑦Capacitance tolerance

Tol. (%)	Code
\pm 20	M

⑧Size code

ϕ D	Code
	15th
20	N
22	P
25.4	Q
30	R
35	A
Others	S

L	Code	
	16th	17th
15	1	5
20	2	0
25	2	5
30	3	0
35	3	5
40	4	0
45	4	5
50	5	0
55	5	5
60	6	0

⑨Supplement code


Sleeve material	Terminal plating material	Code
		18th
PET	Sn100%	S
	Sn-Pb	C
PVC	Sn100%	B
	Sn-Pb	N

* Refer to the appendix (Global code) for codes does not listed.

New!

KMR Series

- Downsized 5mm in height from current snap-ins KMQ series
- Max. 50% up ripple current than same case size of KMQ series
- Endurance with ripple current : 2,000 hours at 105°C
- Rated voltage range : 160 to 450V, Capacitance range : 100 to 3,900μF
- For inverter control, switching power supply
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS


Items	Characteristics			
Category	-25 to +105°C			
Temperature Range				
Rated Voltage Range	160 to 450V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	$I \leq 3\sqrt{CV}$ Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.			
	Capacitance change	≤±20% of the initial value		
	D.F. (tanδ)	≤200% of the initial specified value		
	Leakage current	≤The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.			
	Capacitance change	≤±15% of the initial value		
	D.F. (tanδ)	≤150% of the initial specified value		
	Leakage current	≤The initial specified value		

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

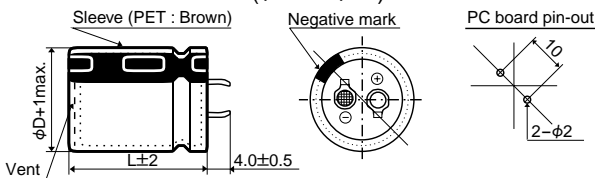


● Terminal Code : LI (φ35)

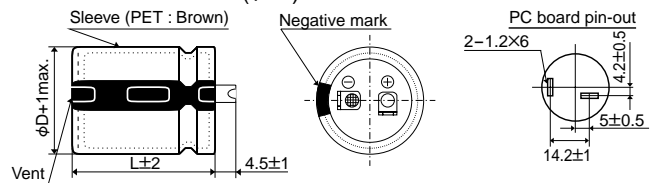

No plastic disk is the standard design.

◆ PART NUMBERING SYSTEM

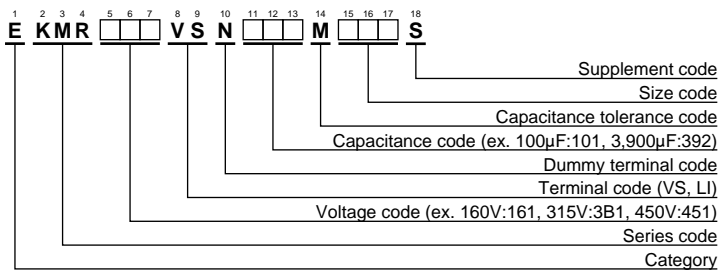

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.
160	560	22×25	1.58	EKMR161VSN561MP25S	200	1,800	35×35	2.53	EKMR201VSN182MA35S
	680	22×30	1.83	EKMR161VSN681MP30S		2,200	30×50	3.31	EKMR201VSN222MR50S
	820	22×35	2.06	EKMR161VSN821MP35S		2,200	35×40	2.92	EKMR201VSN222MA40S
	820	25.4×25	1.89	EKMR161VSN821MQ25S		2,700	35×45	3.33	EKMR201VSN272MA45S
	1,000	22×40	2.33	EKMR161VSN102MP40S		2,700	35×50	3.43	EKMR201VSN272MA50S
	1,000	25.4×30	2.15	EKMR161VSN102MQ30S		250	330	22×25	1.21
	1,000	30×25	1.90	EKMR161VSN102MR25S	390		22×30	1.38	EKMR251VSN391MP30S
	1,200	22×45	2.61	EKMR161VSN122MP45S	470		22×35	1.56	EKMR251VSN471MP35S
	1,200	22×50	2.69	EKMR161VSN122MP50S	470		25.4×25	1.43	EKMR251VSN471MQ25S
	1,200	25.4×35	2.45	EKMR161VSN122MQ35S	560		22×40	1.74	EKMR251VSN561MP40S
	1,500	25.4×40	2.82	EKMR161VSN152MQ40S	560		25.4×30	1.61	EKMR251VSN561MP30S
	1,500	25.4×45	2.88	EKMR161VSN152MQ45S	560		30×25	1.42	EKMR251VSN561MR25S
	1,500	30×30	2.39	EKMR161VSN152MR30S	680		22×45	1.97	EKMR251VSN681MP45S
	1,500	35×25	2.17	EKMR161VSN152MA25S	680		25.4×35	1.85	EKMR251VSN681MQ35S
	1,800	25.4×50	3.22	EKMR161VSN182MQ50S	820		22×50	2.22	EKMR251VSN821MA25S
	1,800	30×35	2.73	EKMR161VSN182MR35S	820		25.4×40	2.08	EKMR251VSN821MQ40S
	1,800	30×40	2.82	EKMR161VSN182MR40S	820		25.4×45	2.13	EKMR251VSN821MQ45S
	1,800	35×30	2.47	EKMR161VSN182MA30S	820		30×30	1.77	EKMR251VSN821MR30S
	2,200	30×45	3.23	EKMR161VSN222MR45S	820		35×25	1.60	EKMR251VSN821MA25S
	2,200	35×35	2.79	EKMR161VSN222MA35S	1,000		25.4×50	2.40	EKMR251VSN102MQ50S
2,700	30×50	3.66	EKMR161VSN272MR50S	1,000	30×35		2.03	EKMR251VSN102MR35S	
2,700	35×40	3.23	EKMR161VSN272MA40S	1,200	30×40		2.31	EKMR251VSN122MR40S	
3,300	35×45	3.68	EKMR161VSN332MA45S	1,200	30×45		2.38	EKMR251VSN122MR45S	
3,900	35×50	4.12	EKMR161VSN392MA50S	1,200	35×30		2.02	EKMR251VSN122MA30S	
180	470	22×25	1.45	EKMR181VSN471MP25S	1,200		35×35	2.06	EKMR251VSN122MA35S
	560	22×30	1.66	EKMR181VSN561MP30S	1,500	30×50	2.73	EKMR251VSN152MR50S	
	680	22×35	1.87	EKMR181VSN681MP35S	1,500	35×40	2.41	EKMR251VSN152MA40S	
	680	25.4×25	1.72	EKMR181VSN681MQ25S	1,800	35×45	2.72	EKMR251VSN182MA45S	
	820	22×40	2.11	EKMR181VSN821MP40S	2,200	35×50	3.10	EKMR251VSN222MA50S	
	820	25.4×30	1.94	EKMR181VSN821MQ30S	315	180	22×25	0.91	EKMR3B1VSN181MP25S
	1,000	22×45	2.38	EKMR181VSN102MP45S		220	22×30	1.06	EKMR3B1VSN221MP30S
	1,000	25.4×35	2.24	EKMR181VSN102MQ35S		270	22×35	1.20	EKMR3B1VSN271MP35S
	1,000	30×25	1.90	EKMR181VSN102MR25S		270	25.4×25	1.15	EKMR3B1VSN271MQ25S
	1,200	22×50	2.69	EKMR181VSN122MP50S		330	22×40	1.37	EKMR3B1VSN331MP40S
	1,200	25.4×40	2.52	EKMR181VSN122MQ40S		330	25.4×30	1.30	EKMR3B1VSN331MQ30S
	1,200	30×30	2.14	EKMR181VSN122MR30S		390	22×45	1.52	EKMR3B1VSN391MP45S
	1,200	35×25	1.94	EKMR181VSN122MA25S		390	25.4×35	1.48	EKMR3B1VSN391MQ35S
	1,500	25.4×45	2.88	EKMR181VSN152MQ45S		390	30×25	1.39	EKMR3B1VSN391MR25S
	1,500	25.4×50	2.94	EKMR181VSN152MQ50S		470	22×50	1.72	EKMR3B1VSN471MP50S
	1,500	30×35	2.49	EKMR181VSN152MR35S		470	25.4×40	1.67	EKMR3B1VSN471MQ40S
	1,800	30×40	2.82	EKMR181VSN182MR40S		470	30×30	1.57	EKMR3B1VSN471MR30S
	1,800	35×30	2.47	EKMR181VSN182MA30S		470	35×25	1.52	EKMR3B1VSN471MA25S
	2,200	30×45	3.23	EKMR181VSN222MR45S		560	25.4×45	1.86	EKMR3B1VSN561MQ45S
	2,200	30×50	3.31	EKMR181VSN222MR50S		560	30×35	1.78	EKMR3B1VSN561MR35S
2,200	35×35	2.79	EKMR181VSN222MA35S	680		25.4×50	2.10	EKMR3B1VSN681MQ50S	
2,200	35×40	2.92	EKMR181VSN222MA40S	680		30×40	2.03	EKMR3B1VSN681MR40S	
2,700	35×45	3.33	EKMR181VSN272MA45S	680		35×30	1.90	EKMR3B1VSN681MA30S	
3,300	35×50	3.79	EKMR181VSN332MA50S	820		30×45	2.31	EKMR3B1VSN821MR45S	
200	470	22×25	1.45	EKMR201VSN471MP25S		820	35×35	2.13	EKMR3B1VSN821MA35S
	560	22×30	1.66	EKMR201VSN561MP30S	1,000	30×50	2.61	EKMR3B1VSN102MR50S	
	560	25.4×25	1.56	EKMR201VSN561MQ25S	1,000	35×40	2.46	EKMR3B1VSN102MA40S	
	680	22×35	1.87	EKMR201VSN681MP35S	1,200	35×45	2.78	EKMR3B1VSN122MA45S	
	680	25.4×30	1.77	EKMR201VSN681MQ30S	1,200	35×50	2.86	EKMR3B1VSN122MA50S	
	820	22×40	2.11	EKMR201VSN821MP40S	350	150	22×25	0.84	EKMR351VSN151MP25S
	820	25.4×35	2.03	EKMR201VSN821MQ35S		220	22×30	1.06	EKMR351VSN221MP30S
	820	30×25	1.72	EKMR201VSN821MR25S		220	25.4×25	1.04	EKMR351VSN221MQ25S
	1,000	22×45	2.38	EKMR201VSN102MP45S		270	22×35	1.20	EKMR351VSN271MP35S
	1,000	22×50	2.45	EKMR201VSN102MP50S		270	25.4×30	1.18	EKMR351VSN271MQ30S
	1,000	25.4×40	2.30	EKMR201VSN102MQ40S		330	22×40	1.37	EKMR351VSN331MP40S
	1,000	30×30	1.95	EKMR201VSN102MR30S		330	22×45	1.40	EKMR351VSN331MP45S
	1,200	25.4×45	2.58	EKMR201VSN122MQ45S		330	25.4×35	1.36	EKMR351VSN331MQ35S
	1,200	30×35	2.23	EKMR201VSN122MR35S		330	30×25	1.28	EKMR351VSN331MR25S
	1,200	35×25	1.94	EKMR201VSN122MA25S		390	22×50	1.56	EKMR351VSN391MP50S
	1,500	25.4×50	2.94	EKMR201VSN152MQ50S		390	25.4×40	1.52	EKMR351VSN391MQ40S
	1,500	30×40	2.58	EKMR201VSN152MR40S		390	30×30	1.43	EKMR351VSN391MR30S
	1,500	35×30	2.25	EKMR201VSN152MA30S		390	35×25	1.38	EKMR351VSN391MA25S
	1,800	30×45	2.92	EKMR201VSN182MR45S		470	25.4×45	1.71	EKMR351VSN471MQ45S

New!

KMR Series

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C, 120Hz)	Part No.	
350	560	25.4×50	1.90	EKMR351VSN561MQ50S	420	220	25.4×35	1.16	EKMR421VSN221MQ35S	
	560	30×35	1.78	EKMR351VSN561MR35S		220	30×25	1.11	EKMR421VSN221MR25S	
	560	30×40	1.84	EKMR351VSN561MR40S		270	22×50	1.36	EKMR421VSN271MP50S	
	560	35×30	1.72	EKMR351VSN561MA30S		270	25.4×40	1.32	EKMR421VSN271MQ40S	
	680	30×45	2.10	EKMR351VSN681MR45S		270	30×30	1.26	EKMR421VSN271MR30S	
	680	35×35	1.94	EKMR351VSN681MA35S		270	35×25	1.26	EKMR421VSN271MA25S	
	820	30×50	2.36	EKMR351VSN821MR50S		330	25.4×45	1.49	EKMR421VSN331MQ45S	
	820	35×40	2.23	EKMR351VSN821MA40S		330	30×35	1.45	EKMR421VSN331MR35S	
	1,000	35×45	2.54	EKMR351VSN102MA45S		390	25.4×50	1.66	EKMR421VSN391MQ50S	
	1,200	35×50	2.86	EKMR351VSN122MA50S		390	30×40	1.63	EKMR421VSN391MR40S	
400	120	22×25	0.75	EKMR401VSN121MP25S	420	390	35×30	1.58	EKMR421VSN391MA30S	
	180	22×30	0.96	EKMR401VSN181MP30S		470	30×45	1.85	EKMR421VSN471MR45S	
	180	25.4×25	0.94	EKMR401VSN181MQ25S		470	35×35	1.77	EKMR421VSN471MA35S	
	220	22×35	1.09	EKMR401VSN221MP35S		560	30×50	2.07	EKMR421VSN561MR50S	
	220	25.4×30	1.07	EKMR401VSN221MQ30S		560	35×40	2.02	EKMR421VSN561MA40S	
	270	22×40	1.24	EKMR401VSN271MP40S		680	35×45	2.29	EKMR421VSN681MA45S	
	270	22×45	1.26	EKMR401VSN271MP45S		820	35×50	2.59	EKMR421VSN821MA50S	
	270	25.4×35	1.23	EKMR401VSN271MQ35S		450	100	22×25	0.71	EKMR451VSN101MP25S
	270	30×25	1.16	EKMR401VSN271MR25S			120	22×30	0.82	EKMR451VSN121MP30S
	330	22×50	1.44	EKMR401VSN331MP50S			150	22×35	0.94	EKMR451VSN151MP35S
	330	25.4×40	1.40	EKMR401VSN331MQ40S	150		25.4×25	0.89	EKMR451VSN151MQ25S	
	330	30×30	1.31	EKMR401VSN331MR30S	180		22×40	1.05	EKMR451VSN181MP40S	
	330	35×25	1.27	EKMR401VSN331MA25S	180		25.4×30	1.00	EKMR451VSN181MQ30S	
	390	25.4×45	1.55	EKMR401VSN391MA45S	220		22×45	1.19	EKMR451VSN221MP45S	
	390	30×35	1.49	EKMR401VSN391MR35S	220		25.4×35	1.16	EKMR451VSN221MQ35S	
	470	25.4×50	1.74	EKMR401VSN471MQ50S	220		30×25	1.11	EKMR451VSN221MR25S	
	470	30×40	1.69	EKMR401VSN471MR40S	270		22×50	1.36	EKMR451VSN271MP50S	
	420	470	35×30	1.58	EKMR401VSN471MA30S	270	25.4×40	1.32	EKMR451VSN271MQ40S	
		560	30×45	1.91	EKMR401VSN561MR45S	270	25.4×45	1.35	EKMR451VSN271MQ45S	
		560	35×35	1.76	EKMR401VSN561MA35S	270	30×30	1.26	EKMR451VSN271MR30S	
680		30×50	2.15	EKMR401VSN681MR50S	270	35×25	1.26	EKMR451VSN271MA25S		
680		35×40	2.03	EKMR401VSN681MA40S	330	25.4×50	1.52	EKMR451VSN331MQ50S		
820		35×45	2.30	EKMR401VSN821MA45S	330	30×35	1.45	EKMR451VSN331MR35S		
820		35×50	2.37	EKMR401VSN821MA50S	330	35×30	1.45	EKMR451VSN331MA30S		
120		22×25	0.78	EKMR421VSN121MP25S	390	30×40	1.63	EKMR451VSN391MR40S		
150		22×30	0.91	EKMR421VSN151MP30S	470	30×45	1.85	EKMR451VSN471MR45S		
150		25.4×25	0.89	EKMR421VSN151MQ25S	470	30×50	1.90	EKMR451VSN471MR50S		
420	180	22×35	1.03	EKMR421VSN181MP35S	470	35×35	1.77	EKMR451VSN471MA35S		
	180	25.4×30	1.00	EKMR421VSN181MQ30S	560	35×40	2.02	EKMR451VSN561MA40S		
	220	22×40	1.16	EKMR421VSN221MP40S	560	35×45	2.08	EKMR451VSN561MA45S		
	220	22×45	1.19	EKMR421VSN221MP45S	680	35×50	2.36	EKMR451VSN681MA50S		

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The ripple current gives aluminum electrolytic capacitors higher internal heat, the increased temperature accelerate the deterioration of the capacitors.

The lifetime is approximately halved with every 5°C rise.

SMQ Series

- Downsized from current downsized snap-ins SMH series
- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant

SMQ

↑
Downsized
SMH




◆ SPECIFICATIONS


Items	Characteristics			
Category	-25 to +85°C			
Temperature Range	-25 to +85°C			
Rated Voltage Range	160 to 450V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	I ≤ 3·C·V Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.			
	Capacitance change	≤ ±20% of the initial value		
	D.F. (tanδ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.			
	Capacitance change	≤ ±15% of the initial value		
	D.F. (tanδ)	≤ 150% of the initial specified value		
	Leakage current	≤ The initial specified value		

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

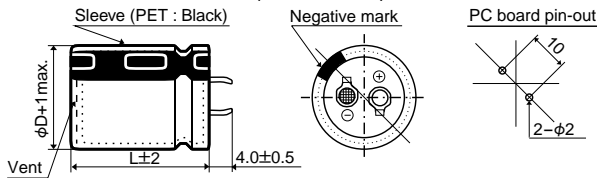


● Terminal Code : LI (φ35)

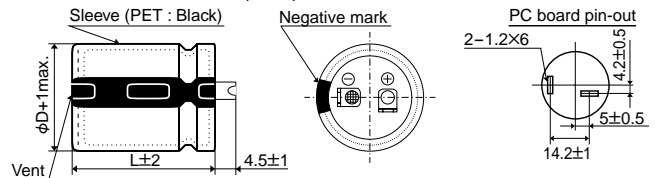

No plastic disk is the standard design.

◆ PART NUMBERING SYSTEM

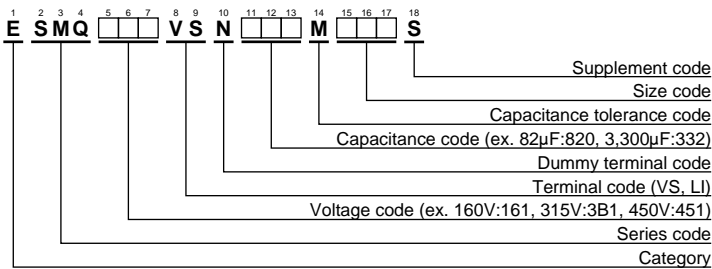

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
160	560	22×25	0.15	2.25	ESMQ161VSN561MP25S	250	270	22×25	0.15	1.31	ESMQ251VSN271MP25S
	680	22×30	0.15	2.50	ESMQ161VSN681MP30S		330	22×30	0.15	1.75	ESMQ251VSN331MP30S
	820	22×35	0.15	2.75	ESMQ161VSN821MP35S		390	22×30	0.15	1.91	ESMQ251VSN391MP30S
	1,000	22×40	0.15	3.00	ESMQ161VSN102MP40S		390	25.4×25	0.15	1.91	ESMQ251VSN391MQ25S
	1,000	25.4×30	0.15	3.00	ESMQ161VSN102MQ30S		470	22×35	0.15	2.11	ESMQ251VSN471MP35S
	1,200	22×45	0.15	3.25	ESMQ161VSN122MP45S		470	25.4×30	0.15	2.11	ESMQ251VSN471MQ30S
	1,200	25.4×35	0.15	3.25	ESMQ161VSN122MQ35S		560	22×40	0.15	2.25	ESMQ251VSN561MP40S
	1,200	30×25	0.15	3.25	ESMQ161VSN122MR25S		560	25.4×30	0.15	2.25	ESMQ251VSN561MQ30S
	1,500	22×50	0.15	3.73	ESMQ161VSN152MP50S		560	30×25	0.15	2.25	ESMQ251VSN561MR25S
	1,500	25.4×40	0.15	3.73	ESMQ161VSN152MQ40S		680	22×45	0.15	2.50	ESMQ251VSN681MP45S
	1,500	30×30	0.15	3.73	ESMQ161VSN152MR30S		680	25.4×35	0.15	2.50	ESMQ251VSN681MQ35S
	1,500	35×25	0.15	3.73	ESMQ161VSN152MA25S		680	30×30	0.15	2.50	ESMQ251VSN681MR30S
	1,800	25.4×45	0.15	4.20	ESMQ161VSN182MP45S		820	22×50	0.15	2.77	ESMQ251VSN821MP50S
	1,800	30×35	0.15	4.20	ESMQ161VSN182MR35S		820	25.4×40	0.15	2.77	ESMQ251VSN821MQ40S
	1,800	35×30	0.15	4.20	ESMQ161VSN182MA30S		820	30×30	0.15	2.77	ESMQ251VSN821MR30S
	2,200	30×40	0.15	4.78	ESMQ161VSN222MR40S		820	35×25	0.15	2.77	ESMQ251VSN821MA25S
	2,200	35×35	0.15	4.78	ESMQ161VSN222MA35S		1,000	25.4×45	0.15	3.32	ESMQ251VSN102MQ45S
	2,700	35×40	0.15	5.45	ESMQ161VSN272MA40S		1,000	30×35	0.15	3.32	ESMQ251VSN102MR35S
	3,300	35×45	0.15	5.75	ESMQ161VSN332MA45S		1,000	35×30	0.15	3.32	ESMQ251VSN102MA30S
	3,900	35×50	0.15	6.00	ESMQ161VSN392MA50S		1,200	30×40	0.15	3.53	ESMQ251VSN122MR40S
180	470	22×25	0.15	2.08	ESMQ181VSN471MP25S	1,200	35×35	0.15	3.53	ESMQ251VSN122MA35S	
	560	22×30	0.15	2.25	ESMQ181VSN561MP30S	1,500	30×50	0.15	4.04	ESMQ251VSN152MR50S	
	680	22×30	0.15	2.50	ESMQ181VSN681MP30S	1,500	35×40	0.15	4.04	ESMQ251VSN152MA40S	
	680	25.4×25	0.15	2.50	ESMQ181VSN681MQ25S	1,800	35×45	0.15	4.55	ESMQ251VSN182MA45S	
	820	22×35	0.15	2.75	ESMQ181VSN821MP35S	180	22×25	0.15	1.21	ESMQ351VSN181MP25S	
	820	25.4×30	0.15	2.75	ESMQ181VSN821MQ30S	220	22×30	0.15	1.41	ESMQ351VSN221MP30S	
	1,000	22×45	0.15	3.00	ESMQ181VSN102MP45S	270	22×30	0.15	1.60	ESMQ351VSN271MP30S	
	1,000	25.4×35	0.15	3.00	ESMQ181VSN102MQ35S	330	22×40	0.15	1.82	ESMQ351VSN331MP40S	
	1,000	30×25	0.15	3.00	ESMQ181VSN102MR25S	330	25.4×30	0.15	1.82	ESMQ351VSN331MQ30S	
	1,200	22×50	0.15	3.31	ESMQ181VSN122MP50S	330	30×25	0.15	1.82	ESMQ351VSN331MR25S	
	1,200	25.4×40	0.15	3.31	ESMQ181VSN122MQ40S	390	22×45	0.15	2.01	ESMQ351VSN391MP45S	
	1,200	30×30	0.15	3.31	ESMQ181VSN122MR30S	390	25.4×35	0.15	2.01	ESMQ351VSN391MQ35S	
	1,200	35×25	0.15	3.31	ESMQ181VSN122MA25S	390	30×30	0.15	2.01	ESMQ351VSN391MR30S	
	1,500	25.4×45	0.15	3.83	ESMQ181VSN152MQ45S	470	22×50	0.15	2.27	ESMQ351VSN471MP50S	
	1,500	30×35	0.15	3.83	ESMQ181VSN152MR35S	470	25.4×40	0.15	2.27	ESMQ351VSN471MQ40S	
	1,500	35×30	0.15	3.83	ESMQ181VSN152MA30S	470	30×30	0.15	2.27	ESMQ351VSN471MR30S	
	1,800	25.4×50	0.15	4.32	ESMQ181VSN182MQ50S	470	35×25	0.15	2.27	ESMQ351VSN471MA25S	
	1,800	30×40	0.15	4.32	ESMQ181VSN182MR40S	560	25.4×45	0.15	2.56	ESMQ351VSN561MQ45S	
	1,800	35×30	0.15	4.32	ESMQ181VSN182MA30S	560	30×35	0.15	2.56	ESMQ351VSN561MR35S	
	2,200	30×45	0.15	4.92	ESMQ181VSN222MR45S	560	35×30	0.15	2.56	ESMQ351VSN561MA30S	
2,200	35×40	0.15	4.92	ESMQ181VSN222MA40S	680	30×40	0.15	2.87	ESMQ351VSN681MR40S		
2,700	35×45	0.15	5.52	ESMQ181VSN272MA45S	680	35×35	0.15	2.87	ESMQ351VSN681MQ35S		
3,300	35×50	0.15	5.75	ESMQ181VSN332MA50S	820	30×45	0.15	3.25	ESMQ351VSN821MR45S		
200	390	22×25	0.15	1.68	ESMQ201VSN391MP25S	820	35×40	0.15	3.25	ESMQ351VSN821MA40S	
	470	22×30	0.15	1.85	ESMQ201VSN471MP30S	1,000	30×50	0.15	3.63	ESMQ351VSN102MR50S	
	560	22×30	0.15	2.43	ESMQ201VSN561MP30S	1,000	35×45	0.15	3.63	ESMQ351VSN102MA45S	
	560	25.4×25	0.15	2.43	ESMQ201VSN561MQ25S	150	22×25	0.15	1.12	ESMQ351VSN151MP25S	
	680	22×35	0.15	2.68	ESMQ201VSN681MP35S	180	22×30	0.15	1.22	ESMQ351VSN181MP30S	
	680	25.4×30	0.15	2.68	ESMQ201VSN681MQ30S	220	22×35	0.15	1.44	ESMQ351VSN221MP35S	
	820	22×40	0.15	2.93	ESMQ201VSN821MP40S	270	22×40	0.15	1.66	ESMQ351VSN271MP40S	
	820	25.4×30	0.15	2.93	ESMQ201VSN821MQ30S	270	25.4×30	0.15	1.66	ESMQ351VSN271MQ30S	
	820	30×25	0.15	2.93	ESMQ201VSN821MR25S	330	22×45	0.15	1.88	ESMQ351VSN331MP45S	
	1,000	22×45	0.15	3.25	ESMQ201VSN102MP45S	330	25.4×35	0.15	1.88	ESMQ351VSN331MQ35S	
	1,000	25.4×35	0.15	3.25	ESMQ201VSN102MQ35S	390	22×50	0.15	2.06	ESMQ351VSN391MP50S	
	1,000	30×30	0.15	3.25	ESMQ201VSN102MR30S	390	25.4×40	0.15	2.06	ESMQ351VSN391MQ40S	
	1,000	35×25	0.15	3.25	ESMQ201VSN102MA25S	390	30×30	0.15	2.06	ESMQ351VSN391MR30S	
	1,200	25.4×40	0.15	3.50	ESMQ201VSN122MQ40S	390	35×25	0.15	2.06	ESMQ351VSN391MA25S	
	1,200	30×30	0.15	3.50	ESMQ201VSN122MR30S	470	25.4×45	0.15	2.40	ESMQ351VSN471MP45S	
	1,200	35×30	0.15	3.50	ESMQ201VSN122MA30S	470	30×35	0.15	2.40	ESMQ351VSN471MR35S	
	1,500	25.4×50	0.15	3.87	ESMQ201VSN152MQ50S	470	35×30	0.15	2.40	ESMQ351VSN471MA30S	
	1,500	30×35	0.15	3.87	ESMQ201VSN152MR35S	560	25.4×50	0.15	2.60	ESMQ351VSN561MQ50S	
	1,500	35×30	0.15	3.87	ESMQ201VSN152MA30S	560	30×40	0.15	2.60	ESMQ351VSN561MR40S	
	1,800	30×45	0.15	4.32	ESMQ201VSN182MR45S	560	35×30	0.15	2.60	ESMQ351VSN561MA30S	
1,800	35×35	0.15	4.32	ESMQ201VSN182MA35S	680	30×45	0.15	2.96	ESMQ351VSN681MR45S		
2,200	30×50	0.15	4.92	ESMQ201VSN222MR50S	680	35×35	0.15	2.96	ESMQ351VSN681MA35S		
2,200	35×40	0.15	4.92	ESMQ201VSN222MA40S	820	30×50	0.15	3.25	ESMQ351VSN821MR50S		
2,700	35×50	0.15	5.45	ESMQ201VSN272MA50S	820	35×45	0.15	3.25	ESMQ351VSN821MA45S		

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	
350	1,000	35×50	0.15	3.54	ESMQ351VSN102MA50S	420	270	30×30	0.20	1.94	ESMQ421VSN271MR30S	
400	120	22×25	0.15	1.02	ESMQ401VSN121MP25S		330	25.4×45	0.20	2.17	ESMQ421VSN331MQ45S	
	150	22×30	0.15	1.16	ESMQ401VSN151MP30S		330	30×35	0.20	2.17	ESMQ421VSN331MR35S	
	180	22×35	0.15	1.44	ESMQ401VSN181MP35S		330	35×30	0.20	2.17	ESMQ421VSN331MA30S	
	220	22×40	0.15	1.49	ESMQ401VSN221MP40S		390	25.4×50	0.20	2.27	ESMQ421VSN391MQ50S	
	220	25.4×30	0.15	1.49	ESMQ401VSN221MQ30S		390	30×35	0.20	2.27	ESMQ421VSN391MR35S	
	270	22×45	0.15	1.67	ESMQ401VSN271MP45S		390	35×30	0.20	2.27	ESMQ421VSN391MA30S	
	270	25.4×35	0.15	1.67	ESMQ401VSN271MQ35S		470	30×40	0.20	2.61	ESMQ421VSN471MR40S	
	270	30×25	0.15	1.67	ESMQ401VSN271MP25S		470	35×35	0.20	2.61	ESMQ421VSN471MA35S	
	330	22×50	0.15	1.90	ESMQ401VSN331MP50S		560	30×50	0.20	2.82	ESMQ421VSN561MR50S	
	330	25.4×40	0.15	1.90	ESMQ401VSN331MQ40S		560	35×40	0.20	2.82	ESMQ421VSN561MA40S	
	330	30×30	0.15	1.90	ESMQ401VSN331MR30S		680	35×45	0.20	3.11	ESMQ421VSN681MA45S	
	330	35×25	0.15	1.90	ESMQ401VSN331MA25S		450	82	22×25	0.20	0.83	ESMQ451VSN820MP25S
	390	25.4×45	0.15	2.13	ESMQ401VSN391MQ45S			100	22×25	0.20	0.93	ESMQ451VSN101MP25S
	390	30×35	0.15	2.13	ESMQ401VSN391MR35S			120	22×30	0.20	1.04	ESMQ451VSN121MP30S
	390	35×30	0.15	2.13	ESMQ401VSN391MA30S			150	22×35	0.20	1.19	ESMQ451VSN151MP35S
470	25.4×50	0.15	2.39	ESMQ401VSN471MQ50S	150	25.4×25		0.20	1.19	ESMQ451VSN151MQ25S		
470	30×40	0.15	2.39	ESMQ401VSN471MR40S	180	22×40		0.20	1.35	ESMQ451VSN181MP40S		
470	35×30	0.15	2.39	ESMQ401VSN471MA30S	180	25.4×30		0.20	1.35	ESMQ451VSN181MQ30S		
560	30×45	0.15	2.69	ESMQ401VSN561MR45S	220	22×45		0.20	1.55	ESMQ451VSN221MP45S		
560	35×35	0.15	2.69	ESMQ401VSN561MA35S	220	25.4×40		0.20	1.55	ESMQ451VSN221MQ40S		
680	30×50	0.15	2.96	ESMQ401VSN681MR50S	220	30×30		0.20	1.55	ESMQ451VSN221MR30S		
680	35×40	0.15	2.96	ESMQ401VSN681MA40S	220	35×25		0.20	1.55	ESMQ451VSN221MA25S		
820	35×45	0.15	3.25	ESMQ401VSN821MA45S	270	22×50		0.20	1.78	ESMQ451VSN271MP50S		
420	100	22×25	0.20	0.97	ESMQ421VSN101MP25S	270		25.4×40	0.20	1.78	ESMQ451VSN271MQ40S	
	120	22×25	0.20	1.08	ESMQ421VSN121MP25S	270		30×30	0.20	1.78	ESMQ451VSN271MR30S	
	150	22×30	0.20	1.30	ESMQ421VSN151MP30S	330		25.4×50	0.20	2.01	ESMQ451VSN331MQ50S	
	150	25.4×25	0.20	1.30	ESMQ421VSN151MQ25S	330		30×40	0.20	2.01	ESMQ451VSN331MR40S	
	180	22×35	0.20	1.48	ESMQ421VSN181MP35S	330	35×30	0.20	2.01	ESMQ451VSN331MA30S		
	180	25.4×30	0.20	1.48	ESMQ421VSN181MQ30S	390	30×40	0.20	2.24	ESMQ451VSN391MR40S		
	220	22×40	0.20	1.65	ESMQ421VSN221MP40S	390	35×35	0.20	2.24	ESMQ451VSN391MA35S		
	220	25.4×35	0.20	1.65	ESMQ421VSN221MQ35S	470	30×45	0.20	2.53	ESMQ451VSN471MR45S		
	220	30×25	0.20	1.65	ESMQ421VSN221MR25S	470	35×40	0.20	2.53	ESMQ451VSN471MA40S		
	270	22×50	0.20	1.94	ESMQ421VSN271MP50S	560	30×50	0.20	2.82	ESMQ451VSN561MR50S		
	270	25.4×35	0.20	1.94	ESMQ421VSN271MQ35S	560	35×45	0.20	2.82	ESMQ451VSN561MA45S		

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers


Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Upgrade!

KMQ Series

- Downsized from current downsized snap-ins KMH series
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS


Items	Characteristics								
Category	-40 to +105°C (35&50V _{dc}), -25 to +105°C (160 to 450V _{dc})								
Temperature Range									
Rated Voltage Range	35&50V _{dc} , 160 to 450V _{dc}								
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)								
Leakage Current	I ≤ 3·C/V Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)								
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	35V		50V		160 to 250V	315 to 400V	420 & 450V	(at 20°C, 120Hz)
	Nominal capacitance (µF)	10,000>C	C ≥ 10,000	10,000>C	C ≥ 10,000	—	—	—	
	tanδ (Max.)	0.30	0.35	0.25	0.30	0.15	0.15	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	35&50V	160 to 250V	315 to 400V	420 & 450V				
	Z(-40°C)/Z(+20°C)	4	—	—	—				
	Z(-25°C)/Z(+20°C)	10	4	8	8				
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.								
	Capacitance change	≤ ±20% of the initial value							
	D.F. (tanδ)	≤ 200% of the initial specified value							
	Leakage current	≤ The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.								
	Capacitance change	≤ ±15% of the initial value							
	D.F. (tanδ)	≤ 150% of the initial specified value							
	Leakage current	≤ The initial specified value							

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

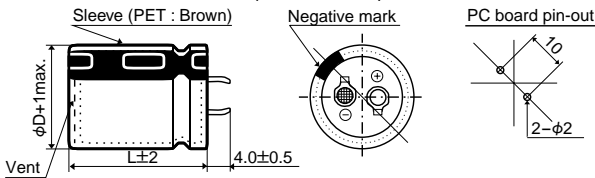


● Terminal Code : LI (φ35)

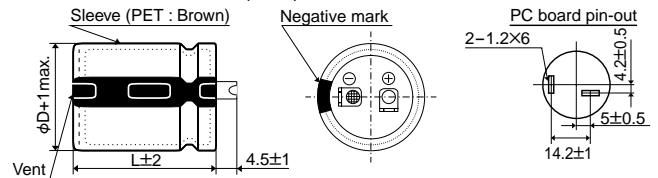

No plastic disk is the standard design.

◆ PART NUMBERING SYSTEM

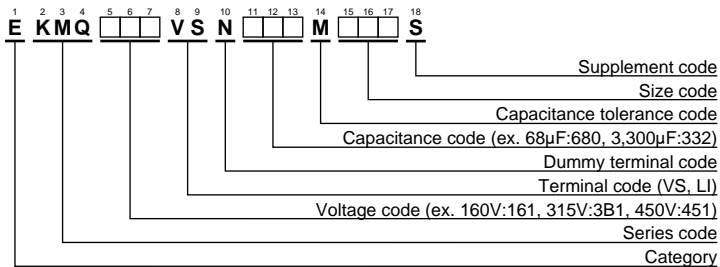

Please refer to "A guide to global code (snap-in type)"



Upgrade!

KMQ Series

◆ **STANDARD RATINGS**

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	
35	4,700	22×25	0.30	1.87	EKMQ350VSN472MP25S	160	1,800	30×40	0.15	2.70	EKMQ161VSN182MR40S	
	5,600	22×25	0.30	2.04	EKMQ350VSN562MP25S		1,800	35×30	0.15	2.70	EKMQ161VSN182MA30S	
	5,600	25.4×25	0.30	2.00	EKMQ350VSN562MQ25S		2,200	30×45	0.15	2.90	EKMQ161VSN222MR45S	
	6,800	22×30	0.30	2.36	EKMQ350VSN682MP30S		2,200	35×35	0.15	2.90	EKMQ161VSN222MA35S	
	6,800	25.4×25	0.30	2.21	EKMQ350VSN682MQ25S		2,700	30×50	0.15	3.10	EKMQ161VSN272MR50S	
	8,200	22×35	0.30	2.65	EKMQ350VSN822MP35S		2,700	35×40	0.15	3.10	EKMQ161VSN272MA40S	
	8,200	25.4×30	0.30	2.49	EKMQ350VSN822MQ30S		3,300	35×50	0.15	3.30	EKMQ161VSN332MA50S	
	8,200	30×25	0.30	2.62	EKMQ350VSN822MR25S		180	390	22×25	0.15	1.30	EKMQ181VSN391MP25S
	10,000	22×40	0.35	3.00	EKMQ350VSN103MP40S			470	22×30	0.15	1.40	EKMQ181VSN471MP30S
	10,000	25.4×35	0.35	2.88	EKMQ350VSN103MQ35S			560	22×30	0.15	1.50	EKMQ181VSN561MP30S
	10,000	30×25	0.35	2.90	EKMQ350VSN103MA25S	560		25.4×25	0.15	1.50	EKMQ181VSN102MQ25S	
	12,000	22×50	0.35	3.47	EKMQ350VSN123MP50S	680		22×35	0.15	1.70	EKMQ181VSN681MP35S	
	12,000	25.4×35	0.35	3.15	EKMQ350VSN123MQ35S	680		25.4×30	0.15	1.70	EKMQ181VSN681MQ30S	
	12,000	30×30	0.35	3.25	EKMQ350VSN123MR30S	820		22×40	0.15	2.00	EKMQ181VSN821MP40S	
	12,000	35×25	0.35	3.20	EKMQ350VSN123MA25S	820		25.4×30	0.15	2.00	EKMQ181VSN821MQ30S	
	15,000	25.4×40	0.35	3.61	EKMQ350VSN153MQ40S	820		30×25	0.15	2.00	EKMQ181VSN821MR25S	
	15,000	30×35	0.35	3.78	EKMQ350VSN153MR35S	1,000		22×45	0.15	2.20	EKMQ181VSN102MP45S	
	15,000	35×25	0.35	3.60	EKMQ350VSN153MA25S	1,000	25.4×40	0.15	2.20	EKMQ181VSN102MQ40S		
	18,000	25.4×50	0.35	4.14	EKMQ350VSN183MQ50S	1,000	30×30	0.15	2.20	EKMQ181VSN102MR30S		
	18,000	30×40	0.35	4.30	EKMQ350VSN183MR40S	1,000	35×25	0.15	2.20	EKMQ181VSN102MA25S		
18,000	35×30	0.35	4.10	EKMQ350VSN183MA30S	1,200	25.4×45	0.15	2.30	EKMQ181VSN122MQ45S			
22,000	30×50	0.35	5.00	EKMQ350VSN223MR50S	1,200	30×35	0.15	2.30	EKMQ181VSN122MR35S			
22,000	35×35	0.35	4.64	EKMQ350VSN223MA35S	1,200	35×30	0.15	2.30	EKMQ181VSN122MA30S			
27,000	35×40	0.35	5.37	EKMQ350VSN273MA40S	1,500	25.4×50	0.15	2.50	EKMQ181VSN152MQ50S			
33,000	35×50	0.35	6.00	EKMQ350VSN333MA50S	1,500	30×40	0.15	2.50	EKMQ181VSN152MR40S			
50	2,700	22×25	0.25	1.65	EKMQ500VSN272MP25S	1,500	35×30	0.15	2.50	EKMQ181VSN152MA30S		
	3,300	22×30	0.25	1.92	EKMQ500VSN332MP30S	1,800	30×45	0.15	2.70	EKMQ181VSN182MR45S		
	3,300	25.4×25	0.25	1.76	EKMQ500VSN332MQ25S	1,800	35×35	0.15	2.70	EKMQ181VSN182MA35S		
	3,900	22×30	0.25	2.08	EKMQ500VSN392MP30S	2,200	30×50	0.15	2.90	EKMQ181VSN222MR50S		
	3,900	25.4×25	0.25	2.04	EKMQ500VSN392MQ25S	2,200	35×40	0.15	2.90	EKMQ181VSN222MA40S		
	4,700	22×35	0.25	2.43	EKMQ500VSN472MP35S	2,700	35×50	0.15	3.10	EKMQ181VSN272MA50S		
	4,700	25.4×30	0.25	2.50	EKMQ500VSN472MQ30S	200	390	22×25	0.15	1.31	EKMQ201VSN391MP25S	
	4,700	30×25	0.25	2.29	EKMQ500VSN472MR25S		470	22×30	0.15	1.45	EKMQ201VSN471MP30S	
	5,600	22×40	0.25	2.63	EKMQ500VSN562MP40S		560	22×30	0.15	1.67	EKMQ201VSN561MP30S	
	5,600	25.4×35	0.25	2.61	EKMQ500VSN562MQ35S		560	25.4×25	0.15	1.67	EKMQ201VSN561MQ25S	
	5,600	30×25	0.25	2.80	EKMQ500VSN562MR25S		680	22×40	0.15	1.75	EKMQ201VSN681MP40S	
	6,800	22×50	0.25	3.05	EKMQ500VSN682MP50S		680	25.4×30	0.15	1.75	EKMQ201VSN681MQ30S	
	6,800	25.4×40	0.25	2.94	EKMQ500VSN682MQ40S		820	22×45	0.15	2.04	EKMQ201VSN821MP45S	
	6,800	30×30	0.25	3.30	EKMQ500VSN682MR30S		820	25.4×35	0.15	2.04	EKMQ201VSN821MQ35S	
	6,800	35×25	0.25	2.77	EKMQ500VSN682MA25S		820	30×25	0.15	2.04	EKMQ201VSN821MR25S	
	8,200	25.4×45	0.25	3.60	EKMQ500VSN822MQ45S		1,000	22×50	0.15	2.30	EKMQ201VSN102MP50S	
	8,200	30×35	0.25	3.60	EKMQ500VSN822MR35S	1,000	25.4×45	0.15	2.30	EKMQ201VSN102MQ45S		
	8,200	35×30	0.25	3.60	EKMQ500VSN822MA30S	1,000	30×30	0.15	2.30	EKMQ201VSN102MR30S		
	10,000	25.4×50	0.30	4.00	EKMQ500VSN103MQ50S	1,000	35×25	0.15	2.30	EKMQ201VSN102MA25S		
	10,000	30×40	0.30	4.00	EKMQ500VSN103MR40S	1,200	25.4×50	0.15	2.65	EKMQ201VSN122MQ50S		
10,000	35×30	0.30	4.00	EKMQ500VSN103MA30S	1,200	30×35	0.15	2.65	EKMQ201VSN122MR35S			
12,000	30×50	0.30	4.29	EKMQ500VSN123MR50S	1,200	35×30	0.15	2.65	EKMQ201VSN122MA30S			
12,000	35×35	0.30	4.37	EKMQ500VSN123MA35S	1,500	30×40	0.15	2.80	EKMQ201VSN152MR40S			
15,000	35×40	0.30	4.50	EKMQ500VSN153MA40S	1,500	35×30	0.15	2.80	EKMQ201VSN152MA30S			
18,000	35×50	0.30	5.30	EKMQ500VSN183MA50S	1,800	30×45	0.15	3.08	EKMQ201VSN182MR45S			
160	470	22×25	0.15	1.40	EKMQ161VSN471MP25S	1,800	35×40	0.15	3.08	EKMQ201VSN182MA40S		
	560	22×30	0.15	1.50	EKMQ161VSN561MP30S	2,200	35×45	0.15	3.48	EKMQ201VSN222MA45S		
	680	22×30	0.15	1.70	EKMQ161VSN681MP30S	250	220	22×25	0.15	1.00	EKMQ251VSN221MP25S	
	680	25.4×25	0.15	1.70	EKMQ161VSN681MQ25S		270	22×25	0.15	1.10	EKMQ251VSN271MP25S	
	820	22×35	0.15	2.00	EKMQ161VSN821MP35S		330	22×30	0.15	1.20	EKMQ251VSN331MP30S	
	820	25.4×30	0.15	2.00	EKMQ161VSN821MQ30S		330	25.4×25	0.15	1.20	EKMQ251VSN331MQ25S	
	820	30×25	0.15	2.00	EKMQ161VSN821MR25S		390	22×35	0.15	1.30	EKMQ251VSN391MP35S	
	1,000	22×40	0.15	2.20	EKMQ161VSN102MP40S		390	25.4×25	0.15	1.30	EKMQ251VSN391MQ25S	
	1,000	25.4×35	0.15	2.20	EKMQ161VSN102MQ35S		470	22×40	0.15	1.40	EKMQ251VSN471MP40S	
	1,000	30×25	0.15	2.20	EKMQ161VSN102MR25S		470	25.4×30	0.15	1.40	EKMQ251VSN471MQ30S	
	1,200	25.4×40	0.15	2.30	EKMQ161VSN122MQ40S		470	30×25	0.15	1.40	EKMQ251VSN471MR25S	
	1,200	30×30	0.15	2.30	EKMQ161VSN122MR30S		560	22×45	0.15	1.50	EKMQ251VSN561MP45S	
	1,200	35×25	0.15	2.30	EKMQ161VSN122MA25S	560	25.4×35	0.15	1.50	EKMQ251VSN561MQ35S		
	1,500	25.4×45	0.15	2.50	EKMQ161VSN152MQ45S	560	30×25	0.15	1.50	EKMQ251VSN561MR25S		
	1,500	30×35	0.15	2.50	EKMQ161VSN152MR35S	680	22×50	0.15	1.70	EKMQ251VSN681MP50S		
	1,500	35×30	0.15	2.50	EKMQ161VSN152MA30S	680	25.4×40	0.15	1.70	EKMQ251VSN681MQ40S		
	1,800	25.4×50	0.15	2.70	EKMQ161VSN182MQ50S	680	30×30	0.15	1.70	EKMQ251VSN681MR30S		



Upgrade!

KMQ Series

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
250	680	35×25	0.15	1.70	EKMQ251VSN681MA25S	400	270	25.4×40	0.15	1.22	EKMQ401VSN271MQ40S
	820	25.4×45	0.15	2.00	EKMQ251VSN821MQ45S		270	30×30	0.15	1.22	EKMQ401VSN271MR30S
	820	30×35	0.15	2.00	EKMQ251VSN821MR35S		270	35×25	0.15	1.22	EKMQ401VSN271MA25S
	820	35×30	0.15	2.00	EKMQ251VSN821MA30S		330	25.4×45	0.15	1.44	EKMQ401VSN331MQ45S
	1,000	30×40	0.15	2.20	EKMQ251VSN102MR40S		330	30×35	0.15	1.44	EKMQ401VSN331MR35S
	1,000	35×30	0.15	2.20	EKMQ251VSN102MA30S		330	35×30	0.15	1.44	EKMQ401VSN331MA30S
	1,200	30×45	0.15	2.30	EKMQ251VSN122MR45S		390	25.4×50	0.15	1.55	EKMQ401VSN391MQ50S
	1,200	35×35	0.15	2.30	EKMQ251VSN122MA35S		390	30×40	0.15	1.55	EKMQ401VSN391MR40S
	1,500	35×45	0.15	2.50	EKMQ251VSN152MA45S		390	35×30	0.15	1.55	EKMQ401VSN391MA30S
	1,800	35×50	0.15	2.70	EKMQ251VSN182MA50S		470	30×45	0.15	1.68	EKMQ401VSN471MR45S
315	150	22×25	0.15	0.82	EKMQ3B1VSN151MP25S	470	35×35	0.15	1.68	EKMQ401VSN471MA35S	
	180	22×30	0.15	0.90	EKMQ3B1VSN181MP30S	560	30×50	0.15	1.90	EKMQ401VSN561MR50S	
	220	22×30	0.15	1.00	EKMQ3B1VSN221MR30S	560	35×40	0.15	1.90	EKMQ401VSN561MA40S	
	220	25.4×25	0.15	1.00	EKMQ3B1VSN221MQ25S	680	35×45	0.15	2.12	EKMQ401VSN681MA45S	
	270	22×35	0.15	1.10	EKMQ3B1VSN271MP35S	82	22×25	0.20	0.64	EKMQ421VSN820MP25S	
	270	25.4×30	0.15	1.10	EKMQ3B1VSN271MQ30S	100	22×25	0.20	0.66	EKMQ421VSN101MP25S	
	330	22×45	0.15	1.20	EKMQ3B1VSN331MP45S	100	25.4×25	0.20	0.66	EKMQ421VSN101MQ25S	
	330	25.4×35	0.15	1.20	EKMQ3B1VSN331MQ35S	120	22×30	0.20	0.81	EKMQ421VSN121MP30S	
	330	30×25	0.15	1.20	EKMQ3B1VSN331MR25S	120	25.4×25	0.20	0.81	EKMQ421VSN121MQ25S	
	390	22×45	0.15	1.30	EKMQ3B1VSN391MP45S	150	22×35	0.20	0.84	EKMQ421VSN151MP35S	
	390	25.4×40	0.15	1.30	EKMQ3B1VSN391MQ40S	150	25.4×30	0.20	0.84	EKMQ421VSN151MQ30S	
	390	30×30	0.15	1.30	EKMQ3B1VSN391MR30S	150	30×25	0.20	0.84	EKMQ421VSN151MR25S	
	390	35×25	0.15	1.30	EKMQ3B1VSN391MA25S	180	22×40	0.20	0.91	EKMQ421VSN181MP40S	
	470	25.4×45	0.15	1.40	EKMQ3B1VSN471MQ45S	180	25.4×30	0.20	0.91	EKMQ421VSN181MQ30S	
	470	30×35	0.15	1.40	EKMQ3B1VSN471MR35S	180	30×25	0.20	0.91	EKMQ421VSN181MR25S	
	470	35×25	0.15	1.40	EKMQ3B1VSN471MA25S	220	22×45	0.20	1.05	EKMQ421VSN221MP45S	
	560	25.4×50	0.15	1.50	EKMQ3B1VSN561MQ50S	220	25.4×35	0.20	1.05	EKMQ421VSN221MQ35S	
	560	30×40	0.15	1.50	EKMQ3B1VSN561MR40S	220	30×30	0.20	1.05	EKMQ421VSN221MR30S	
	560	35×30	0.15	1.50	EKMQ3B1VSN561MA30S	220	35×25	0.20	1.05	EKMQ421VSN221MA25S	
	680	30×45	0.15	1.70	EKMQ3B1VSN681MR45S	270	25.4×40	0.20	1.25	EKMQ421VSN271MQ40S	
680	35×35	0.15	1.70	EKMQ3B1VSN681MA35S	270	30×30	0.20	1.25	EKMQ421VSN271MR30S		
820	30×50	0.15	2.00	EKMQ3B1VSN821MR50S	270	35×25	0.20	1.25	EKMQ421VSN271MA25S		
820	35×40	0.15	2.00	EKMQ3B1VSN821MA40S	330	25.4×50	0.20	1.42	EKMQ421VSN331MQ50S		
1,000	35×45	0.15	2.30	EKMQ3B1VSN102MA45S	330	30×35	0.20	1.42	EKMQ421VSN331MR35S		
350	120	22×25	0.15	0.75	EKMQ351VSN121MP25S	330	35×30	0.20	1.42	EKMQ421VSN331MA30S	
	150	22×30	0.15	0.82	EKMQ351VSN151MP30S	390	30×40	0.20	1.61	EKMQ421VSN391MR40S	
	180	22×30	0.15	0.90	EKMQ351VSN181MP30S	390	35×35	0.20	1.61	EKMQ421VSN391MA35S	
	180	25.4×25	0.15	0.90	EKMQ351VSN181MQ25S	470	30×45	0.20	1.86	EKMQ421VSN471MR45S	
	220	22×35	0.15	1.00	EKMQ351VSN221MP35S	470	35×40	0.20	1.86	EKMQ421VSN471MA40S	
	220	25.4×30	0.15	1.00	EKMQ351VSN221MQ30S	560	35×45	0.20	2.10	EKMQ421VSN561MA45S	
	270	22×40	0.15	1.10	EKMQ351VSN271MP40S	680	35×50	0.20	2.20	EKMQ421VSN681MA50S	
	270	25.4×30	0.15	1.10	EKMQ351VSN271MQ30S	68	22×25	0.20	0.50	EKMQ451VSN680MP25S	
	270	30×25	0.15	1.10	EKMQ351VSN271MR25S	82	22×30	0.20	0.56	EKMQ451VSN820MP30S	
	330	22×45	0.15	1.20	EKMQ351VSN331MP45S	100	22×30	0.20	0.64	EKMQ451VSN101MP30S	
	330	25.4×40	0.15	1.20	EKMQ351VSN331MQ40S	100	25.4×25	0.20	0.64	EKMQ451VSN101MQ25S	
	330	30×30	0.15	1.20	EKMQ351VSN331MR30S	120	22×35	0.20	0.72	EKMQ451VSN121MP35S	
	390	25.4×45	0.15	1.30	EKMQ351VSN391MQ45S	120	25.4×30	0.20	0.72	EKMQ451VSN121MQ30S	
	390	30×35	0.15	1.30	EKMQ351VSN391MR35S	150	22×40	0.20	0.79	EKMQ451VSN151MP40S	
	470	25.4×50	0.15	1.40	EKMQ351VSN471MQ50S	150	25.4×30	0.20	0.79	EKMQ451VSN151MQ30S	
	470	30×35	0.15	1.40	EKMQ351VSN471MR35S	150	30×25	0.20	0.79	EKMQ451VSN151MR25S	
	470	35×30	0.15	1.40	EKMQ351VSN471MA30S	180	22×45	0.20	0.87	EKMQ451VSN181MP45S	
	560	30×45	0.15	1.50	EKMQ351VSN561MR45S	180	25.4×40	0.20	0.87	EKMQ451VSN181MQ40S	
	560	35×35	0.15	1.50	EKMQ351VSN561MA35S	180	30×30	0.20	0.87	EKMQ451VSN181MR30S	
	680	30×50	0.15	1.70	EKMQ351VSN681MR50S	220	25.4×45	0.20	1.00	EKMQ451VSN221MQ45S	
680	35×40	0.15	1.70	EKMQ351VSN681MA40S	220	30×30	0.20	1.00	EKMQ451VSN221MR30S		
820	35×45	0.15	1.90	EKMQ351VSN821MA45S	220	35×25	0.20	1.00	EKMQ451VSN221MA25S		
400	100	22×25	0.15	0.70	EKMQ401VSN101MP25S	270	25.4×50	0.20	1.19	EKMQ451VSN271MQ50S	
	120	22×30	0.15	0.75	EKMQ401VSN121MP30S	270	30×40	0.20	1.19	EKMQ451VSN271MR40S	
	150	22×30	0.15	0.88	EKMQ401VSN151MP30S	270	35×30	0.20	1.19	EKMQ451VSN271MA30S	
	150	25.4×25	0.15	0.88	EKMQ401VSN151MQ25S	330	30×45	0.20	1.38	EKMQ451VSN331MR45S	
	180	22×35	0.15	0.95	EKMQ401VSN181MP35S	330	35×35	0.20	1.38	EKMQ451VSN331MA35S	
	180	25.4×30	0.15	0.95	EKMQ401VSN181MQ30S	390	30×50	0.20	1.55	EKMQ451VSN391MR50S	
	220	22×45	0.15	1.10	EKMQ401VSN221MP45S	390	35×40	0.20	1.55	EKMQ451VSN391MA40S	
	220	25.4×35	0.15	1.10	EKMQ401VSN221MQ35S	470	35×45	0.20	1.74	EKMQ451VSN471MA45S	
	220	30×25	0.15	1.10	EKMQ401VSN221MR25S	560	35×50	0.20	1.90	EKMQ451VSN561MA50S	
	270	22×50	0.15	1.22	EKMQ401VSN271MP50S						



Upgrade!

KMQ Series

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
35, 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SMM Series

- Downsize, longer life, and high ripple version of SMH series
- Endurance with ripple current : 3,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant

SMM

↑ Downsized
Longer life
Higher ripple
SMH




◆SPECIFICATIONS

Items	Characteristics		
Category Temperature Range	-25 to +85°C		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	$I \leq 3\sqrt{CV}$ (at 20°C after 5 minutes) Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 85°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

◆DIMENSIONS [mm]


- Terminal Code : VS (φ20 to φ35) : Standard

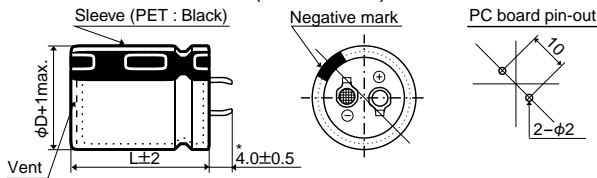


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

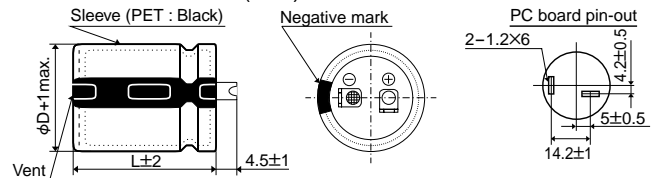

◆PART NUMBERING SYSTEM

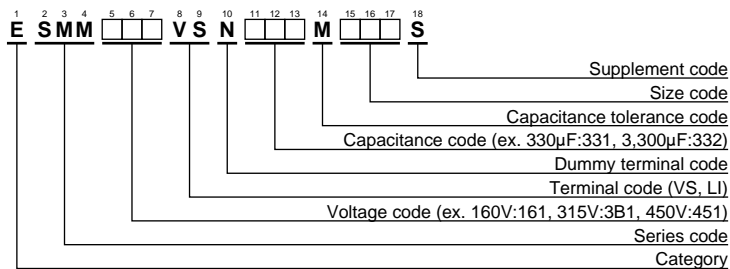

Please refer to "A guide to global code (snap-in type)"

◆RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

VV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	VV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	
160	270	20×25	0.15	1.28	ESMM161VSN271MN25S	180	1,200	25.4×45	0.15	3.63	ESMM181VSN122MQ45S	
	270	22×20	0.15	1.30	ESMM161VSN271MP20S		1,200	30×35	0.15	3.55	ESMM181VSN122MR35S	
	330	20×25	0.15	1.55	ESMM161VSN331MN25S		1,200	35×30	0.15	3.49	ESMM181VSN122MA30S	
	390	20×30	0.15	1.63	ESMM161VSN391MN30S		1,500	30×40	0.15	4.10	ESMM181VSN152MR40S	
	390	22×25	0.15	1.63	ESMM161VSN391MP25S		1,500	35×35	0.15	4.02	ESMM181VSN152MA35S	
	390	25.4×20	0.15	1.62	ESMM161VSN391MQ20S		1,800	30×45	0.15	4.55	ESMM181VSN182MR45S	
	470	20×30	0.15	1.90	ESMM161VSN471MN30S		1,800	35×35	0.15	4.54	ESMM181VSN182MA35S	
	470	22×30	0.15	1.86	ESMM161VSN471MP30S		2,200	35×40	0.15	4.83	ESMM181VSN222MA40S	
	470	25.4×25	0.15	1.86	ESMM161VSN471MQ25S		2,700	35×50	0.15	5.30	ESMM181VSN272MA50S	
	560	20×35	0.15	2.14	ESMM161VSN561MN35S		200	220	20×25	0.15	1.19	ESMM201VSN221MN25S
	560	22×30	0.15	2.15	ESMM161VSN561MP30S			220	22×20	0.15	1.18	ESMM201VSN221MP20S
	560	25.4×25	0.15	2.15	ESMM161VSN561MQ25S			270	20×25	0.15	1.39	ESMM201VSN271MN25S
	560	30×20	0.15	2.05	ESMM161VSN561MP20S			270	22×25	0.15	1.37	ESMM201VSN271MP25S
	680	20×40	0.15	2.35	ESMM161VSN681MN40S			270	25.4×20	0.15	1.35	ESMM201VSN271MQ20S
	680	22×35	0.15	2.35	ESMM161VSN681MP35S			330	20×30	0.15	1.56	ESMM201VSN331MN30S
	680	25.4×30	0.15	2.33	ESMM161VSN681MQ30S	330		22×25	0.15	1.51	ESMM201VSN331MP25S	
	680	30×25	0.15	2.33	ESMM161VSN681MR25S	330		25.4×20	0.15	1.49	ESMM201VSN331MQ20S	
	680	35×20	0.15	2.26	ESMM161VSN681MA20S	390		20×35	0.15	1.74	ESMM201VSN391MN35S	
	820	20×45	0.15	2.64	ESMM161VSN821MN45S	390		22×30	0.15	1.73	ESMM201VSN391MP30S	
	820	22×40	0.15	2.68	ESMM161VSN821MP40S	390		25.4×25	0.15	1.71	ESMM201VSN391MQ25S	
	820	25.4×30	0.15	2.65	ESMM161VSN821MQ30S	390		30×20	0.15	1.71	ESMM201VSN391MR20S	
	820	30×25	0.15	2.64	ESMM161VSN821MR25S	470		20×35	0.15	2.03	ESMM201VSN471MN35S	
	820	35×20	0.15	2.49	ESMM161VSN821MA20S	470		22×30	0.15	1.97	ESMM201VSN471MP30S	
	1,000	22×45	0.15	3.02	ESMM161VSN102MP45S	470		25.4×25	0.15	1.95	ESMM201VSN471MQ25S	
	1,000	25.4×35	0.15	3.00	ESMM161VSN102MQ35S	470		30×20	0.15	1.88	ESMM201VSN471MR20S	
	1,000	30×30	0.15	2.96	ESMM161VSN102MR30S	560		20×40	0.15	2.18	ESMM201VSN561MN40S	
	1,000	35×25	0.15	3.13	ESMM161VSN102MA25S	560		22×35	0.15	2.18	ESMM201VSN561MP35S	
	1,200	22×50	0.15	3.47	ESMM161VSN122MP50S	560	25.4×30	0.15	2.15	ESMM201VSN561MQ30S		
	1,200	25.4×40	0.15	3.43	ESMM161VSN122MQ40S	560	30×25	0.15	2.15	ESMM201VSN561MR25S		
	1,200	30×30	0.15	3.41	ESMM161VSN122MR30S	560	35×20	0.15	2.05	ESMM201VSN561MA20S		
	1,200	35×25	0.15	3.40	ESMM161VSN122MA25S	680	20×50	0.15	2.48	ESMM201VSN681MN50S		
	1,500	25.4×50	0.15	3.96	ESMM161VSN152MQ50S	680	22×40	0.15	2.48	ESMM201VSN681MP40S		
	1,500	30×35	0.15	3.96	ESMM161VSN152MR35S	680	25.4×30	0.15	2.48	ESMM201VSN681MQ30S		
1,500	35×30	0.15	3.94	ESMM161VSN152MA30S	680	30×25	0.15	2.48	ESMM201VSN681MR25S			
1,800	30×40	0.15	4.31	ESMM161VSN182MR40S	680	35×20	0.15	2.36	ESMM201VSN681MA20S			
1,800	35×35	0.15	4.28	ESMM161VSN182MA35S	820	22×45	0.15	2.81	ESMM201VSN821MP45S			
2,200	30×50	0.15	4.96	ESMM161VSN222MR50S	820	25.4×35	0.15	2.79	ESMM201VSN821MQ35S			
2,200	35×40	0.15	4.96	ESMM161VSN222MA40S	820	30×30	0.15	2.80	ESMM201VSN821MR30S			
2,700	35×45	0.15	5.57	ESMM161VSN272MA45S	820	35×25	0.15	2.83	ESMM201VSN821MA25S			
3,300	35×50	0.15	6.21	ESMM161VSN332MA50S	1,000	22×50	0.15	3.28	ESMM201VSN102MP50S			
180	220	22×20	0.15	1.18	ESMM181VSN221MP20S	1,000	25.4×40	0.15	3.28	ESMM201VSN102MQ40S		
	270	20×25	0.15	1.29	ESMM181VSN271MN25S	1,000	30×35	0.15	3.15	ESMM201VSN102MR35S		
	330	20×30	0.15	1.77	ESMM181VSN331MN30S	1,000	35×30	0.15	3.26	ESMM201VSN102MA30S		
	330	22×25	0.15	1.77	ESMM181VSN331MP25S	1,200	25.4×45	0.15	3.61	ESMM201VSN122MQ45S		
	330	25.4×20	0.15	1.49	ESMM181VSN331MQ20S	1,200	30×35	0.15	3.61	ESMM201VSN122MR35S		
	390	20×30	0.15	1.84	ESMM181VSN391MN30S	1,200	35×30	0.15	3.57	ESMM201VSN122MA30S		
	390	22×25	0.15	1.84	ESMM181VSN391MP25S	1,500	30×45	0.15	4.13	ESMM201VSN152MR45S		
	470	20×35	0.15	1.91	ESMM181VSN471MN35S	1,500	35×35	0.15	4.06	ESMM201VSN152MA35S		
	470	22×30	0.15	1.91	ESMM181VSN471MP30S	1,800	30×50	0.15	4.60	ESMM201VSN182MR50S		
	470	25.4×25	0.15	2.08	ESMM181VSN471MQ25S	1,800	35×40	0.15	4.59	ESMM201VSN182MA40S		
	470	30×20	0.15	1.88	ESMM181VSN471MR20S	2,200	35×45	0.15	5.25	ESMM201VSN222MA45S		
	560	20×40	0.15	2.15	ESMM181VSN561MN40S	220	180	22×20	0.15	1.06	ESMM221VSN181MP20S	
	560	22×35	0.15	2.25	ESMM181VSN561MP35S		220	20×25	0.15	1.25	ESMM221VSN221MN25S	
	560	25.4×25	0.15	2.25	ESMM181VSN561MQ25S		270	20×30	0.15	1.46	ESMM221VSN271MN30S	
	680	20×45	0.15	2.41	ESMM181VSN681MN45S		270	22×25	0.15	1.47	ESMM221VSN271MP25S	
	680	22×35	0.15	2.48	ESMM181VSN681MP35S		270	25.4×20	0.15	1.35	ESMM221VSN271MQ20S	
	680	25.4×30	0.15	2.50	ESMM181VSN681MQ30S		330	20×35	0.15	1.64	ESMM221VSN331MN35S	
	680	30×25	0.15	2.46	ESMM181VSN681MR25S		330	22×30	0.15	1.70	ESMM221VSN331MP30S	
	680	35×20	0.15	2.26	ESMM181VSN681MA20S		330	25.4×25	0.15	1.69	ESMM221VSN331MQ25S	
	820	20×50	0.15	2.72	ESMM181VSN821MN50S		330	30×20	0.15	1.58	ESMM221VSN331MR20S	
	820	22×40	0.15	2.86	ESMM181VSN821MP40S		390	20×35	0.15	1.84	ESMM221VSN391MN35S	
	820	25.4×35	0.15	2.75	ESMM181VSN821MQ35S		390	22×30	0.15	1.89	ESMM221VSN391MP30S	
	820	30×25	0.15	2.69	ESMM181VSN821MR25S		390	25.4×25	0.15	1.84	ESMM221VSN391MQ25S	
	1,000	22×50	0.15	3.10	ESMM181VSN102MP50S		390	30×20	0.15	1.71	ESMM221VSN391MR20S	
	1,000	25.4×40	0.15	3.06	ESMM181VSN102MQ40S		470	20×40	0.15	2.12	ESMM221VSN471MN40S	
	1,000	30×30	0.15	3.10	ESMM181VSN102MR30S		470	22×35	0.15	2.08	ESMM221VSN471MP35S	
	1,000	35×25	0.15	2.98	ESMM181VSN102MA25S		470	25.4×30	0.15	2.08	ESMM221VSN471MQ30S	

◆STANDARD RATINGS


WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
220	470	30×25	0.15	2.12	ESMM221VSN471MR25S	315	180	22×30	0.15	1.29	ESMM3B1VSN181MP30S
	470	35×20	0.15	1.88	ESMM221VSN471MA20S		180	25.4×25	0.15	1.38	ESMM3B1VSN181MQ25S
	560	20×50	0.15	2.33	ESMM221VSN561MN50S		180	30×20	0.15	1.16	ESMM3B1VSN181MR20S
	560	22×40	0.15	2.33	ESMM221VSN561MP40S		220	20×35	0.15	1.30	ESMM3B1VSN221MN35S
	560	25.4×35	0.15	2.38	ESMM221VSN561MQ35S		220	22×30	0.15	1.41	ESMM3B1VSN221MP30S
	560	30×25	0.15	2.31	ESMM221VSN561MR25S		220	25.4×25	0.15	1.47	ESMM3B1VSN221MQ25S
	560	35×20	0.15	2.14	ESMM221VSN561MA20S		220	30×20	0.15	1.28	ESMM3B1VSN221MR20S
	680	22×45	0.15	2.63	ESMM221VSN681MP45S		270	20×45	0.15	1.52	ESMM3B1VSN271MN45S
	680	25.4×35	0.15	2.68	ESMM221VSN681MQ35S		270	22×35	0.15	1.68	ESMM3B1VSN271MP35S
	680	30×30	0.15	2.62	ESMM221VSN681MR30S		270	25.4×30	0.15	1.70	ESMM3B1VSN271MQ30S
	680	35×25	0.15	2.58	ESMM221VSN681MA25S		270	30×25	0.15	1.55	ESMM3B1VSN271MR25S
	820	25.4×45	0.15	3.01	ESMM221VSN821MQ45S		270	35×20	0.15	1.43	ESMM3B1VSN271MA20S
	820	30×35	0.15	2.99	ESMM221VSN821MR35S		330	20×50	0.15	1.73	ESMM3B1VSN331MP30S
	820	35×30	0.15	2.79	ESMM221VSN821MA30S		330	22×40	0.15	1.91	ESMM3B1VSN331MP40S
	1,000	25.4×50	0.15	3.40	ESMM221VSN102MQ50S		330	25.4×35	0.15	1.94	ESMM3B1VSN331MQ35S
	1,000	30×35	0.15	3.42	ESMM221VSN102MR35S		330	30×25	0.15	1.98	ESMM3B1VSN331MR25S
	1,000	35×30	0.15	3.29	ESMM221VSN102MA30S		390	22×45	0.15	2.07	ESMM3B1VSN391MP45S
	1,200	30×40	0.15	3.88	ESMM221VSN122MR40S		390	25.4×40	0.15	2.11	ESMM3B1VSN391MQ40S
	1,200	35×35	0.15	3.68	ESMM221VSN122MA35S		390	30×30	0.15	2.15	ESMM3B1VSN391MR30S
	1,500	30×50	0.15	4.44	ESMM221VSN152MR50S		390	35×25	0.15	1.95	ESMM3B1VSN391MA25S
1,500	35×40	0.15	4.10	ESMM221VSN152MA40S	470	25.4×45	0.15	2.31	ESMM3B1VSN471MQ45S		
1,800	35×45	0.15	4.52	ESMM221VSN182MA45S	470	30×35	0.15	2.38	ESMM3B1VSN471MR35S		
250	150	22×20	0.15	0.97	ESMM251VSN151MP20S	470	35×30	0.15	2.46	ESMM3B1VSN471MA30S	
	180	20×25	0.15	1.20	ESMM251VSN181MN25S	560	25.4×50	0.15	2.46	ESMM3B1VSN561MQ50S	
	180	22×20	0.15	1.06	ESMM251VSN181MP20S	560	30×35	0.15	2.63	ESMM3B1VSN561MR35S	
	220	20×25	0.15	1.26	ESMM251VSN221MN25S	560	35×30	0.15	2.69	ESMM3B1VSN561MA30S	
	220	22×25	0.15	1.24	ESMM251VSN221MP25S	680	30×45	0.15	2.82	ESMM3B1VSN681MR45S	
	220	25.4×20	0.15	1.22	ESMM251VSN221MQ20S	680	35×35	0.15	3.05	ESMM3B1VSN681MA35S	
	270	20×30	0.15	1.42	ESMM251VSN271MN30S	820	30×50	0.15	3.28	ESMM3B1VSN821MR50S	
	270	22×25	0.15	1.50	ESMM251VSN271MP25S	820	35×40	0.15	3.45	ESMM3B1VSN821MA40S	
	330	20×35	0.15	1.68	ESMM251VSN331MN35S	1,000	35×45	0.15	3.59	ESMM3B1VSN102MA45S	
	330	22×30	0.15	1.66	ESMM251VSN331MP30S	350	82	22×20	0.15	0.72	ESMM351VSN820MP20S
	330	25.4×25	0.15	1.61	ESMM251VSN331MQ25S		100	20×25	0.15	0.81	ESMM351VSN101MN25S
	330	30×20	0.15	1.58	ESMM251VSN331MR20S		120	20×30	0.15	0.96	ESMM351VSN121MN30S
	390	20×40	0.15	1.92	ESMM251VSN391MN40S		120	22×25	0.15	1.04	ESMM351VSN121MP25S
	390	22×35	0.15	1.88	ESMM251VSN391MP35S		120	25.4×20	0.15	0.90	ESMM351VSN121MQ20S
	390	25.4×30	0.15	1.88	ESMM251VSN391MQ30S		150	20×30	0.15	1.10	ESMM351VSN151MN30S
	390	30×25	0.15	1.86	ESMM251VSN391MR25S		150	22×30	0.15	1.20	ESMM351VSN151MP30S
	390	35×20	0.15	1.71	ESMM251VSN391MA20S		150	25.4×25	0.15	1.22	ESMM351VSN151MQ25S
	470	20×50	0.15	2.06	ESMM251VSN471MN50S		150	30×20	0.15	1.06	ESMM351VSN151MR20S
	470	22×35	0.15	2.15	ESMM251VSN471MP35S		180	20×35	0.15	1.24	ESMM351VSN181MN35S
	470	25.4×35	0.15	2.15	ESMM251VSN471MQ35S		180	22×30	0.15	1.34	ESMM351VSN181MP30S
	470	30×25	0.15	2.05	ESMM251VSN471MR25S		180	25.4×25	0.15	1.37	ESMM351VSN181MQ25S
	470	35×20	0.15	1.88	ESMM251VSN471MA20S		180	30×20	0.15	1.16	ESMM351VSN181MR20S
	560	22×40	0.15	2.48	ESMM251VSN561MP40S		220	20×45	0.15	1.37	ESMM351VSN221MN45S
	560	25.4×35	0.15	2.35	ESMM251VSN561MQ35S		220	22×35	0.15	1.47	ESMM351VSN221MP35S
	560	30×25	0.15	2.35	ESMM251VSN561MR25S		220	25.4×30	0.15	1.53	ESMM351VSN221MQ30S
	680	22×50	0.15	2.61	ESMM251VSN681MP50S		220	30×25	0.15	1.54	ESMM351VSN221MR25S
	680	25.4×40	0.15	2.67	ESMM251VSN681MQ40S		220	35×20	0.15	1.29	ESMM351VSN221MA20S
	680	30×30	0.15	2.71	ESMM251VSN681MR30S		270	20×50	0.15	1.56	ESMM351VSN271MN50S
	680	35×25	0.15	2.58	ESMM251VSN681MA25S		270	22×40	0.15	1.70	ESMM351VSN271MP40S
	820	25.4×45	0.15	3.01	ESMM251VSN821MQ45S	270	25.4×35	0.15	1.73	ESMM351VSN271MQ35S	
820	30×35	0.15	2.98	ESMM251VSN821MR35S	270	30×25	0.15	1.80	ESMM351VSN271MA25S		
820	35×30	0.15	2.96	ESMM251VSN821MA30S	270	35×20	0.15	1.49	ESMM351VSN271MA20S		
1,000	30×40	0.15	3.56	ESMM251VSN102MR40S	330	22×45	0.15	1.87	ESMM351VSN331MP45S		
1,000	35×35	0.15	3.48	ESMM251VSN102MA35S	330	25.4×35	0.15	1.97	ESMM351VSN331MQ35S		
1,200	30×45	0.15	3.99	ESMM251VSN122MR45S	330	30×30	0.15	2.03	ESMM351VSN331MR30S		
1,200	35×35	0.15	3.84	ESMM251VSN122MA35S	330	35×25	0.15	1.80	ESMM351VSN331MA25S		
1,500	35×40	0.15	4.33	ESMM251VSN152MA40S	390	25.4×40	0.15	2.14	ESMM351VSN391MQ40S		
1,800	35×50	0.15	4.54	ESMM251VSN182MA50S	390	30×35	0.15	2.23	ESMM351VSN391MR35S		
315	100	22×20	0.15	0.79	ESMM3B1VSN101MP20S	390	35×30	0.15	2.30	ESMM351VSN391MA30S	
	120	20×25	0.15	0.89	ESMM3B1VSN121MN25S	470	25.4×50	0.15	2.55	ESMM351VSN471MQ50S	
	120	25.4×20	0.15	0.90	ESMM3B1VSN121MQ20S	470	30×35	0.15	2.53	ESMM351VSN471MR35S	
	150	20×30	0.15	1.05	ESMM3B1VSN151MN30S	470	35×30	0.15	2.55	ESMM351VSN471MA30S	
	150	22×25	0.15	1.06	ESMM3B1VSN151MP25S	560	30×40	0.15	2.73	ESMM351VSN561MR40S	
	150	25.4×20	0.15	1.00	ESMM3B1VSN151MQ20S	560	35×35	0.15	2.75	ESMM351VSN561MA35S	
	180	20×35	0.15	1.18	ESMM3B1VSN181MN35S	680	30×50	0.15	3.15	ESMM351VSN681MR50S	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
350	680	35×40	0.15	3.15	ESMM351VSN681MA40S	420	180	20×50	0.20	1.27	ESMM421VSN181MN50S
	820	35×45	0.15	3.47	ESMM351VSN821MA45S		180	22×40	0.20	1.33	ESMM421VSN181MP40S
	1,000	35×50	0.15	3.60	ESMM351VSN102MA50S		180	25.4×35	0.20	1.42	ESMM421VSN181MQ35S
400	68	20×25	0.15	0.75	ESMM401VSN680MN25S		180	30×25	0.20	1.48	ESMM421VSN181MR25S
	68	22×20	0.15	0.65	ESMM401VSN680MP20S		180	35×20	0.20	1.16	ESMM421VSN181MA20S
	82	20×25	0.15	0.82	ESMM401VSN820MN25S		220	22×45	0.20	1.55	ESMM421VSN221MP45S
	82	22×25	0.15	0.84	ESMM401VSN820MP25S		220	25.4×35	0.20	1.58	ESMM421VSN221MQ35S
	82	25.4×20	0.15	0.74	ESMM401VSN820MQ20S		220	30×30	0.20	1.65	ESMM421VSN221MR30S
	100	20×30	0.15	0.95	ESMM401VSN101MP30S		220	35×25	0.20	1.47	ESMM421VSN221MA25S
	100	22×25	0.15	0.99	ESMM401VSN101MP25S		270	25.4×40	0.20	1.74	ESMM421VSN271MQ40S
	100	25.4×20	0.15	0.82	ESMM401VSN101MQ20S		270	30×35	0.20	1.90	ESMM421VSN271MR35S
	120	20×35	0.15	1.07	ESMM401VSN121MN35S		270	35×30	0.20	1.94	ESMM421VSN271MA30S
	120	22×30	0.15	1.09	ESMM401VSN121MP30S		330	25.4×50	0.20	2.20	ESMM421VSN331MQ50S
	120	25.4×25	0.15	1.13	ESMM401VSN121MQ25S		330	30×35	0.20	1.98	ESMM421VSN331MR35S
	120	30×20	0.15	0.95	ESMM401VSN121MR20S		330	35×35	0.20	2.17	ESMM421VSN331MA35S
	150	20×40	0.15	1.22	ESMM401VSN151MN40S		390	30×40	0.20	2.22	ESMM421VSN391MR40S
	150	22×35	0.15	1.24	ESMM401VSN151MP35S		390	35×35	0.20	2.27	ESMM421VSN391MA35S
	150	25.4×30	0.15	1.27	ESMM401VSN151MQ30S		470	30×45	0.20	2.50	ESMM421VSN471MR45S
	150	30×25	0.15	1.20	ESMM401VSN151MR25S		470	35×40	0.20	2.61	ESMM421VSN471MA40S
	180	20×45	0.15	1.28	ESMM401VSN181MN45S		560	35×45	0.20	2.95	ESMM421VSN561MA45S
	180	22×40	0.15	1.41	ESMM401VSN181MP40S	680	35×50	0.20	3.15	ESMM421VSN681MA50S	
	180	25.4×30	0.15	1.44	ESMM401VSN181MQ30S	450	47	22×20	0.20	0.54	ESMM451VSN470MP20S
	180	30×25	0.15	1.52	ESMM401VSN181MR25S		56	20×25	0.20	0.61	ESMM451VSN560MN25S
	180	35×20	0.15	1.16	ESMM401VSN181MA20S		56	22×20	0.20	0.59	ESMM451VSN560MP20S
	220	20×50	0.15	1.41	ESMM401VSN221MN50S		68	20×30	0.20	0.71	ESMM451VSN680MN30S
	220	22×45	0.15	1.58	ESMM401VSN221MP45S		68	22×25	0.20	0.71	ESMM451VSN680MP25S
	220	25.4×35	0.15	1.64	ESMM401VSN221MQ35S		68	25.4×20	0.20	0.68	ESMM451VSN680MQ20S
	220	30×30	0.15	1.66	ESMM401VSN221MR30S		82	20×35	0.20	0.80	ESMM451VSN820MN35S
	220	35×25	0.15	1.47	ESMM401VSN221MA25S		82	22×25	0.20	0.86	ESMM451VSN820MP25S
	270	22×50	0.15	1.65	ESMM401VSN271MP50S		82	25.4×20	0.20	0.74	ESMM451VSN820MQ20S
	270	25.4×40	0.15	1.79	ESMM401VSN271MQ40S		82	30×20	0.20	0.79	ESMM451VSN820MR20S
	270	30×30	0.15	1.82	ESMM401VSN271MR30S		100	20×35	0.20	0.88	ESMM451VSN101MN35S
	270	35×25	0.15	1.63	ESMM401VSN271MA25S		100	22×30	0.20	0.95	ESMM451VSN101MP30S
330	25.4×45	0.15	2.00	ESMM401VSN331MQ45S	100		25.4×25	0.20	0.97	ESMM451VSN101MQ25S	
330	30×35	0.15	2.05	ESMM401VSN331MR35S	100		30×20	0.20	0.87	ESMM451VSN101MR20S	
330	35×30	0.15	2.05	ESMM401VSN331MA30S	120		20×40	0.20	0.99	ESMM451VSN121MN40S	
390	25.4×50	0.15	2.12	ESMM401VSN391MQ50S	120		22×35	0.20	1.07	ESMM451VSN121MP35S	
390	30×40	0.15	2.26	ESMM401VSN391MR40S	120		25.4×30	0.20	1.09	ESMM451VSN121MQ30S	
390	35×35	0.15	2.28	ESMM401VSN391MA35S	120		30×25	0.20	1.12	ESMM451VSN121MR25S	
470	30×45	0.15	2.51	ESMM401VSN471MR45S	120		35×20	0.20	0.99	ESMM451VSN121MA20S	
470	35×35	0.15	2.54	ESMM401VSN471MA35S	150		20×45	0.20	1.13	ESMM451VSN151MN45S	
560	30×50	0.15	2.85	ESMM401VSN561MR50S	150	22×40	0.20	1.18	ESMM451VSN151MP40S		
560	35×40	0.15	2.85	ESMM401VSN561MA40S	150	25.4×30	0.20	1.25	ESMM451VSN151MQ30S		
680	35×50	0.15	3.10	ESMM401VSN681MA50S	150	30×25	0.20	1.29	ESMM451VSN151MR25S		
420	47	22×20	0.20	0.54	ESMM421VSN470MP20S	150	35×20	0.20	1.06	ESMM451VSN151MA20S	
	56	20×25	0.20	0.58	ESMM421VSN560MN25S	180	22×45	0.20	1.32	ESMM451VSN181MP45S	
	56	22×20	0.20	0.59	ESMM421VSN560MP20S	180	25.4×35	0.20	1.40	ESMM451VSN181MQ35S	
	68	20×25	0.20	0.70	ESMM421VSN680MN25S	180	30×30	0.20	1.45	ESMM451VSN181MR30S	
	68	25.4×20	0.20	0.68	ESMM421VSN680MQ20S	180	35×25	0.20	1.33	ESMM451VSN181MA25S	
	82	20×30	0.20	0.80	ESMM421VSN820MN30S	220	22×50	0.20	1.48	ESMM451VSN221MP50S	
	82	22×25	0.20	0.85	ESMM421VSN820MP25S	220	25.4×40	0.20	1.59	ESMM451VSN221MQ40S	
	82	25.4×20	0.20	0.74	ESMM421VSN820MQ20S	220	30×30	0.20	1.64	ESMM451VSN221MR30S	
	100	20×35	0.20	0.90	ESMM421VSN101MN35S	220	35×25	0.20	1.66	ESMM451VSN221MA25S	
	100	22×30	0.20	0.97	ESMM421VSN101MP30S	270	25.4×45	0.20	1.73	ESMM451VSN271MQ45S	
	100	25.4×25	0.20	0.98	ESMM421VSN101MQ25S	270	30×35	0.20	1.89	ESMM451VSN271MR35S	
	100	30×20	0.20	0.87	ESMM421VSN101MR20S	270	35×30	0.20	1.90	ESMM451VSN271MA30S	
	120	20×35	0.20	1.04	ESMM421VSN121MN35S	330	25.4×50	0.20	2.12	ESMM451VSN331MQ50S	
	120	22×30	0.20	1.07	ESMM421VSN121MP30S	330	30×40	0.20	2.12	ESMM451VSN331MR40S	
	120	25.4×25	0.20	1.08	ESMM421VSN121MQ25S	330	35×35	0.20	2.15	ESMM451VSN331MA35S	
	120	30×20	0.20	0.95	ESMM421VSN121MR20S	390	30×45	0.20	2.35	ESMM451VSN391MR45S	
	150	20×40	0.20	1.17	ESMM421VSN151MN40S	390	35×40	0.20	2.38	ESMM451VSN391MA40S	
	150	22×35	0.20	1.21	ESMM421VSN151MP35S	470	30×50	0.20	2.65	ESMM451VSN471MR50S	
	150	25.4×30	0.20	1.26	ESMM421VSN151MQ30S	470	35×45	0.20	2.68	ESMM451VSN471MA45S	
	150	30×25	0.20	1.30	ESMM421VSN151MR25S	560	35×50	0.20	2.88	ESMM451VSN561MA50S	
150	35×20	0.20	1.11	ESMM421VSN151MA20S							

KMM Series

- Downsize, longer life, and high ripple version of KMH series
- Endurance with ripple current : 2,000 to 3,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS


Items	Characteristics		
Category	-25 to +105°C		
Temperature Range	-25 to +105°C		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours (2,000 hours for φ20×20L products) at 105°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

DIMENSIONS [mm]

- Terminal Code : VS (φ20 to φ35) : Standard

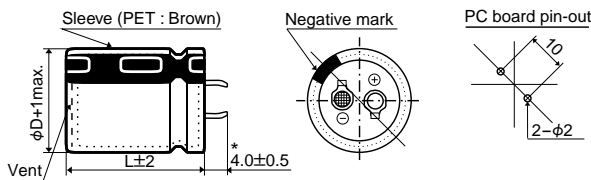


- Terminal Code : LI (φ35)

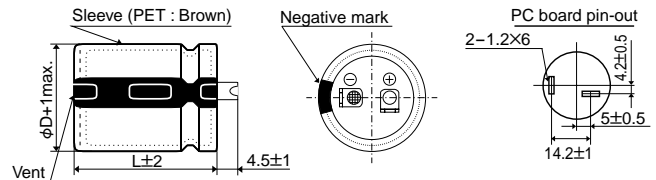

*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

PART NUMBERING SYSTEM

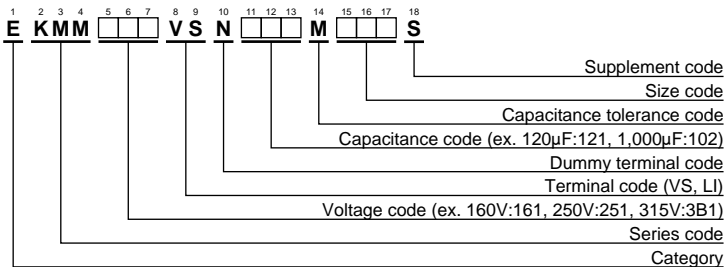

Please refer to "A guide to global code (snap-in type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	180	20×20	0.15	0.68	EKMM161VSN181MN20S	180	560	20×45	0.15	1.55	EKMM181VSN561MN45S
	220	20×25	0.15	0.85	EKMM161VSN221MN25S		560	22×40	0.15	1.67	EKMM181VSN561MP40S
	220	22×20	0.15	0.81	EKMM161VSN221MP20S		560	25.4×30	0.15	1.67	EKMM181VSN561MQ30S
	270	20×25	0.15	1.10	EKMM161VSN271MN25S		560	30×25	0.15	1.67	EKMM181VSN561MR25S
	270	25.4×20	0.15	0.98	EKMM161VSN271MQ20S		560	35×20	0.15	1.43	EKMM181VSN561MA20S
	330	20×30	0.15	1.20	EKMM161VSN331MN30S		680	20×50	0.15	1.75	EKMM181VSN681MN50S
	330	22×25	0.15	1.20	EKMM161VSN331MP25S		680	22×45	0.15	1.78	EKMM181VSN681MP45S
	330	25.4×20	0.15	1.02	EKMM161VSN331MQ20S		680	25.4×35	0.15	1.78	EKMM181VSN681MQ35S
	390	20×30	0.15	1.30	EKMM161VSN391MN30S		680	30×30	0.15	1.78	EKMM181VSN681MR30S
	390	22×25	0.15	1.30	EKMM161VSN391MP25S		680	35×25	0.15	1.83	EKMM181VSN681MA25S
	390	25.4×25	0.15	1.26	EKMM161VSN391MQ25S		820	22×50	0.15	2.04	EKMM181VSN821MP50S
	390	30×20	0.15	1.25	EKMM161VSN391MR20S		820	25.4×40	0.15	2.04	EKMM181VSN821MQ40S
	470	20×35	0.15	1.34	EKMM161VSN471MN35S		820	30×30	0.15	2.04	EKMM181VSN821MR30S
	470	22×30	0.15	1.55	EKMM161VSN471MP30S		820	35×25	0.15	2.04	EKMM181VSN821MA25S
	470	25.4×25	0.15	1.55	EKMM161VSN471MQ25S		1,000	25.4×45	0.15	2.30	EKMM181VSN102MQ45S
	470	30×20	0.15	1.30	EKMM161VSN471MR20S		1,000	30×35	0.15	2.30	EKMM181VSN102MR35S
	560	20×40	0.15	1.50	EKMM161VSN561MN40S		1,000	35×30	0.15	2.30	EKMM181VSN102MA30S
	560	22×35	0.15	1.67	EKMM161VSN561MP35S		1,200	25.4×50	0.15	2.55	EKMM181VSN122MQ50S
	560	25.4×30	0.15	1.67	EKMM161VSN561MQ30S		1,200	30×40	0.15	2.55	EKMM181VSN122MR40S
	560	30×25	0.15	1.67	EKMM161VSN561MR25S		1,200	35×30	0.15	2.55	EKMM181VSN122MA30S
	560	35×20	0.15	1.46	EKMM161VSN561MA20S		1,500	30×45	0.15	2.90	EKMM181VSN152MR45S
	680	20×45	0.15	1.70	EKMM161VSN681MN45S		1,500	35×35	0.15	2.90	EKMM181VSN152MA35S
	680	22×40	0.15	1.82	EKMM161VSN681MP40S		1,800	30×60	0.15	3.49	EKMM181VSN182MR60S
	680	25.4×30	0.15	1.82	EKMM161VSN681MQ30S		1,800	35×40	0.15	3.30	EKMM181VSN182MA40S
	680	30×25	0.15	1.82	EKMM161VSN681MR25S		2,200	35×50	0.15	3.65	EKMM181VSN222MA50S
	680	35×20	0.15	1.51	EKMM161VSN681MA20S		2,700	35×60	0.15	4.19	EKMM181VSN272MA60S
	820	22×45	0.15	2.04	EKMM161VSN821MP45S		120	20×20	0.15	0.56	EKMM201VSN121MN20S
	820	25.4×35	0.15	2.04	EKMM161VSN821MQ35S		150	20×25	0.15	0.71	EKMM201VSN151MN25S
	820	30×30	0.15	2.04	EKMM161VSN821MR30S		150	22×20	0.15	0.73	EKMM201VSN151MP20S
	820	35×25	0.15	2.04	EKMM161VSN821MA25S		180	20×25	0.15	0.77	EKMM201VSN181MN25S
	1,000	22×50	0.15	2.25	EKMM161VSN102MP50S		180	22×20	0.15	0.80	EKMM201VSN181MP20S
	1,000	25.4×40	0.15	2.25	EKMM161VSN102MQ40S		220	20×25	0.15	1.00	EKMM201VSN221MN25S
	1,000	30×30	0.15	2.25	EKMM161VSN102MR30S		220	25.4×20	0.15	0.85	EKMM201VSN221MQ20S
	1,000	35×25	0.15	2.25	EKMM161VSN102MA25S		270	20×30	0.15	1.10	EKMM201VSN271MN30S
	1,200	25.4×45	0.15	2.49	EKMM161VSN122MQ45S		270	22×25	0.15	1.10	EKMM201VSN271MP25S
	1,200	30×35	0.15	2.49	EKMM161VSN122MR35S		270	30×20	0.15	1.05	EKMM201VSN271MR20S
	1,200	35×30	0.15	2.49	EKMM161VSN122MA30S		330	20×35	0.15	1.20	EKMM201VSN331MN35S
	1,500	25.4×60	0.15	2.97	EKMM161VSN152MQ60S		330	22×30	0.15	1.25	EKMM201VSN331MP30S
	1,500	30×40	0.15	2.84	EKMM161VSN152MR40S		330	25.4×25	0.15	1.25	EKMM201VSN331MQ25S
	1,500	35×30	0.15	2.84	EKMM161VSN152MA30S		330	30×20	0.15	1.10	EKMM201VSN331MR20S
1,800	30×45	0.15	3.32	EKMM161VSN182MR45S	390	20×40	0.15	1.31	EKMM201VSN391MN40S		
1,800	35×35	0.15	3.00	EKMM161VSN182MA35S	390	22×30	0.15	1.35	EKMM201VSN391MP30S		
2,200	30×60	0.15	3.86	EKMM161VSN222MR60S	390	25.4×25	0.15	1.35	EKMM201VSN391MQ25S		
2,200	35×45	0.15	3.50	EKMM161VSN222MA45S	390	35×20	0.15	1.30	EKMM201VSN391MA20S		
2,700	35×50	0.15	4.00	EKMM161VSN272MA50S	470	20×45	0.15	1.45	EKMM201VSN471MN45S		
3,300	35×60	0.15	4.63	EKMM161VSN332MA60S	470	22×35	0.15	1.50	EKMM201VSN471MP35S		
180	150	20×20	0.15	0.62	EKMM181VSN151MN20S	470	25.4×30	0.15	1.50	EKMM201VSN471MQ30S	
	180	20×25	0.15	0.77	EKMM181VSN181MN25S	470	30×25	0.15	1.50	EKMM201VSN471MR25S	
	180	22×20	0.15	0.80	EKMM181VSN181MP20S	470	35×20	0.15	1.41	EKMM201VSN471MA20S	
	220	20×25	0.15	1.00	EKMM181VSN221MN25S	560	20×50	0.15	1.58	EKMM201VSN561MN50S	
	220	25.4×20	0.15	0.90	EKMM181VSN221MQ20S	560	22×40	0.15	1.67	EKMM201VSN561MP40S	
	270	20×30	0.15	1.10	EKMM181VSN271MN30S	560	25.4×30	0.15	1.67	EKMM201VSN561MQ30S	
	270	22×25	0.15	1.00	EKMM181VSN271MP25S	560	30×25	0.15	1.67	EKMM201VSN561MR25S	
	270	25.4×20	0.15	0.95	EKMM181VSN271MQ20S	680	22×45	0.15	1.78	EKMM201VSN681MP45S	
	330	20×30	0.15	1.20	EKMM181VSN331MN30S	680	25.4×35	0.15	1.78	EKMM201VSN681MQ35S	
	330	22×25	0.15	1.20	EKMM181VSN331MP25S	680	30×30	0.15	1.78	EKMM201VSN681MR30S	
	330	25.4×25	0.15	1.16	EKMM181VSN331MQ25S	680	35×25	0.15	1.78	EKMM201VSN681MA25S	
	330	30×20	0.15	1.15	EKMM181VSN331MR20S	820	25.4×45	0.15	2.04	EKMM201VSN821MQ45S	
	390	20×35	0.15	1.30	EKMM181VSN391MN35S	820	30×30	0.15	2.04	EKMM201VSN821MR30S	
	390	22×30	0.15	1.35	EKMM181VSN391MP30S	820	35×25	0.15	2.04	EKMM201VSN821MA25S	
	390	25.4×25	0.15	1.35	EKMM181VSN391MQ25S	1,000	25.4×50	0.15	2.30	EKMM201VSN102MQ50S	
	390	30×20	0.15	1.20	EKMM181VSN391MR20S	1,000	30×35	0.15	2.30	EKMM201VSN102MR35S	
	470	20×40	0.15	1.40	EKMM181VSN471MN40S	1,000	35×30	0.15	2.30	EKMM201VSN102MA30S	
	470	22×35	0.15	1.50	EKMM181VSN471MP35S	1,200	25.4×60	0.15	2.66	EKMM201VSN122MQ60S	
	470	25.4×30	0.15	1.50	EKMM181VSN471MQ30S	1,200	30×40	0.15	2.65	EKMM201VSN122MR40S	
	470	30×25	0.15	1.50	EKMM181VSN471MR25S	1,200	35×35	0.15	2.65	EKMM201VSN122MA35S	
	470	35×20	0.15	1.36	EKMM181VSN471MA20S	1,500	30×50	0.15	3.08	EKMM201VSN152MR50S	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	
200	1,500	35×40	0.15	3.08	EKMM201VSN152MA40S	250	330	30×25	0.15	1.30	EKMM251VSN331MR25S	
	1,800	30×60	0.15	3.49	EKMM201VSN182MR60S		330	35×20	0.15	1.16	EKMM251VSN331MA20S	
	1,800	35×45	0.15	3.48	EKMM201VSN182MA45S		390	20×50	0.15	1.45	EKMM251VSN391MN50S	
	2,200	35×50	0.15	3.78	EKMM201VSN222MA50S		390	22×40	0.15	1.49	EKMM251VSN391MP40S	
220	120	20×20	0.15	0.56	EKMM221VSN121MN20S		390	25.4×35	0.15	1.49	EKMM251VSN391MQ35S	
	150	20×25	0.15	0.73	EKMM221VSN151MN25S		390	30×25	0.15	1.49	EKMM251VSN391MR25S	
	150	22×20	0.15	0.67	EKMM221VSN151MP20S		470	22×45	0.15	1.65	EKMM251VSN471MP45S	
	180	20×25	0.15	0.90	EKMM221VSN181MN25S		470	25.4×35	0.15	1.65	EKMM251VSN471MQ35S	
	180	25.4×20	0.15	0.76	EKMM221VSN181MQ20S		470	30×30	0.15	1.65	EKMM251VSN471MR30S	
	220	20×30	0.15	1.00	EKMM221VSN221MN30S		470	35×25	0.15	1.65	EKMM251VSN471MA25S	
	220	22×25	0.15	1.00	EKMM221VSN221MP25S		560	22×50	0.15	1.67	EKMM251VSN561MP50S	
	220	25.4×20	0.15	0.84	EKMM221VSN221MQ20S		560	25.4×40	0.15	1.80	EKMM251VSN561MQ40S	
	270	20×35	0.15	1.15	EKMM221VSN271MN35S		560	30×30	0.15	1.80	EKMM251VSN561MR30S	
	270	22×30	0.15	1.15	EKMM221VSN271MP30S		560	35×25	0.15	1.80	EKMM251VSN561MA25S	
	270	25.4×25	0.15	1.08	EKMM221VSN271MQ25S		680	25.4×50	0.15	2.00	EKMM251VSN681MQ50S	
	270	30×20	0.15	0.98	EKMM221VSN271MR20S		680	30×35	0.15	2.00	EKMM251VSN681MR35S	
	330	20×40	0.15	1.25	EKMM221VSN331MN40S		680	35×30	0.15	2.00	EKMM251VSN681MA30S	
	330	22×35	0.15	1.25	EKMM221VSN331MP35S		820	25.4×60	0.15	2.20	EKMM251VSN821MQ60S	
	330	25.4×25	0.15	1.25	EKMM221VSN331MQ25S		820	30×40	0.15	2.30	EKMM251VSN821MR40S	
	330	35×20	0.15	1.13	EKMM221VSN331MA20S		820	35×35	0.15	2.30	EKMM251VSN821MA35S	
	390	20×45	0.15	1.40	EKMM221VSN391MN45S		1,000	30×50	0.15	2.47	EKMM251VSN102MR50S	
	390	22×35	0.15	1.40	EKMM221VSN391MP35S		1,000	35×40	0.15	2.47	EKMM251VSN102MA40S	
	390	25.4×30	0.15	1.40	EKMM221VSN391MQ30S		1,200	30×60	0.15	2.85	EKMM251VSN122MR60S	
	390	30×25	0.15	1.36	EKMM221VSN391MR25S		1,200	35×45	0.15	2.60	EKMM251VSN122MA45S	
	390	35×20	0.15	1.23	EKMM221VSN391MA20S		1,500	35×50	0.15	3.00	EKMM251VSN152MA50S	
	470	20×50	0.15	1.51	EKMM221VSN471MP50S		1,800	35×60	0.15	3.42	EKMM251VSN182MA60S	
	470	22×40	0.15	1.51	EKMM221VSN471MP40S		315	56	20×20	0.15	0.38	EKMM3B1VSN560MN20S
	470	25.4×35	0.15	1.54	EKMM221VSN471MQ35S			68	20×25	0.15	0.47	EKMM3B1VSN680MN25S
	470	30×25	0.15	1.50	EKMM221VSN471MR25S			68	22×20	0.15	0.45	EKMM3B1VSN680MP20S
	560	22×45	0.15	1.70	EKMM221VSN561MP45S			82	20×25	0.15	0.64	EKMM3B1VSN820MN25S
	560	25.4×40	0.15	1.72	EKMM221VSN561MQ40S			82	22×20	0.15	0.47	EKMM3B1VSN820MP20S
	560	30×30	0.15	1.70	EKMM221VSN561MR30S			100	20×30	0.15	0.69	EKMM3B1VSN101MN30S
	560	35×25	0.15	1.71	EKMM221VSN561MA25S			100	22×25	0.15	0.61	EKMM3B1VSN101MP25S
	680	25.4×45	0.15	1.94	EKMM221VSN681MQ45S			100	25.4×20	0.15	0.56	EKMM3B1VSN101MQ20S
	680	30×35	0.15	1.93	EKMM221VSN681MR35S			120	20×30	0.15	0.75	EKMM3B1VSN121MN30S
	680	35×25	0.15	1.89	EKMM221VSN681MA25S			120	22×25	0.15	0.75	EKMM3B1VSN121MP25S
	820	25.4×50	0.15	2.18	EKMM221VSN821MQ50S			120	25.4×20	0.15	0.62	EKMM3B1VSN121MQ20S
	820	30×40	0.15	2.19	EKMM221VSN821MR40S			120	30×20	0.15	0.65	EKMM3B1VSN121MR20S
	820	35×30	0.15	2.16	EKMM221VSN821MA30S			150	20×35	0.15	0.82	EKMM3B1VSN151MN35S
	1,000	25.4×60	0.15	2.54	EKMM221VSN102MQ60S			150	22×30	0.15	0.82	EKMM3B1VSN151MP30S
	1,000	30×45	0.15	2.50	EKMM221VSN102MR45S			150	25.4×25	0.15	0.82	EKMM3B1VSN151MQ25S
	1,000	35×35	0.15	2.44	EKMM221VSN102MA35S			150	30×20	0.15	0.70	EKMM3B1VSN151MR20S
	1,200	30×50	0.15	2.81	EKMM221VSN122MR50S			150	35×20	0.15	0.76	EKMM3B1VSN151MA20S
	1,200	35×40	0.15	2.79	EKMM221VSN122MA40S			180	20×40	0.15	0.90	EKMM3B1VSN181MN40S
	1,500	30×60	0.15	3.30	EKMM221VSN152MR60S			180	22×35	0.15	0.92	EKMM3B1VSN181MP35S
	1,500	35×45	0.15	3.22	EKMM221VSN152MA45S			180	25.4×25	0.15	0.92	EKMM3B1VSN181MQ25S
	1,800	35×50	0.15	3.63	EKMM221VSN182MA50S			180	30×25	0.15	0.90	EKMM3B1VSN181MR25S
	2,200	35×60	0.15	4.23	EKMM221VSN222MA60S			180	35×20	0.15	0.85	EKMM3B1VSN181MA20S
	250	100	20×20	0.15	0.51	EKMM251VSN101MN20S		220	20×50	0.15	1.00	EKMM3B1VSN221MN50S
		120	20×25	0.15	0.58	EKMM251VSN121MN25S		220	22×40	0.15	1.04	EKMM3B1VSN221MP40S
		120	22×20	0.15	0.60	EKMM251VSN121MP20S		220	25.4×30	0.15	1.04	EKMM3B1VSN221MQ30S
		150	20×25	0.15	0.79	EKMM251VSN151MN25S		220	30×25	0.15	1.04	EKMM3B1VSN221MR25S
150		25.4×20	0.15	0.74	EKMM251VSN151MQ20S	220		35×20	0.15	0.90	EKMM3B1VSN221MA20S	
180		20×30	0.15	0.90	EKMM251VSN181MN30S	270		22×45	0.15	1.16	EKMM3B1VSN271MP45S	
180		22×25	0.15	0.78	EKMM251VSN181MP25S	270		25.4×35	0.15	1.16	EKMM3B1VSN271MQ35S	
180		25.4×20	0.15	0.75	EKMM251VSN181MQ20S	270		30×25	0.15	1.16	EKMM3B1VSN271MR25S	
220		20×30	0.15	1.00	EKMM251VSN221MN30S	270		35×25	0.15	1.15	EKMM3B1VSN271MA25S	
220		22×25	0.15	1.00	EKMM251VSN221MP25S	330		22×50	0.15	1.33	EKMM3B1VSN331MP50S	
220		25.4×25	0.15	0.95	EKMM251VSN221MQ25S	330		25.4×40	0.15	1.33	EKMM3B1VSN331MQ40S	
220		30×20	0.15	0.95	EKMM251VSN221MR20S	330		30×30	0.15	1.33	EKMM3B1VSN331MR30S	
270		20×35	0.15	1.10	EKMM251VSN271MN35S	330		35×25	0.15	1.33	EKMM3B1VSN331MA25S	
270		22×30	0.15	1.18	EKMM251VSN271MP30S	390		25.4×45	0.15	1.47	EKMM3B1VSN391MQ45S	
270		25.4×25	0.15	1.18	EKMM251VSN271MQ25S	390		30×35	0.15	1.47	EKMM3B1VSN391MR35S	
270		30×20	0.15	1.00	EKMM251VSN271MR20S	390		35×30	0.15	1.47	EKMM3B1VSN391MA30S	
330		20×40	0.15	1.20	EKMM251VSN331MN40S	470		25.4×50	0.15	1.70	EKMM3B1VSN471MQ50S	
330		22×35	0.15	1.30	EKMM251VSN331MP35S	470		30×40	0.15	1.70	EKMM3B1VSN471MR40S	
330		25.4×30	0.15	1.30	EKMM251VSN331MQ30S	470		35×30	0.15	1.70	EKMM3B1VSN471MA30S	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
315	560	30×45	0.15	2.05	EKMM3B1VSN561MR45S	400	100	30×20	0.15	0.60	EKMM401VSN101MR20S
	560	35×35	0.15	2.05	EKMM3B1VSN561MA35S		120	20×40	0.15	0.75	EKMM401VSN121MN40S
	680	30×50	0.15	2.17	EKMM3B1VSN681MR50S		120	22×35	0.15	0.75	EKMM401VSN121MP35S
	680	35×40	0.15	2.17	EKMM3B1VSN681MA40S		120	25.4×25	0.15	0.75	EKMM401VSN121MQ25S
	820	35×45	0.15	2.20	EKMM3B1VSN821MA45S		120	30×25	0.15	0.73	EKMM401VSN121MR25S
	1,000	35×60	0.15	2.55	EKMM3B1VSN102MA60S		120	35×20	0.15	0.75	EKMM401VSN121MA20S
350	47	20×20	0.15	0.35	EKMM351VSN470MN20S		150	20×45	0.15	0.83	EKMM401VSN151MN45S
	56	20×25	0.15	0.43	EKMM351VSN560MN25S		150	22×40	0.15	0.88	EKMM401VSN151MP40S
	56	22×20	0.15	0.41	EKMM351VSN560MP20S		150	25.4×30	0.15	0.88	EKMM401VSN151MQ30S
	68	20×25	0.15	0.47	EKMM351VSN680MN25S		150	30×25	0.15	0.88	EKMM401VSN151MR25S
	68	25.4×20	0.15	0.46	EKMM351VSN680MQ20S		150	35×20	0.15	0.80	EKMM401VSN151MA20S
	82	20×30	0.15	0.54	EKMM351VSN820MN30S		180	22×45	0.15	0.98	EKMM401VSN181MP45S
	82	22×25	0.15	0.55	EKMM351VSN820MP25S		180	25.4×35	0.15	0.98	EKMM401VSN181MQ35S
	82	25.4×20	0.15	0.51	EKMM351VSN820MQ20S		180	30×30	0.15	0.98	EKMM401VSN181MR30S
	100	20×30	0.15	0.60	EKMM351VSN101MN30S		180	35×25	0.15	0.98	EKMM401VSN181MA25S
	100	22×25	0.15	0.69	EKMM351VSN101MP25S		220	22×50	0.15	1.10	EKMM401VSN221MP50S
	100	30×20	0.15	0.60	EKMM351VSN101MR20S		220	25.4×40	0.15	1.10	EKMM401VSN221MQ40S
	120	20×35	0.15	0.68	EKMM351VSN121MN35S		220	30×30	0.15	1.10	EKMM401VSN221MR30S
	120	22×30	0.15	0.75	EKMM351VSN121MP30S		220	35×25	0.15	1.10	EKMM401VSN221MA25S
	120	25.4×25	0.15	0.75	EKMM351VSN121MQ25S		270	25.4×45	0.15	1.22	EKMM401VSN271MQ45S
	120	30×20	0.15	0.65	EKMM351VSN121MR20S		270	30×35	0.15	1.22	EKMM401VSN271MR35S
	150	20×40	0.15	0.78	EKMM351VSN151MN40S		270	35×30	0.15	1.22	EKMM401VSN271MA30S
	150	22×35	0.15	0.82	EKMM351VSN151MP35S		330	25.4×50	0.15	1.44	EKMM401VSN331MQ50S
	150	25.4×30	0.15	0.83	EKMM351VSN151MQ30S		330	30×40	0.15	1.44	EKMM401VSN331MR40S
	150	30×25	0.15	0.82	EKMM351VSN151MR25S		330	35×30	0.15	1.44	EKMM401VSN331MA30S
	150	35×20	0.15	0.76	EKMM351VSN151MA20S		390	25.4×60	0.15	1.51	EKMM401VSN391MQ60S
	180	20×45	0.15	0.87	EKMM351VSN181MN45S		390	30×45	0.15	1.60	EKMM401VSN391MR45S
	180	22×40	0.15	0.92	EKMM351VSN181MP40S		390	35×35	0.15	1.60	EKMM401VSN391MA35S
	180	25.4×30	0.15	0.92	EKMM351VSN181MQ30S		470	30×50	0.15	1.90	EKMM401VSN471MR50S
	180	30×25	0.15	0.90	EKMM351VSN181MR25S		470	35×40	0.15	1.90	EKMM401VSN471MA40S
	220	20×50	0.15	1.00	EKMM351VSN221MN50S		560	30×60	0.15	2.10	EKMM401VSN561MR60S
	220	22×45	0.15	1.05	EKMM351VSN221MP45S		560	35×45	0.15	2.12	EKMM401VSN561MA45S
	220	25.4×35	0.15	1.04	EKMM351VSN221MQ35S		680	35×60	0.15	2.27	EKMM401VSN681MA60S
	220	30×30	0.15	1.02	EKMM351VSN221MR30S		39	20×20	0.20	0.32	EKMM401VSN390MN20S
	220	35×25	0.15	1.04	EKMM351VSN221MA25S		47	20×25	0.20	0.39	EKMM421VSN470MN25S
	270	22×50	0.15	1.16	EKMM351VSN271MP50S		47	22×20	0.20	0.37	EKMM421VSN470MP20S
	270	25.4×40	0.15	1.18	EKMM351VSN271MQ40S		56	20×25	0.20	0.51	EKMM421VSN560MN25S
	270	30×30	0.15	1.17	EKMM351VSN271MR30S		56	25.4×20	0.20	0.42	EKMM401VSN560MQ20S
	270	35×25	0.15	1.20	EKMM351VSN271MA25S		68	20×30	0.20	0.56	EKMM421VSN680MN30S
	330	25.4×45	0.15	1.29	EKMM351VSN331MQ45S		68	22×25	0.20	0.50	EKMM421VSN680MP25S
	330	30×35	0.15	1.34	EKMM351VSN331MR35S		68	25.4×20	0.20	0.46	EKMM421VSN680MQ20S
	330	35×30	0.15	1.22	EKMM351VSN331MA30S		82	20×35	0.20	0.64	EKMM401VSN820MN35S
	390	25.4×50	0.15	1.51	EKMM351VSN391MQ50S	82	22×25	0.20	0.64	EKMM421VSN820MP25S	
	390	30×40	0.15	1.51	EKMM351VSN391MR40S	82	25.4×25	0.20	0.58	EKMM421VSN820MQ25S	
	390	35×35	0.15	1.47	EKMM351VSN391MA35S	82	30×20	0.20	0.53	EKMM421VSN820MR20S	
	470	25.4×60	0.15	1.66	EKMM351VSN471MQ60S	100	20×35	0.20	0.70	EKMM421VSN901MN35S	
	470	30×45	0.15	1.65	EKMM351VSN471MR45S	100	22×30	0.20	0.70	EKMM421VSN101MP30S	
	470	35×35	0.15	1.69	EKMM351VSN471MA35S	100	25.4×25	0.20	0.70	EKMM421VSN101MQ25S	
560	30×50	0.15	1.85	EKMM351VSN561MR50S	100	30×20	0.20	0.59	EKMM421VSN101MR20S		
560	35×40	0.15	1.90	EKMM351VSN561MA40S	120	20×40	0.20	0.75	EKMM421VSN121MN40S		
680	30×60	0.15	2.15	EKMM351VSN681MR60S	120	22×35	0.20	0.75	EKMM421VSN121MP35S		
680	35×50	0.15	1.99	EKMM351VSN681MA50S	120	25.4×30	0.20	0.75	EKMM421VSN121MQ30S		
820	35×60	0.15	2.31	EKMM351VSN821MA60S	120	30×25	0.20	0.73	EKMM421VSN121MR25S		
400	39	20×20	0.15	0.32	EKMM401VSN390MN20S	120	35×20	0.20	0.67	EKMM421VSN121MA20S	
	47	20×25	0.15	0.39	EKMM401VSN470MN25S	150	20×50	0.20	0.88	EKMM421VSN151MN50S	
	47	22×20	0.15	0.37	EKMM401VSN470MP20S	150	22×40	0.20	0.88	EKMM421VSN151MP40S	
	56	20×25	0.15	0.51	EKMM401VSN560MN25S	150	25.4×35	0.20	0.88	EKMM421VSN151MQ35S	
	56	25.4×20	0.15	0.42	EKMM401VSN560MQ20S	150	30×25	0.20	0.88	EKMM421VSN151MR25S	
	68	20×30	0.15	0.56	EKMM401VSN680MN30S	180	22×45	0.20	0.95	EKMM421VSN181MP45S	
	68	22×25	0.15	0.50	EKMM401VSN680MP25S	180	25.4×35	0.20	0.95	EKMM421VSN181MQ35S	
	68	25.4×20	0.15	0.46	EKMM401VSN680MQ20S	180	30×30	0.20	0.95	EKMM421VSN181MR30S	
	82	20×30	0.15	0.64	EKMM401VSN820MN30S	180	35×25	0.20	0.94	EKMM421VSN181MA25S	
	82	22×25	0.15	0.64	EKMM401VSN820MP25S	220	22×50	0.20	1.10	EKMM421VSN221MP50S	
	82	30×20	0.15	0.55	EKMM401VSN820MR20S	220	25.4×45	0.20	1.10	EKMM421VSN221MQ45S	
	100	20×35	0.15	0.70	EKMM401VSN101MN35S	220	30×35	0.20	1.10	EKMM421VSN221MR35S	
	100	22×30	0.15	0.70	EKMM401VSN101MP30S	220	35×25	0.20	1.10	EKMM421VSN221MA25S	
	100	25.4×25	0.15	0.70	EKMM401VSN101MQ25S	270	25.4×50	0.20	1.22	EKMM421VSN271MQ50S	

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C, 120Hz)	Part No.
420	270	30×40	0.20	1.22	EKMM421VSN271MR40S	450	120	20×50	0.20	0.75	EKMM451VSN121MN50S
	270	35×30	0.20	1.22	EKMM421VSN271MA30S		120	22×40	0.20	0.80	EKMM451VSN121MP40S
	330	25.4×60	0.20	1.41	EKMM421VSN331MQ60S		120	25.4×30	0.20	0.80	EKMM451VSN121MQ30S
	330	30×45	0.20	1.45	EKMM421VSN331MR45S		120	30×25	0.20	0.80	EKMM451VSN121MR25S
	330	35×35	0.20	1.45	EKMM421VSN331MA35S		120	35×25	0.20	0.73	EKMM451VSN121MA25S
	390	30×50	0.20	1.55	EKMM421VSN391MR50S		150	22×45	0.20	0.88	EKMM451VSN151MP45S
	390	35×40	0.20	1.55	EKMM421VSN391MA40S		150	25.4×35	0.20	0.88	EKMM451VSN151MQ35S
	470	30×60	0.20	1.79	EKMM421VSN471MR60S		150	30×30	0.20	0.88	EKMM451VSN151MR30S
	470	35×45	0.20	1.90	EKMM421VSN471MA45S		150	35×25	0.20	0.75	EKMM451VSN151MA25S
	560	35×50	0.20	2.15	EKMM421VSN561MA50S		180	22×50	0.20	1.00	EKMM451VSN181MP50S
	680	35×60	0.20	2.27	EKMM421VSN681MA60S		180	25.4×40	0.20	1.00	EKMM451VSN181MQ40S
450	39	20×25	0.20	0.34	EKMM451VSN390MN25S	180	30×30	0.20	1.00	EKMM451VSN181MR30S	
	47	20×25	0.20	0.39	EKMM451VSN470MN25S	220	25.4×45	0.20	1.12	EKMM451VSN221MQ45S	
	56	20×30	0.20	0.51	EKMM451VSN560MN30S	220	30×35	0.20	1.12	EKMM451VSN221MR35S	
	56	22×25	0.20	0.40	EKMM451VSN560MP25S	220	35×30	0.20	1.12	EKMM451VSN221MA30S	
	68	20×35	0.20	0.56	EKMM451VSN680MN35S	270	25.4×60	0.20	1.18	EKMM451VSN271MQ60S	
	68	22×30	0.20	0.53	EKMM451VSN680MP30S	270	30×40	0.20	1.28	EKMM451VSN271MR40S	
	68	25.4×25	0.20	0.50	EKMM451VSN680MQ25S	270	35×35	0.20	1.28	EKMM451VSN271MA35S	
	82	20×35	0.20	0.64	EKMM451VSN820MN35S	330	30×50	0.20	1.45	EKMM451VSN331MR50S	
	82	22×30	0.20	0.64	EKMM451VSN820MP30S	330	35×40	0.20	1.45	EKMM451VSN331MA40S	
	82	25.4×25	0.20	0.64	EKMM451VSN820MQ25S	390	30×60	0.20	1.51	EKMM451VSN391MR60S	
	100	20×45	0.20	0.69	EKMM451VSN101MN45S	390	35×40	0.20	1.55	EKMM451VSN391MA40S	
	100	22×35	0.20	0.69	EKMM451VSN101MP35S	470	35×50	0.20	1.85	EKMM451VSN471MA50S	
	100	25.4×30	0.20	0.69	EKMM451VSN101MQ30S	560	35×60	0.20	1.91	EKMM451VSN561MA60S	
	100	30×25	0.20	0.64	EKMM451VSN101MR25S						

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SMH Series

- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics										
Category	Standard snap-ins, 85°C										
Temperature Range	-40 to +85°C										
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 20°C, 120Hz)
	tanδ (Max.)	0.60	0.50	0.40	0.30	0.25	0.20	0.15	0.15	0.15	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	4	4	3	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	15	15	10	8	6	6	5	5	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤150% of the initial specified value									
	Leakage current	≤The initial specified value									

◆DIMENSIONS [mm]


● Terminal Code : VS (φ22 to φ35) : Standard

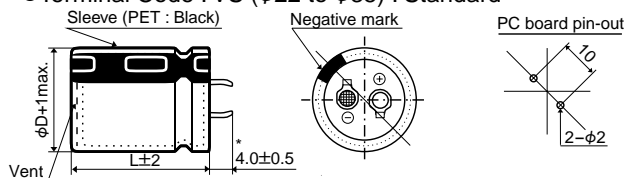


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

● Terminal Code : LI (φ35)

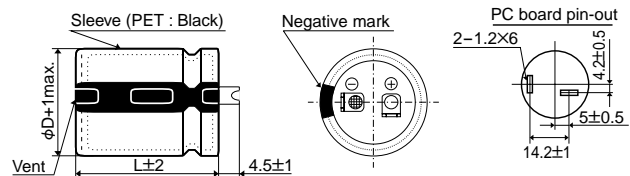

◆PART NUMBERING SYSTEM

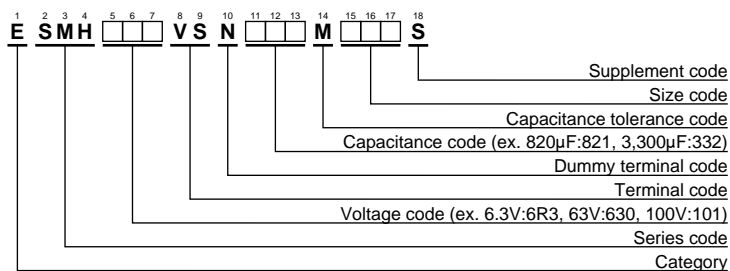

Please refer to "A guide to global code (snap-in type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
6.3	15,000	22 × 25	0.60	2.44	ESMH6R3VSN153MP25S	16	27,000	25.4 × 45	0.40	4.72	ESMH160VSN273MQ45S
	18,000	22 × 30	0.60	2.67	ESMH6R3VSN183MP30S		27,000	30 × 35	0.40	4.82	ESMH160VSN273MR35S
	18,000	25.4 × 25	0.60	2.70	ESMH6R3VSN183MQ25S		27,000	35 × 30	0.40	4.65	ESMH160VSN273MA30S
	22,000	22 × 30	0.60	3.06	ESMH6R3VSN223MP30S		33,000	25.4 × 50	0.40	5.33	ESMH160VSN333MQ50S
	22,000	25.4 × 25	0.60	3.07	ESMH6R3VSN223MQ25S		33,000	30 × 40	0.40	5.36	ESMH160VSN333MR40S
	27,000	22 × 35	0.60	3.49	ESMH6R3VSN273MP35S		33,000	35 × 30	0.40	5.15	ESMH160VSN333MA30S
	27,000	25.4 × 30	0.60	3.52	ESMH6R3VSN273MQ30S		39,000	30 × 45	0.40	6.01	ESMH160VSN393MR45S
	27,000	30 × 25	0.60	3.57	ESMH6R3VSN273MR25S		39,000	35 × 35	0.40	5.95	ESMH160VSN393MA35S
	33,000	22 × 40	0.60	3.97	ESMH6R3VSN333MP40S		47,000	30 × 50	0.40	6.79	ESMH160VSN473MR50S
	33,000	25.4 × 35	0.60	4.02	ESMH6R3VSN333MQ35S		47,000	35 × 40	0.40	6.76	ESMH160VSN473MA40S
	33,000	30 × 25	0.60	3.95	ESMH6R3VSN333MR25S		56,000	35 × 45	0.40	7.62	ESMH160VSN563MA45S
	39,000	22 × 50	0.60	4.55	ESMH6R3VSN393MP50S		68,000	35 × 50	0.40	8.63	ESMH160VSN683MA50S
	39,000	25.4 × 40	0.60	4.50	ESMH6R3VSN393MQ40S		5,600	22 × 25	0.30	2.21	ESMH250VSN563MP25S
	39,000	30 × 30	0.60	4.45	ESMH6R3VSN393MR30S		6,800	22 × 30	0.30	2.40	ESMH250VSN682MP30S
	39,000	35 × 25	0.60	4.51	ESMH6R3VSN393MA25S		6,800	25.4 × 25	0.30	2.56	ESMH250VSN682MQ25S
	47,000	25.4 × 45	0.60	5.09	ESMH6R3VSN473MQ45S		8,200	22 × 35	0.30	2.72	ESMH250VSN822MP35S
	47,000	30 × 35	0.60	5.06	ESMH6R3VSN473MR35S		8,200	25.4 × 25	0.30	2.80	ESMH250VSN822MQ25S
	47,000	35 × 30	0.60	5.01	ESMH6R3VSN473MA30S		10,000	22 × 40	0.30	3.09	ESMH250VSN103MP40S
	56,000	25.4 × 50	0.60	5.71	ESMH6R3VSN563MQ50S		10,000	25.4 × 30	0.30	3.12	ESMH250VSN103MQ30S
	56,000	30 × 40	0.60	5.70	ESMH6R3VSN563MR40S		10,000	30 × 25	0.30	3.21	ESMH250VSN103MR25S
56,000	35 × 30	0.60	5.77	ESMH6R3VSN563MA30S	12,000	22 × 45	0.30	3.48	ESMH250VSN123MP45S		
68,000	30 × 45	0.60	6.48	ESMH6R3VSN683MR45S	12,000	25.4 × 35	0.30	3.43	ESMH250VSN123MQ35S		
68,000	35 × 35	0.60	6.42	ESMH6R3VSN683MA35S	12,000	30 × 30	0.30	3.86	ESMH250VSN123MR30S		
82,000	30 × 50	0.60	7.32	ESMH6R3VSN823MR50S	12,000	35 × 25	0.30	3.54	ESMH250VSN123MA25S		
82,000	35 × 40	0.60	7.29	ESMH6R3VSN823MA40S	15,000	22 × 50	0.30	4.00	ESMH250VSN153MP50S		
100,000	35 × 45	0.60	8.31	ESMH6R3VSN104MA45S	15,000	25.4 × 40	0.30	3.95	ESMH250VSN153MQ40S		
10	12,000	22 × 25	0.50	2.39	ESMH100VSN123MP25S	15,000	30 × 30	0.30	4.00	ESMH250VSN153MR30S	
	15,000	22 × 30	0.50	2.76	ESMH100VSN153MP30S	15,000	35 × 25	0.30	3.95	ESMH250VSN153MA25S	
	15,000	25.4 × 25	0.50	2.77	ESMH100VSN153MQ25S	18,000	25.4 × 45	0.30	4.45	ESMH250VSN183MQ45S	
	18,000	22 × 35	0.50	3.12	ESMH100VSN183MP35S	18,000	30 × 35	0.30	4.46	ESMH250VSN183MR35S	
	18,000	25.4 × 25	0.50	3.04	ESMH100VSN183MQ25S	18,000	35 × 30	0.30	4.63	ESMH250VSN183MA30S	
	22,000	22 × 40	0.50	3.55	ESMH100VSN223MP40S	22,000	25.4 × 50	0.30	5.02	ESMH250VSN223MQ50S	
	22,000	25.4 × 30	0.50	3.48	ESMH100VSN223MQ30S	22,000	30 × 45	0.30	5.21	ESMH250VSN223MR45S	
	22,000	30 × 25	0.50	3.53	ESMH100VSN223MR25S	22,000	35 × 35	0.30	5.16	ESMH250VSN223MA35S	
	27,000	22 × 45	0.50	4.04	ESMH100VSN273MP45S	27,000	30 × 50	0.30	5.94	ESMH250VSN273MR50S	
	27,000	25.4 × 35	0.50	3.98	ESMH100VSN273MQ35S	27,000	35 × 40	0.30	5.92	ESMH250VSN273MA40S	
	27,000	30 × 30	0.50	3.73	ESMH100VSN273MR30S	33,000	35 × 45	0.30	6.75	ESMH250VSN333MA45S	
	27,000	35 × 25	0.50	3.73	ESMH100VSN273MA25S	39,000	35 × 50	0.30	7.56	ESMH250VSN393MA50S	
	33,000	22 × 50	0.50	4.58	ESMH100VSN333MP50S	3,900	22 × 25	0.25	2.22	ESMH350VSN392MP25S	
	33,000	25.4 × 40	0.50	4.54	ESMH100VSN333MQ40S	4,700	22 × 30	0.25	2.41	ESMH350VSN472MP30S	
	33,000	30 × 30	0.50	4.13	ESMH100VSN333MR30S	4,700	25.4 × 25	0.25	2.42	ESMH350VSN472MQ25S	
	33,000	35 × 25	0.50	4.13	ESMH100VSN333MA25S	5,600	22 × 35	0.25	2.75	ESMH350VSN562MP35S	
	39,000	25.4 × 45	0.50	5.08	ESMH100VSN393MQ45S	5,600	25.4 × 25	0.25	2.64	ESMH350VSN562MQ25S	
	39,000	30 × 35	0.50	5.05	ESMH100VSN393MR35S	6,800	22 × 40	0.25	2.80	ESMH350VSN682MP40S	
	39,000	35 × 30	0.50	4.80	ESMH100VSN393MA35S	6,800	25.4 × 30	0.25	2.74	ESMH350VSN682MQ30S	
	47,000	25.4 × 50	0.50	5.73	ESMH100VSN473MQ50S	6,800	30 × 25	0.25	2.97	ESMH350VSN682MR25S	
47,000	30 × 40	0.50	5.72	ESMH100VSN473MR40S	8,200	22 × 45	0.25	3.47	ESMH350VSN822MP45S		
47,000	35 × 30	0.50	5.27	ESMH100VSN473MA30S	8,200	25.4 × 35	0.25	3.10	ESMH350VSN822MQ35S		
56,000	30 × 45	0.50	6.44	ESMH100VSN563MR45S	8,200	30 × 30	0.25	3.13	ESMH350VSN822MR30S		
56,000	35 × 35	0.50	6.38	ESMH100VSN563MA35S	8,200	35 × 25	0.25	2.73	ESMH350VSN822MA25S		
68,000	30 × 50	0.50	7.27	ESMH100VSN683MR50S	10,000	22 × 50	0.25	3.57	ESMH350VSN103MP50S		
68,000	35 × 40	0.50	7.27	ESMH100VSN683MA40S	10,000	25.4 × 40	0.25	3.53	ESMH350VSN103MQ40S		
82,000	35 × 50	0.50	8.49	ESMH100VSN823MA50S	10,000	30 × 30	0.25	3.46	ESMH350VSN103MR30S		
16	8,200	22 × 25	0.40	2.51	ESMH160VSN822MP25S	10,000	35 × 25	0.25	3.02	ESMH350VSN103MA25S	
	10,000	22 × 25	0.40	2.77	ESMH160VSN103MP25S	12,000	25.4 × 45	0.25	3.98	ESMH350VSN123MQ45S	
	12,000	22 × 30	0.40	2.86	ESMH160VSN123MP30S	12,000	30 × 35	0.25	4.01	ESMH350VSN123MR35S	
	12,000	25.4 × 25	0.40	2.95	ESMH160VSN123MQ25S	12,000	35 × 30	0.25	4.42	ESMH350VSN123MA30S	
	15,000	22 × 35	0.40	3.29	ESMH160VSN153MP35S	15,000	25.4 × 50	0.25	4.54	ESMH350VSN123MQ50S	
	15,000	25.4 × 30	0.40	3.46	ESMH160VSN153MQ30S	15,000	30 × 40	0.25	4.52	ESMH350VSN153MR40S	
	15,000	30 × 25	0.40	3.66	ESMH160VSN153MR25S	15,000	35 × 35	0.25	5.01	ESMH350VSN153MA35S	
	18,000	22 × 40	0.40	3.72	ESMH160VSN183MP40S	18,000	30 × 45	0.25	4.71	ESMH350VSN183MR45S	
	18,000	25.4 × 35	0.40	3.98	ESMH160VSN183MQ35S	18,000	35 × 40	0.25	5.54	ESMH350VSN183MA40S	
	18,000	30 × 25	0.40	4.00	ESMH160VSN183MR25S	22,000	30 × 50	0.25	5.33	ESMH350VSN223MR50S	
	22,000	22 × 50	0.40	4.37	ESMH160VSN223MP50S	22,000	35 × 45	0.25	6.04	ESMH350VSN223MA45S	
	22,000	25.4 × 40	0.40	4.26	ESMH160VSN223MQ40S	27,000	35 × 50	0.25	6.89	ESMH350VSN273MA50S	
	22,000	30 × 30	0.40	4.21	ESMH160VSN223MR30S	2,200	22 × 25	0.20	1.91	ESMH500VSN222MP25S	
	22,000	35 × 25	0.40	4.15	ESMH160VSN223MA25S	3,300	22 × 30	0.20	2.37	ESMH500VSN332MP30S	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
50	3,300	25.4×25	0.20	2.38	ESMH500VSN332MQ25S	80	1,200	22×25	0.15	1.69	ESMH800VSN122MP25S
	3,900	22×35	0.20	2.65	ESMH500VSN392MP35S		1,500	22×25	0.15	1.88	ESMH800VSN152MP25S
	3,900	25.4×30	0.20	2.68	ESMH500VSN392MQ30S		1,800	22×30	0.15	2.14	ESMH800VSN182MP30S
	3,900	30×25	0.20	2.55	ESMH500VSN392MR25S		1,800	25.4×25	0.15	2.26	ESMH800VSN182MQ25S
	4,700	22×40	0.20	2.99	ESMH500VSN472MP40S		2,200	22×35	0.15	2.44	ESMH800VSN222MP35S
	4,700	25.4×35	0.20	3.03	ESMH500VSN472MQ35S		2,200	25.4×30	0.15	2.46	ESMH800VSN222MQ30S
	4,700	30×25	0.20	2.81	ESMH500VSN472MR25S		2,200	30×25	0.15	2.49	ESMH800VSN222MR25S
	5,600	22×45	0.20	3.36	ESMH500VSN562MP45S		2,700	22×40	0.15	2.78	ESMH800VSN272MP40S
	5,600	25.4×35	0.20	3.31	ESMH500VSN562MQ35S		2,700	25.4×35	0.15	2.81	ESMH800VSN272MQ35S
	5,600	30×30	0.20	3.37	ESMH500VSN562MR30S		2,700	30×25	0.15	2.75	ESMH800VSN272MR25S
	5,600	35×25	0.20	3.42	ESMH500VSN562MA25S		3,300	22×45	0.15	3.16	ESMH800VSN332MP45S
	6,800	22×50	0.20	3.81	ESMH500VSN682MP50S		3,300	25.4×40	0.15	3.21	ESMH800VSN332MQ40S
	6,800	25.4×40	0.20	3.81	ESMH500VSN682MQ40S		3,300	30×30	0.15	3.17	ESMH800VSN332MR30S
	6,800	30×35	0.20	3.85	ESMH500VSN682MR35S		3,300	35×25	0.15	3.21	ESMH800VSN332MA25S
	6,800	35×30	0.20	3.85	ESMH500VSN682MA30S		3,900	22×50	0.15	3.52	ESMH800VSN392MP50S
	8,200	25.4×50	0.20	4.37	ESMH500VSN822MQ50S		3,900	25.4×45	0.15	3.59	ESMH800VSN392MQ45S
	8,200	30×40	0.20	4.36	ESMH500VSN822MR40S		3,900	30×35	0.15	3.57	ESMH800VSN392MR35S
	8,200	35×30	0.20	4.41	ESMH500VSN822MA30S		3,900	35×25	0.15	3.50	ESMH800VSN392MA25S
	10,000	30×45	0.20	4.97	ESMH500VSN103MR45S		4,700	25.4×50	0.15	4.05	ESMH800VSN472MQ50S
	10,000	35×35	0.20	4.92	ESMH500VSN103MA35S		4,700	30×40	0.15	4.05	ESMH800VSN472MR40S
12,000	30×50	0.20	5.60	ESMH500VSN123MR50S	4,700	35×30	0.15	4.09	ESMH800VSN472MA30S		
12,000	35×40	0.20	5.58	ESMH500VSN123MA40S	5,600	30×45	0.15	4.55	ESMH800VSN562MR45S		
15,000	35×45	0.20	6.44	ESMH500VSN153MA45S	5,600	35×35	0.15	4.51	ESMH800VSN562MA35S		
18,000	35×50	0.20	6.71	ESMH500VSN183MA50S	6,800	30×50	0.15	5.16	ESMH800VSN682MR50S		
63	1,800	22×25	0.15	1.82	ESMH630VSN182MP25S	6,800	35×40	0.15	5.14	ESMH800VSN682MA40S	
	2,200	22×30	0.15	2.31	ESMH630VSN222MP30S	8,200	35×45	0.15	5.83	ESMH800VSN822MA45S	
	2,200	25.4×25	0.15	2.30	ESMH630VSN222MQ25S	10,000	35×50	0.15	6.63	ESMH800VSN103MA50S	
	2,700	22×35	0.15	2.40	ESMH630VSN272MP35S	820	22×25	0.15	1.86	ESMH101VSN821MP25S	
	2,700	25.4×25	0.15	2.40	ESMH630VSN272MQ25S	1,200	22×30	0.15	2.09	ESMH101VSN122MP30S	
	3,300	22×35	0.15	2.62	ESMH630VSN332MP35S	1,200	25.4×25	0.15	2.10	ESMH101VSN122MQ25S	
	3,300	25.4×30	0.15	2.64	ESMH630VSN332MQ30S	1,500	22×35	0.15	2.41	ESMH101VSN152MP35S	
	3,300	30×25	0.15	2.78	ESMH630VSN332MR25S	1,500	25.4×30	0.15	2.43	ESMH101VSN152MQ30S	
	3,900	22×40	0.15	2.93	ESMH630VSN392MP40S	1,500	30×25	0.15	2.46	ESMH101VSN152MR25S	
	3,900	25.4×35	0.15	2.97	ESMH630VSN392MQ35S	1,800	22×40	0.15	2.71	ESMH101VSN182MP40S	
	3,900	30×30	0.15	3.00	ESMH630VSN392MR30S	1,800	25.4×35	0.15	2.75	ESMH101VSN182MQ35S	
	3,900	35×25	0.15	3.00	ESMH630VSN392MA25S	1,800	30×25	0.15	2.72	ESMH101VSN182MR25S	
	4,700	22×50	0.15	3.39	ESMH630VSN472MP50S	2,200	22×45	0.15	3.08	ESMH101VSN222MP45S	
	4,700	25.4×40	0.15	3.36	ESMH630VSN472MQ40S	2,200	25.4×40	0.15	3.13	ESMH101VSN222MQ40S	
	4,700	30×30	0.15	3.32	ESMH630VSN472MR30S	2,200	30×30	0.15	3.09	ESMH101VSN222MR30S	
	4,700	35×25	0.15	3.36	ESMH630VSN472MA25S	2,200	35×25	0.15	3.14	ESMH101VSN222MA25S	
	5,600	25.4×45	0.15	3.77	ESMH630VSN562MQ45S	2,700	22×50	0.15	3.53	ESMH101VSN272MP50S	
	5,600	30×35	0.15	3.75	ESMH630VSN562MR35S	2,700	25.4×45	0.15	3.57	ESMH101VSN272MQ45S	
	5,600	35×30	0.15	3.76	ESMH630VSN562MA30S	2,700	30×35	0.15	3.55	ESMH101VSN272MR35S	
	6,800	25.4×50	0.15	4.27	ESMH630VSN682MQ50S	2,700	35×30	0.15	3.71	ESMH101VSN272MA30S	
6,800	30×40	0.15	4.27	ESMH630VSN682MR40S	3,300	25.4×50	0.15	4.06	ESMH101VSN332MQ50S		
6,800	35×30	0.15	4.15	ESMH630VSN682MA30S	3,300	30×40	0.15	4.05	ESMH101VSN332MR40S		
8,200	30×45	0.15	4.83	ESMH630VSN822MR45S	3,300	35×30	0.15	4.05	ESMH101VSN332MA30S		
8,200	35×35	0.15	4.79	ESMH630VSN822MA35S	3,900	30×45	0.15	4.54	ESMH101VSN392MR45S		
10,000	30×50	0.15	5.49	ESMH630VSN103MR50S	3,900	35×35	0.15	4.49	ESMH101VSN392MA35S		
10,000	35×40	0.15	5.47	ESMH630VSN103MA40S	4,700	30×50	0.15	5.13	ESMH101VSN472MR50S		
12,000	35×45	0.15	6.19	ESMH630VSN123MA45S	4,700	35×40	0.15	5.11	ESMH101VSN472MA40S		
100	820	22×25	0.15	1.86	ESMH101VSN821MP25S	5,600	35×45	0.15	5.75	ESMH101VSN562MA45S	
	1,200	22×30	0.15	2.09	ESMH101VSN122MP30S	6,800	35×50	0.15	6.50	ESMH101VSN682MA50S	
	1,200	25.4×25	0.15	2.10	ESMH101VSN122MQ25S						
	1,500	22×35	0.15	2.41	ESMH101VSN152MP35S						
	1,500	25.4×30	0.15	2.43	ESMH101VSN152MQ30S						
	1,500	30×25	0.15	2.46	ESMH101VSN152MR25S						
	1,800	22×40	0.15	2.71	ESMH101VSN182MP40S						
	1,800	25.4×35	0.15	2.75	ESMH101VSN182MQ35S						
	1,800	30×25	0.15	2.72	ESMH101VSN182MR25S						
	2,200	22×45	0.15	3.08	ESMH101VSN222MP45S						

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
6.3 to 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100V _{dc}	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

KMH Series

- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics										
Category	-40 to +105°C										
Temperature Range											
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.02CV or 3mA, whichever is smaller Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 20°C, 120Hz)
	tanδ (Max.)	0.60	0.50	0.40	0.30	0.25	0.20	0.15	0.15	0.15	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	4	4	3	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	15	15	10	8	6	6	5	5	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤150% of the initial specified value									
	Leakage current	≤The initial specified value									

◆DIMENSIONS [mm]


●Terminal Code : VS (φ22 to φ35) : Standard

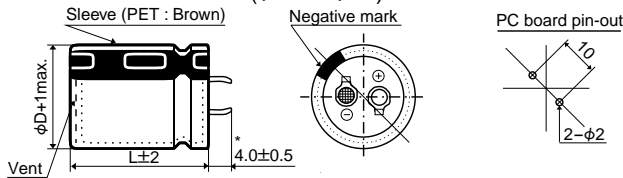


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

●Terminal Code : LI (φ35)

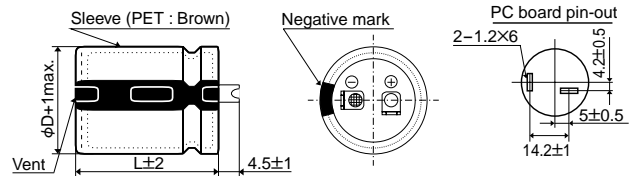

◆PART NUMBERING SYSTEM

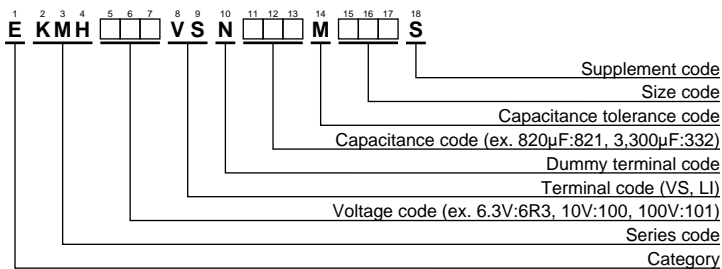

Please refer to "A guide to global code (snap-in type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	
6.3	12,000	22×25	0.60	1.54	EKMH6R3VSN123MP25S	16	27,000	35×30	0.40	3.45	EKMH160VSN273MA30S	
	15,000	22×25	0.60	1.72	EKMH6R3VSN153MP25S		33,000	30×45	0.40	4.30	EKMH160VSN333MR45S	
	18,000	22×30	0.60	1.95	EKMH6R3VSN183MP30S		33,000	35×35	0.40	4.26	EKMH160VSN333MA35S	
	18,000	25.4×25	0.60	1.96	EKMH6R3VSN183MQ25S		39,000	30×50	0.40	4.81	EKMH160VSN393MR50S	
	22,000	22×35	0.60	2.23	EKMH6R3VSN223MP35S		39,000	35×40	0.40	4.79	EKMH160VSN393MA40S	
	22,000	25.4×30	0.60	2.25	EKMH6R3VSN223MQ30S		47,000	35×45	0.40	5.43	EKMH160VSN473MA45S	
	22,000	30×25	0.60	2.28	EKMH6R3VSN223MR25S		25	4,700	22×25	0.30	1.50	EKMH250VSN472MP25S
	27,000	22×40	0.60	2.54	EKMH6R3VSN273MP40S			5,600	22×25	0.30	1.63	EKMH250VSN562MP25S
	27,000	25.4×35	0.60	2.57	EKMH6R3VSN273MQ35S			6,800	22×30	0.30	1.86	EKMH250VSN682MP30S
	27,000	30×25	0.60	2.52	EKMH6R3VSN273MR25S			6,800	25.4×25	0.30	1.87	EKMH250VSN682MQ25S
	33,000	22×45	0.60	2.88	EKMH6R3VSN333MP45S			8,200	22×35	0.30	2.11	EKMH250VSN822MP35S
	33,000	25.4×40	0.60	2.93	EKMH6R3VSN333MQ40S			8,200	25.4×30	0.30	2.12	EKMH250VSN822MQ30S
	33,000	30×30	0.60	2.89	EKMH6R3VSN333MR30S	8,200		30×25	0.30	2.15	EKMH250VSN822MR25S	
	33,000	35×25	0.60	2.93	EKMH6R3VSN333MA25S	10,000		22×40	0.30	2.39	EKMH250VSN103MP40S	
	39,000	25.4×40	0.60	3.18	EKMH6R3VSN393MQ40S	10,000		25.4×35	0.30	2.42	EKMH250VSN103MQ35S	
	39,000	30×35	0.60	3.26	EKMH6R3VSN393MR35S	10,000		30×25	0.30	2.37	EKMH250VSN103MR25S	
	39,000	35×30	0.60	3.40	EKMH6R3VSN393MA30S	12,000		22×45	0.30	2.69	EKMH250VSN123MP45S	
	47,000	25.4×50	0.60	3.69	EKMH6R3VSN473MQ50S	12,000		25.4×40	0.30	2.74	EKMH250VSN123MQ40S	
	47,000	30×40	0.60	3.69	EKMH6R3VSN473MR40S	12,000	30×30	0.30	2.70	EKMH250VSN123MR30S		
	47,000	35×30	0.60	3.73	EKMH6R3VSN473MA30S	12,000	35×25	0.30	2.74	EKMH250VSN123MA25S		
	56,000	30×45	0.60	4.16	EKMH6R3VSN563MR45S	15,000	25.4×45	0.30	3.15	EKMH250VSN153MQ45S		
	56,000	35×35	0.60	4.12	EKMH6R3VSN563MA35S	15,000	30×35	0.30	3.13	EKMH250VSN153MR35S		
	68,000	30×50	0.60	4.71	EKMH6R3VSN683MR50S	15,000	35×30	0.30	3.27	EKMH250VSN153MA30S		
	68,000	35×40	0.60	4.69	EKMH6R3VSN683MA40S	18,000	25.4×50	0.30	3.54	EKMH250VSN183MQ50S		
82,000	35×45	0.60	5.32	EKMH6R3VSN823MA45S	18,000	30×40	0.30	3.54	EKMH250VSN183MR40S			
10	10,000	22×25	0.50	1.55	EKMH100VSN103MP25S	18,000	35×30	0.30	3.58	EKMH250VSN183MA30S		
	12,000	22×30	0.50	1.77	EKMH100VSN123MP30S	22,000	30×45	0.30	4.04	EKMH250VSN223MR45S		
	15,000	22×30	0.50	1.97	EKMH100VSN153MP30S	22,000	35×35	0.30	3.64	EKMH250VSN223MA35S		
	15,000	25.4×25	0.50	1.96	EKMH100VSN153MQ25S	27,000	35×45	0.30	4.73	EKMH250VSN273MA45S		
	18,000	22×35	0.50	2.21	EKMH100VSN183MP35S	33,000	35×50	0.30	5.39	EKMH250VSN333MA50S		
	18,000	25.4×30	0.50	2.23	EKMH100VSN183MQ30S	35	3,300	22×25	0.25	1.40	EKMH350VSN332MP25S	
	22,000	22×40	0.50	2.51	EKMH100VSN223MP40S		3,900	22×30	0.25	1.57	EKMH350VSN392MP30S	
	22,000	25.4×35	0.50	2.54	EKMH100VSN223MQ35S		4,700	22×30	0.25	1.72	EKMH350VSN472MP30S	
	22,000	30×25	0.50	2.40	EKMH100VSN223MR25S		4,700	25.4×25	0.25	1.80	EKMH350VSN472MQ25S	
	27,000	22×50	0.50	2.93	EKMH100VSN273MP50S		5,600	22×35	0.25	1.95	EKMH350VSN562MP35S	
	27,000	25.4×40	0.50	2.90	EKMH100VSN273MQ40S		5,600	25.4×30	0.25	1.96	EKMH350VSN562MQ30S	
	27,000	30×30	0.50	2.87	EKMH100VSN273MR30S		5,600	30×25	0.25	1.99	EKMH350VSN562MR25S	
	27,000	35×25	0.50	2.73	EKMH100VSN273MA25S		6,800	22×40	0.25	2.20	EKMH350VSN682MP40S	
	33,000	25.4×45	0.50	3.30	EKMH100VSN333MQ45S		6,800	25.4×35	0.25	2.23	EKMH350VSN682MQ35S	
	33,000	30×35	0.50	3.28	EKMH100VSN333MR35S		6,800	30×25	0.25	2.19	EKMH350VSN682MR25S	
	33,000	35×30	0.50	3.16	EKMH100VSN333MA30S		8,200	22×50	0.25	2.55	EKMH350VSN822MP50S	
	39,000	25.4×50	0.50	3.68	EKMH100VSN393MQ50S		8,200	25.4×40	0.25	2.53	EKMH350VSN822MQ40S	
	39,000	30×40	0.50	3.69	EKMH100VSN393MR40S	8,200	30×30	0.25	2.75	EKMH350VSN822MR30S		
	39,000	35×30	0.50	3.43	EKMH100VSN393MA30S	8,200	35×25	0.25	2.75	EKMH350VSN822MA25S		
	47,000	30×45	0.50	4.17	EKMH100VSN473MR45S	10,000	25.4×45	0.25	2.87	EKMH350VSN103MQ45S		
	47,000	35×35	0.50	3.76	EKMH100VSN473MA35S	10,000	30×35	0.25	2.90	EKMH350VSN103MR35S		
	56,000	30×50	0.50	4.68	EKMH100VSN563MR50S	10,000	35×30	0.25	2.91	EKMH350VSN103MA30S		
	56,000	35×40	0.50	4.67	EKMH100VSN563MA40S	12,000	25.4×50	0.25	3.24	EKMH350VSN123MQ50S		
	68,000	35×50	0.50	5.46	EKMH100VSN683MA50S	12,000	30×40	0.25	3.23	EKMH350VSN123MR40S		
16	6,800	22×25	0.40	1.57	EKMH160VSN682MP25S	12,000	35×30	0.25	2.99	EKMH350VSN123MA30S		
	10,000	22×30	0.40	1.97	EKMH160VSN103MP30S	15,000	30×45	0.25	3.72	EKMH350VSN153MR45S		
	1,000	25.4×25	0.40	1.97	EKMH160VSN103MQ25S	15,000	35×35	0.25	3.67	EKMH350VSN153MA35S		
	12,000	22×35	0.40	2.22	EKMH160VSN123MP35S	18,000	35×40	0.25	4.37	EKMH350VSN183MA40S		
	12,000	25.4×30	0.40	2.24	EKMH160VSN123MQ30S	22,000	35×50	0.25	4.92	EKMH350VSN223MA50S		
	12,000	30×25	0.40	2.45	EKMH160VSN123MR25S	50	1,800	22×25	0.20	1.33	EKMH500VSN182MP25S	
	15,000	22×40	0.40	2.55	EKMH160VSN153MP40S		2,700	22×30	0.20	1.69	EKMH500VSN272MP30S	
	15,000	25.4×35	0.40	2.58	EKMH160VSN153MQ35S		2,700	25.4×25	0.20	1.70	EKMH500VSN272MQ25S	
	15,000	30×25	0.40	2.52	EKMH160VSN153MR25S		3,300	22×35	0.20	1.93	EKMH500VSN332MP35S	
	18,000	22×45	0.40	2.87	EKMH160VSN183MP45S		3,300	25.4×30	0.20	1.85	EKMH500VSN332MQ30S	
	18,000	25.4×40	0.40	2.92	EKMH160VSN183MQ40S		3,900	22×40	0.20	2.16	EKMH500VSN392MP40S	
	18,000	30×30	0.40	2.88	EKMH160VSN183MR30S		3,900	25.4×35	0.20	2.18	EKMH500VSN392MQ35S	
	18,000	35×25	0.40	2.92	EKMH160VSN183MA25S		3,900	30×25	0.20	1.95	EKMH500VSN392MR25S	
	22,000	25.4×45	0.40	3.32	EKMH160VSN223MQ45S		4,700	22×45	0.20	2.43	EKMH500VSN472MP45S	
	22,000	30×35	0.40	3.29	EKMH160VSN223MR35S		4,700	25.4×35	0.20	2.39	EKMH500VSN472MQ35S	
	22,000	35×25	0.40	3.23	EKMH160VSN223MA25S		4,700	30×30	0.20	2.25	EKMH500VSN472MR30S	
	27,000	25.4×50	0.40	3.78	EKMH160VSN273MQ50S		4,700	35×25	0.20	2.48	EKMH500VSN472MA25S	
	27,000	30×40	0.40	3.77	EKMH160VSN273MR40S	5,600	22×50	0.20	2.75	EKMH500VSN562MP50S		

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
50	5,600	25.4 × 40	0.20	2.70	EKMH500VSN562MQ40S	80	1,800	25.4 × 30	0.15	1.76	EKMH800VSN182MQ30S
	5,600	30 × 35	0.20	2.76	EKMH500VSN562MR35S		1,800	30 × 25	0.15	1.65	EKMH800VSN182MR25S
	5,600	35 × 25	0.20	2.70	EKMH500VSN562MA25S		2,200	22 × 45	0.15	2.04	EKMH800VSN222MP45S
	6,800	25.4 × 50	0.20	3.30	EKMH500VSN682MQ50S		2,200	25.4 × 35	0.15	2.01	EKMH800VSN222MQ35S
	6,800	30 × 40	0.20	3.30	EKMH500VSN682MR40S		2,200	30 × 30	0.15	2.05	EKMH800VSN222MR30S
	6,800	35 × 30	0.20	3.25	EKMH500VSN682MA30S		2,200	35 × 25	0.15	2.07	EKMH800VSN222MA25S
	8,200	30 × 45	0.20	3.60	EKMH500VSN822MR45S		2,700	25.4 × 45	0.15	2.36	EKMH800VSN272MQ45S
	8,200	35 × 35	0.20	3.55	EKMH500VSN822MA35S		2,700	30 × 35	0.15	2.35	EKMH800VSN272MR35S
	10,000	30 × 50	0.20	4.04	EKMH500VSN103MR50S		2,700	35 × 25	0.15	2.29	EKMH800VSN272MA25S
	10,000	35 × 40	0.20	4.03	EKMH500VSN103MA40S		3,300	25.4 × 50	0.15	2.68	EKMH800VSN332MQ50S
12,000	35 × 45	0.20	4.55	EKMH500VSN123MA45S	3,300	30 × 40	0.15	2.68	EKMH800VSN332MR40S		
63	1,200	22 × 25	0.15	1.19	EKMH630VSN122MP25S	3,300	35 × 30	0.15	2.45	EKMH800VSN332MA30S	
	1,500	22 × 25	0.15	1.33	EKMH630VSN152MP25S	3,900	30 × 45	0.15	3.00	EKMH800VSN392MR45S	
	1,800	22 × 30	0.15	1.51	EKMH630VSN182MP30S	3,900	35 × 35	0.15	2.98	EKMH800VSN392MA35S	
	1,800	25.4 × 25	0.15	1.52	EKMH630VSN182MQ25S	4,700	30 × 50	0.15	3.39	EKMH800VSN472MR50S	
	2,200	22 × 35	0.15	1.73	EKMH630VSN222MP35S	4,700	35 × 40	0.15	3.38	EKMH800VSN472MA40S	
	2,200	25.4 × 30	0.15	1.74	EKMH630VSN222MQ30S	5,600	35 × 45	0.15	3.80	EKMH800VSN562MA45S	
	2,700	22 × 40	0.15	1.97	EKMH630VSN272MP40S	6,800	35 × 50	0.15	3.90	EKMH800VSN682MA50S	
	2,700	25.4 × 35	0.15	1.99	EKMH630VSN272MQ35S	100	560	22 × 25	0.15	1.05	EKMH101VSN561MP25S
	2,700	30 × 25	0.15	1.76	EKMH630VSN272MR25S		820	22 × 30	0.15	1.32	EKMH101VSN821MP30S
	3,300	22 × 50	0.15	2.29	EKMH630VSN332MP50S		820	25.4 × 25	0.15	1.33	EKMH101VSN821MQ25S
	3,300	25.4 × 40	0.15	2.27	EKMH630VSN332MQ40S		1,000	22 × 35	0.15	1.50	EKMH101VSN102MP35S
	3,300	30 × 30	0.15	2.24	EKMH630VSN332MR30S		1,000	25.4 × 30	0.15	1.51	EKMH101VSN102MQ30S
	3,300	35 × 25	0.15	2.06	EKMH630VSN332MA25S		1,200	22 × 40	0.15	1.69	EKMH101VSN122MP40S
	3,900	25.4 × 45	0.15	2.54	EKMH630VSN392MQ45S		1,200	25.4 × 35	0.15	1.71	EKMH101VSN122MQ35S
	3,900	30 × 35	0.15	2.55	EKMH630VSN392MR35S		1,200	30 × 25	0.15	1.68	EKMH101VSN122MR25S
	3,900	35 × 25	0.15	2.24	EKMH630VSN392MA25S		1,500	22 × 45	0.15	1.94	EKMH101VSN152MP45S
	4,700	25.4 × 50	0.15	2.86	EKMH630VSN472MQ50S		1,500	25.4 × 40	0.15	1.98	EKMH101VSN152MQ40S
	4,700	30 × 40	0.15	2.86	EKMH630VSN472MR40S	1,500	30 × 30	0.15	1.95	EKMH101VSN152MR30S	
	4,700	35 × 30	0.15	2.79	EKMH630VSN472MA30S	1,500	35 × 25	0.15	1.98	EKMH101VSN152MA25S	
	5,600	30 × 45	0.15	3.22	EKMH630VSN562MR45S	1,800	25.4 × 45	0.15	2.23	EKMH101VSN182MQ45S	
5,600	35 × 35	0.15	3.19	EKMH630VSN562MA35S	1,800	30 × 35	0.15	2.50	EKMH101VSN182MR35S		
6,800	30 × 50	0.15	3.65	EKMH630VSN682MR50S	1,800	35 × 25	0.15	2.17	EKMH101VSN182MA25S		
6,800	35 × 40	0.15	3.64	EKMH630VSN682MA40S	2,200	25.4 × 50	0.15	2.53	EKMH101VSN222MQ50S		
8,200	35 × 45	0.15	3.90	EKMH630VSN822MA45S	2,200	30 × 40	0.15	2.70	EKMH101VSN222MR40S		
10,000	35 × 50	0.15	4.40	EKMH630VSN103MA50S	2,200	35 × 30	0.15	2.50	EKMH101VSN222MA30S		
80	820	22 × 25	0.15	1.11	EKMH800VSN821MP25S	2,700	30 × 45	0.15	2.88	EKMH101VSN272MR45S	
	1,000	22 × 25	0.15	1.22	EKMH800VSN102MP25S	2,700	35 × 35	0.15	2.86	EKMH101VSN272MA35S	
	1,200	22 × 30	0.15	1.38	EKMH800VSN122MP30S	3,300	30 × 50	0.15	3.28	EKMH101VSN332MR50S	
	1,200	25.4 × 25	0.15	1.39	EKMH800VSN122MQ25S	3,300	35 × 40	0.15	3.27	EKMH101VSN332MA40S	
	1,500	22 × 35	0.15	1.59	EKMH800VSN152MP35S	3,900	35 × 45	0.15	3.67	EKMH101VSN392MA45S	
	1,500	25.4 × 30	0.15	1.61	EKMH800VSN152MQ30S	4,700	35 × 50	0.15	3.80	EKMH101VSN472MA50S	
	1,800	22 × 40	0.15	1.80	EKMH800VSN182MP40S						

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
6.3 to 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100V _{dc}	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SLM Series

- 15mm height snap-ins
- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics	
Category	-25 to +85°C	
Temperature Range		
Rated Voltage Range	160 to 400V _{dc}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V
	tanδ (Max.)	0.20 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V
	Z (-25°C) / Z (+20°C)	4 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.	
	Capacitance change	≤ ±20% of the initial value
	D.F. (tanδ)	≤ 200% of the initial specified value
	Leakage current	≤ The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.	
	Capacitance change	≤ ±15% of the initial value
	D.F. (tanδ)	≤ 150% of the initial specified value
	Leakage current	≤ The initial specified value


◆ DIMENSIONS [mm]

- Terminal Code : VS

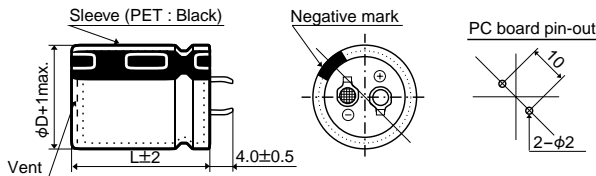

No plastic disk is the standard design

◆ PART NUMBERING SYSTEM

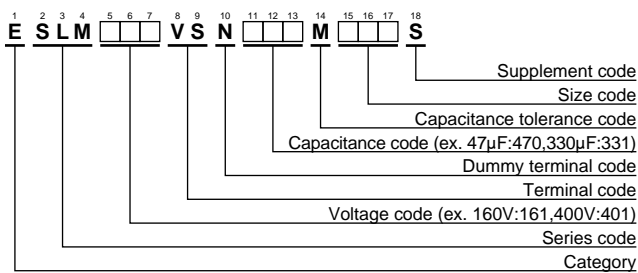

Please refer to "A guide to global code (snap-in type)"

◆ STANDARD RATINGS

WV (V _{dc})	Cap (µF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	
160	180	22×15	0.20	0.99	ESLM161VSN181MP15S	
	270	25.4×15	0.20	1.29	ESLM161VSN271MQ15S	
	390	30×15	0.20	1.47	ESLM161VSN391MR15S	
	560	35×15	0.20	1.74	ESLM161VSN561MA15S	
180	150	22×15	0.20	0.90	ESLM181VSN151MP15S	
	220	25.4×15	0.20	1.16	ESLM181VSN221MQ15S	
	330	30×15	0.20	1.35	ESLM181VSN331MR15S	
	470	35×15	0.20	1.60	ESLM181VSN471MA15S	
200	150	22×15	0.20	0.90	ESLM201VSN151MP15S	
	220	25.4×15	0.20	1.16	ESLM201VSN221MQ15S	
	200	270	30×15	0.20	1.22	ESLM201VSN271MR15S
390		35×15	0.20	1.46	ESLM201VSN391MA15S	
250		100	22×15	0.20	0.73	ESLM251VSN101MP15S
		150	25.4×15	0.20	0.96	ESLM251VSN151MQ15S
	220	30×15	0.20	1.10	ESLM251VSN221MR15S	
400	330	35×15	0.20	1.34	ESLM251VSN331MA15S	
	47	22×15	0.20	0.50	ESLM401VSN470MP15S	
	68	25.4×15	0.20	0.65	ESLM401VSN680MQ15S	
	100	30×15	0.20	0.74	ESLM401VSN101MR15S	
	120	35×15	0.20	0.81	ESLM401VSN121MA15S	

◆ RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

KLM Series

- 15mm height snap-ins
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant

KLM

Low profile
KMH




◆ SPECIFICATIONS

Items	Characteristics	
Category	-25 to +105°C	
Temperature Range	-25 to +105°C	
Rated Voltage Range	160 to 400V _{dc}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V
	tanδ (Max.)	0.20 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V
	Z (-25°C) / Z (+20°C)	4 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.	
	Capacitance change	≤ ±20% of the initial value
	D.F. (tanδ)	≤ 200% of the initial specified value
	Leakage current	≤ The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.	
	Capacitance change	≤ ±15% of the initial value
	D.F. (tanδ)	≤ 150% of the initial specified value
	Leakage current	≤ The initial specified value


◆ DIMENSIONS [mm]

- Terminal Code : VS

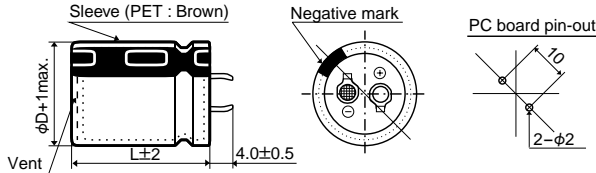

No plastic disk is the standard design

◆ PART NUMBERING SYSTEM

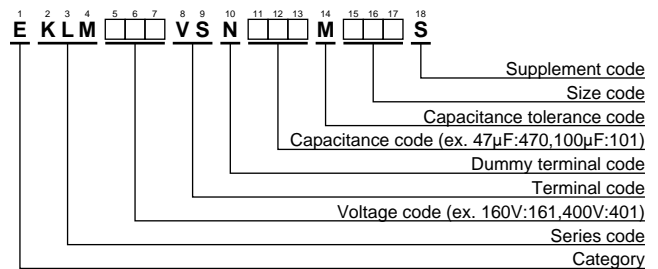

Please refer to "A guide to global code (snap-in type)"

◆ STANDARD RATINGS

WV (V _{dc})	Cap (µF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	150	22 × 15	0.20	0.68	EKLM161VSN151MP15S
	180	25.4 × 15	0.20	0.79	EKLM161VSN181MQ15S
	220	25.4 × 15	0.20	0.88	EKLM161VSN221MQ15S
	270	30 × 15	0.20	0.96	EKLM161VSN271MR15S
	330	30 × 15	0.20	1.06	EKLM161VSN331MR15S
180	390	35 × 15	0.20	1.20	EKLM161VSN391MA15S
	120	22 × 15	0.20	0.61	EKLM181VSN121MP15S
	150	25.4 × 15	0.20	0.73	EKLM181VSN151MQ15S
	180	25.4 × 15	0.20	0.79	EKLM181VSN181MQ15S
	220	30 × 15	0.20	0.86	EKLM181VSN221MR15S
200	270	30 × 15	0.20	0.96	EKLM181VSN271MR15S
	330	35 × 15	0.20	1.10	EKLM181VSN331MA15S
	390	35 × 15	0.20	1.17	EKLM181VSN391MA15S
200	120	22 × 15	0.20	0.61	EKLM201VSN121MP15S
	150	25.4 × 15	0.20	0.73	EKLM201VSN151MQ15S
	180	30 × 15	0.20	0.79	EKLM201VSN181MR15S

WV (V _{dc})	Cap (µF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
200	220	30 × 15	0.20	0.90	EKLM201VSN221MR15S
	270	35 × 15	0.20	1.00	EKLM201VSN271MA15S
	330	35 × 15	0.20	1.07	EKLM201VSN331MA15S
	82	22 × 15	0.20	0.50	EKLM251VSN820MP15S
250	100	25.4 × 15	0.20	0.59	EKLM251VSN101MQ15S
	120	25.4 × 15	0.20	0.65	EKLM251VSN121MQ15S
	150	30 × 15	0.20	0.71	EKLM251VSN151MR15S
	180	30 × 15	0.20	0.79	EKLM251VSN181MR15S
	220	35 × 15	0.20	0.90	EKLM251VSN221MA15S
400	39	22 × 15	0.20	0.35	EKLM401VSN390MP15S
	47	25.4 × 15	0.20	0.40	EKLM401VSN470MQ15S
	56	25.4 × 15	0.20	0.44	EKLM401VSN560MQ15S
	68	30 × 15	0.20	0.46	EKLM401VSN680MR15S
	82	30 × 15	0.20	0.51	EKLM401VSN820MR15S
	100	35 × 15	0.20	0.56	EKLM401VSN101MA15S
	120	35 × 15	0.20	0.62	EKLM401VSN121MA15S

◆ RATED RIPPLE CURRENT MULTIPLIERS


- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXM Series

- Endurance with ripple current : 7,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆SPECIFICATIONS


Items	Characteristics		
Category	-25 to +105°C		
Temperature Range	-25 to +105°C		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	I ≤ 3·C/V Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 7,000 hours at 105°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤250% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

◆DIMENSIONS [mm]

●Terminal Code : VS (φ22 to φ35) : Standard

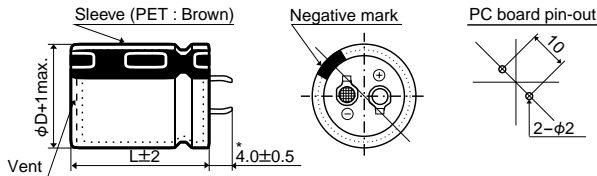


●Terminal Code : LI (φ35)

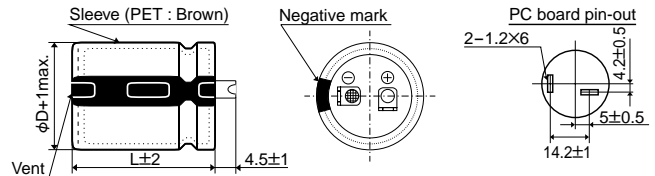

*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

◆PART NUMBERING SYSTEM

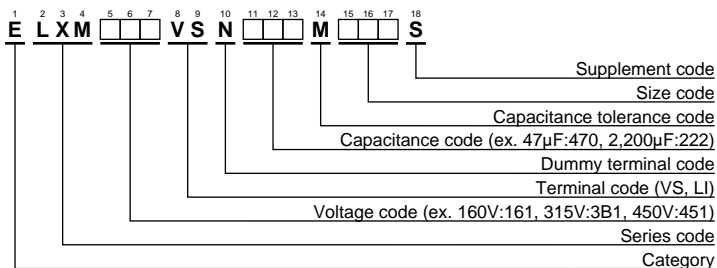

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	330	22×25	0.15	1.11	ELXM161VSN331MP25S	220	220	22×25	0.15	0.90	ELXM221VSN221MP25S
	390	22×30	0.15	1.26	ELXM161VSN391MP30S		270	22×30	0.15	1.05	ELXM221VSN271MP30S
	470	22×30	0.15	1.39	ELXM161VSN471MP30S		330	22×35	0.15	1.19	ELXM221VSN331MP35S
	470	25.4×25	0.15	1.38	ELXM161VSN471MQ25S		330	25.4×25	0.15	1.16	ELXM221VSN331MQ25S
	560	22×35	0.15	1.55	ELXM161VSN561MP35S		390	22×40	0.15	1.33	ELXM221VSN391MP40S
	560	25.4×30	0.15	1.55	ELXM161VSN561MQ30S		390	25.4×30	0.15	1.29	ELXM221VSN391MQ30S
	680	22×40	0.15	1.75	ELXM161VSN681MP40S		470	22×45	0.15	1.49	ELXM221VSN471MP45S
	680	25.4×35	0.15	1.78	ELXM161VSN681MQ35S		470	25.4×35	0.15	1.48	ELXM221VSN471MQ35S
	680	30×25	0.15	1.74	ELXM161VSN681MR25S		470	30×25	0.15	1.45	ELXM221VSN471MR25S
	820	22×50	0.15	1.97	ELXM161VSN821MP50S		560	22×50	0.15	1.63	ELXM221VSN561MP50S
	820	25.4×40	0.15	2.01	ELXM161VSN821MQ40S		560	25.4×40	0.15	1.71	ELXM221VSN561MQ40S
	820	30×30	0.15	1.96	ELXM161VSN821MR30S		560	30×30	0.15	1.62	ELXM221VSN561MR30S
	1,000	25.4×45	0.15	2.27	ELXM161VSN102MQ45S		680	25.4×45	0.15	1.87	ELXM221VSN681MQ45S
	1,000	30×35	0.15	2.26	ELXM161VSN102MR35S		680	30×35	0.15	1.86	ELXM221VSN681MR35S
	1,200	25.4×50	0.15	2.54	ELXM161VSN122MQ50S		820	25.4×50	0.15	2.10	ELXM221VSN821MQ50S
	1,200	30×40	0.15	2.56	ELXM161VSN122MR40S		820	30×40	0.15	2.12	ELXM221VSN821MR40S
	1,200	35×30	0.15	2.52	ELXM161VSN122MA30S		820	35×30	0.15	2.08	ELXM221VSN821MA30S
	1,500	30×45	0.15	2.96	ELXM161VSN152MR45S		1,000	30×50	0.15	2.48	ELXM221VSN102MR50S
	1,500	35×35	0.15	2.89	ELXM161VSN152MA35S		1,000	35×40	0.15	2.46	ELXM221VSN102MA40S
	1,800	30×50	0.15	3.32	ELXM161VSN182MR50S		1,200	35×45	0.15	2.78	ELXM221VSN122MA45S
1,800	35×40	0.15	3.30	ELXM161VSN182MA40S	1,500	35×50	0.15	3.20	ELXM221VSN152MA50S		
2,200	35×50	0.15	3.87	ELXM161VSN222MA50S	250	180	22×25	0.15	0.82	ELXM251VSN181MP25S	
180	270	22×25	0.15	1.00		ELXM181VSN271MP25S	220	22×30	0.15	0.95	ELXM251VSN221MP30S
	330	22×30	0.15	1.16		ELXM181VSN331MP30S	270	22×35	0.15	1.08	ELXM251VSN271MP35S
	390	22×30	0.15	1.26		ELXM181VSN391MP30S	270	25.4×25	0.15	1.05	ELXM251VSN271MQ25S
	390	25.4×25	0.15	1.26		ELXM181VSN391MQ25S	330	22×40	0.15	1.22	ELXM251VSN331MP40S
	470	22×35	0.15	1.42		ELXM181VSN471MP35S	330	25.4×30	0.15	1.19	ELXM251VSN331MQ30S
	470	25.4×30	0.15	1.42		ELXM181VSN471MQ30S	390	22×45	0.15	1.36	ELXM251VSN391MP45S
	560	22×40	0.15	1.59		ELXM181VSN561MP40S	390	25.4×35	0.15	1.35	ELXM251VSN391MQ35S
	560	25.4×30	0.15	1.55		ELXM181VSN561MQ30S	390	30×25	0.15	1.32	ELXM251VSN391MR25S
	560	30×25	0.15	1.58		ELXM181VSN561MR25S	470	22×50	0.15	1.49	ELXM251VSN471MP50S
	680	22×45	0.15	1.79		ELXM181VSN681MP45S	470	25.4×40	0.15	1.52	ELXM251VSN471MQ40S
	680	25.4×35	0.15	1.78		ELXM181VSN681MQ35S	470	30×30	0.15	1.49	ELXM251VSN471MR30S
	680	30×30	0.15	1.79		ELXM181VSN681MR30S	560	25.4×45	0.15	1.70	ELXM251VSN561MP45S
	820	25.4×40	0.15	2.01		ELXM181VSN821MQ40S	560	30×35	0.15	1.69	ELXM251VSN561MR35S
	820	30×35	0.15	2.04		ELXM181VSN821MR35S	680	25.4×50	0.15	1.91	ELXM251VSN681MQ50S
	1,000	25.4×50	0.15	2.32		ELXM181VSN102MQ50S	680	30×40	0.15	1.93	ELXM251VSN681MR40S
	1,000	30×35	0.15	2.26		ELXM181VSN102MR35S	680	35×30	0.15	1.90	ELXM251VSN681MA30S
	1,000	35×30	0.15	2.30		ELXM181VSN102MA30S	820	30×45	0.15	2.19	ELXM251VSN821MR45S
	1,200	30×45	0.15	2.65		ELXM181VSN122MR45S	820	35×35	0.15	2.13	ELXM251VSN821MA35S
	1,200	35×35	0.15	2.58		ELXM181VSN122MA35S	1,000	35×40	0.15	2.46	ELXM251VSN102MA40S
	1,500	30×50	0.15	3.03	ELXM181VSN152MR50S	1,200	35×50	0.15	2.86	ELXM251VSN122MA50S	
1,500	35×40	0.15	3.01	ELXM181VSN152MA40S	315	100	22×25	0.15	0.67	ELXM3B1VSN101MP25S	
1,800	35×45	0.15	3.41	ELXM181VSN182MA45S		120	22×30	0.15	0.77	ELXM3B1VSN121MP30S	
2,200	35×50	0.15	3.87	ELXM181VSN222MA50S		150	22×30	0.15	0.86	ELXM3B1VSN151MP30S	
200	220	22×25	0.15	0.90		ELXM201VSN221MP25S	150	25.4×25	0.15	0.85	ELXM3B1VSN151MQ25S
	270	22×30	0.15	1.05		ELXM201VSN271MP30S	180	22×35	0.15	0.96	ELXM3B1VSN181MP35S
	330	22×30	0.15	1.16		ELXM201VSN331MP30S	180	25.4×30	0.15	0.96	ELXM3B1VSN181MQ30S
	330	25.4×25	0.15	1.16		ELXM201VSN331MQ25S	220	22×40	0.15	1.09	ELXM3B1VSN221MP40S
	390	22×35	0.15	1.29		ELXM201VSN391MP35S	220	25.4×30	0.15	1.06	ELXM3B1VSN221MQ30S
	390	25.4×30	0.15	1.29		ELXM201VSN391MQ30S	220	30×25	0.15	1.08	ELXM3B1VSN221MR25S
	470	22×40	0.15	1.46		ELXM201VSN471MP40S	270	22×45	0.15	1.24	ELXM3B1VSN271MP45S
	470	25.4×30	0.15	1.42		ELXM201VSN471MQ30S	270	25.4×35	0.15	1.23	ELXM3B1VSN271MQ35S
	470	30×25	0.15	1.45		ELXM201VSN471MR25S	270	30×30	0.15	1.23	ELXM3B1VSN271MR30S
	560	22×45	0.15	1.63		ELXM201VSN561MP45S	330	25.4×40	0.15	1.40	ELXM3B1VSN331MQ40S
	560	25.4×35	0.15	1.62		ELXM201VSN561MQ35S	330	30×35	0.15	1.42	ELXM3B1VSN331MR35S
	560	30×30	0.15	1.62		ELXM201VSN561MR30S	330	35×30	0.15	1.45	ELXM3B1VSN331MA30S
	680	25.4×40	0.15	1.83		ELXM201VSN681MQ40S	390	25.4×50	0.15	1.59	ELXM3B1VSN391MQ50S
	680	30×30	0.15	1.79		ELXM201VSN681MR30S	390	30×35	0.15	1.54	ELXM3B1VSN391MR35S
	820	25.4×45	0.15	2.06		ELXM201VSN821MQ45S	390	35×30	0.15	1.57	ELXM3B1VSN391MA30S
	820	30×35	0.15	2.04		ELXM201VSN821MR35S	470	30×45	0.15	1.81	ELXM3B1VSN471MR45S
	1,000	30×45	0.15	2.42		ELXM201VSN102MR45S	470	35×35	0.15	1.77	ELXM3B1VSN471MA35S
	1,000	35×30	0.15	2.30	ELXM201VSN102MA30S	560	30×50	0.15	2.03	ELXM3B1VSN561MR50S	
	1,200	30×50	0.15	2.71	ELXM201VSN122MR50S	560	35×40	0.15	2.02	ELXM3B1VSN561MA40S	
	1,200	35×40	0.15	2.70	ELXM201VSN122MA40S	680	35×45	0.15	2.29	ELXM3B1VSN681MA45S	
1,500	35×45	0.15	3.11	ELXM201VSN152MA45S	820	35×50	0.15	2.59	ELXM3B1VSN821MA50S		
1,800	35×50	0.15	3.50	ELXM201VSN182MA50S							

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C, 120Hz)	Part No.
350	100	22×25	0.15	0.67	ELXM351VSN101MP25S	420	56	22×25	0.20	0.50	ELXM421VSN560MP25S
	120	22×30	0.15	0.77	ELXM351VSN121MP30S		68	22×30	0.20	0.58	ELXM421VSN680MP30S
	120	25.4×25	0.15	0.76	ELXM351VSN121MQ25S		82	22×30	0.20	0.63	ELXM421VSN820MP30S
	150	22×35	0.15	0.88	ELXM351VSN151MP35S		82	25.4×25	0.20	0.63	ELXM421VSN820MQ25S
	150	25.4×30	0.15	0.88	ELXM351VSN151MQ30S		100	22×35	0.20	0.72	ELXM421VSN101MP35S
	180	22×40	0.15	0.99	ELXM351VSN181MP40S		100	25.4×30	0.20	0.72	ELXM421VSN101MQ30S
	180	25.4×30	0.15	0.96	ELXM351VSN181MQ30S		120	22×40	0.20	0.81	ELXM421VSN121MP40S
	180	30×25	0.15	0.98	ELXM351VSN181MR25S		120	25.4×30	0.20	0.79	ELXM421VSN121MQ30S
	220	22×45	0.15	1.12	ELXM351VSN221MP45S		120	30×25	0.20	0.80	ELXM421VSN121MR25S
	220	25.4×35	0.15	1.11	ELXM351VSN231MQ35S		150	22×45	0.20	0.92	ELXM421VSN151MR45S
	220	30×30	0.15	1.11	ELXM351VSN221MR30S		150	25.4×35	0.20	0.92	ELXM421VSN151MQ35S
	270	25.4×40	0.15	1.26	ELXM351VSN271MQ40S		150	30×30	0.20	0.92	ELXM421VSN151MR30S
	270	30×35	0.15	1.28	ELXM351VSN271MR35S		180	25.4×40	0.20	1.03	ELXM421VSN181MQ40S
	330	25.4×45	0.15	1.40	ELXM351VSN331MQ45S		180	30×35	0.20	1.05	ELXM421VSN181MR35S
	330	30×35	0.15	1.42	ELXM351VSN331MR35S		220	25.4×50	0.20	1.19	ELXM421VSN221MQ50S
	330	35×30	0.15	1.45	ELXM351VSN331MA30S		220	30×35	0.20	1.16	ELXM421VSN221MR35S
	390	30×40	0.15	1.60	ELXM351VSN391MR40S		220	35×30	0.20	1.18	ELXM421VSN221MA30S
	390	35×35	0.15	1.61	ELXM351VSN391MA35S		270	30×45	0.20	1.38	ELXM421VSN271MR45S
	470	30×50	0.15	1.86	ELXM351VSN471MR50S		270	35×35	0.20	1.34	ELXM421VSN271MA35S
	470	35×40	0.15	1.85	ELXM351VSN471MA40S		330	30×50	0.20	1.56	ELXM421VSN331MR50S
560	35×40	0.15	2.02	ELXM351VSN561MA40S	330	35×40	0.20	1.55	ELXM421VSN331MA40S		
680	35×50	0.15	2.36	ELXM351VSN681MA50S	390	35×45	0.20	1.74	ELXM421VSN391MA45S		
400	68	22×25	0.15	0.55	ELXM401VSN680MP25S	470	35×50	0.20	1.96	ELXM421VSN471MA50S	
	82	22×30	0.15	0.63	ELXM401VSN820MP30S	450	47	22×25	0.20	0.46	ELXM451VSN470MP25S
	100	22×30	0.15	0.70	ELXM401VSN101MP30S		56	22×30	0.20	0.52	ELXM451VSN560MP30S
	100	25.4×25	0.15	0.70	ELXM401VSN101MQ25S		68	22×30	0.20	0.58	ELXM451VSN680MP30S
	120	22×35	0.15	0.79	ELXM401VSN121MP35S		68	25.4×25	0.20	0.58	ELXM451VSN680MQ25S
	120	25.4×30	0.15	0.79	ELXM401VSN121MQ30S		82	22×35	0.20	0.65	ELXM451VSN820MP35S
	150	22×40	0.15	0.90	ELXM401VSN151MP40S		82	25.4×30	0.20	0.65	ELXM451VSN820MQ30S
	150	25.4×30	0.15	0.88	ELXM401VSN151MQ30S		100	22×40	0.20	0.74	ELXM451VSN101MP40S
	150	30×25	0.15	0.90	ELXM401VSN151MR25S		100	25.4×30	0.20	0.72	ELXM451VSN101MQ30S
	180	22×45	0.15	0.99	ELXM401VSN181MP45S		100	30×25	0.20	0.73	ELXM451VSN101MR25S
	180	25.4×35	0.15	1.01	ELXM401VSN181MQ35S		120	22×45	0.20	0.83	ELXM451VSN121MP45S
	180	30×30	0.15	1.01	ELXM401VSN181MR30S		120	25.4×35	0.20	0.82	ELXM451VSN121MQ35S
	220	25.4×40	0.15	1.14	ELXM401VSN221MQ40S		120	30×30	0.20	0.82	ELXM451VSN121MR30S
	220	30×35	0.15	1.16	ELXM401VSN221MR35S		150	25.4×40	0.20	0.94	ELXM451VSN151MQ40S
	270	25.4×50	0.15	1.32	ELXM401VSN271MQ50S		150	30×35	0.20	0.96	ELXM451VSN151MR35S
	270	30×40	0.15	1.33	ELXM401VSN271MR40S		180	25.4×45	0.20	1.06	ELXM451VSN181MQ45S
	270	35×30	0.15	1.31	ELXM401VSN271MA30S		180	30×35	0.20	1.05	ELXM451VSN181MR35S
	330	30×45	0.15	1.52	ELXM401VSN331MR45S		180	35×30	0.20	1.07	ELXM451VSN181MA30S
	330	35×35	0.15	1.48	ELXM401VSN331MA35S		220	30×40	0.20	1.20	ELXM451VSN221MR40S
	390	30×50	0.15	1.69	ELXM401VSN391MR50S		220	35×35	0.20	1.21	ELXM451VSN221MA35S
390	35×40	0.15	1.68	ELXM401VSN391MA40S	270		30×50	0.20	1.41	ELXM451VSN271MR50S	
470	35×45	0.15	1.91	ELXM401VSN471MA45S	270	35×40	0.20	1.40	ELXM451VSN271MA40S		
560	35×50	0.15	2.14	ELXM401VSN561MA50S	330	35×45	0.20	1.60	ELXM451VSN331MA45S		
					390	35×50	0.20	1.79	ELXM451VSN391MA50S		

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXQ Series

- Endurance with ripple current : 5,000 hours at 105°C
- Downsized and higher ripple version of LXG series
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS


Items	Characteristics		
Category	Temperature Range		
Temperature Range	-25 to +105°C		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105°C.		
	Capacitance change	≤ ±20% of the initial value	
	D.F. (tanδ)	≤ 200% of the initial specified value	
	Leakage current	≤ The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤ ±15% of the initial value	
	D.F. (tanδ)	≤ 150% of the initial specified value	
	Leakage current	≤ The initial specified value	

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

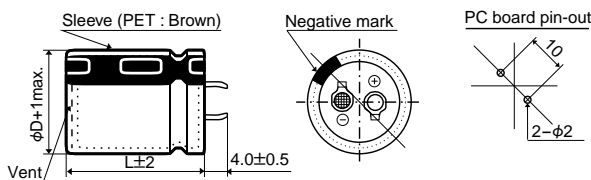


● Terminal Code : LI (φ30, φ35)

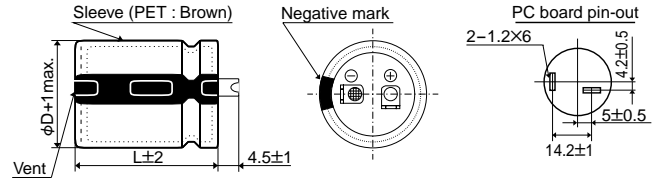

No plastic disk is the standard design

◆ PART NUMBERING SYSTEM

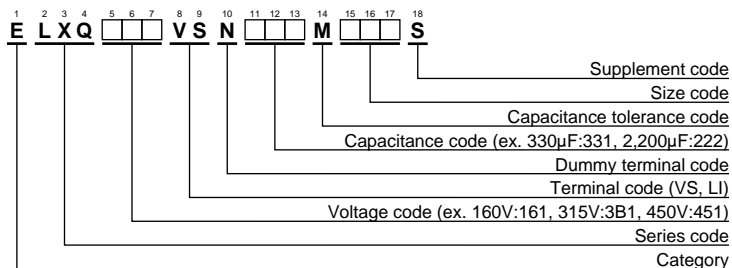

Please refer to "A guide to global code (snap-in type)"



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	
160	390	22×25	0.15	1.32	ELXQ161VSN391MP25S	200	1,200	30×50	0.15	2.88	ELXQ201VSN122MR50S	
	560	22×30	0.15	1.66	ELXQ161VSN561MP30S		1,200	35×35	0.15	2.88	ELXQ201VSN122MA35S	
	560	25.4×25	0.15	1.68	ELXQ161VSN561MQ25S		1,500	35×40	0.15	3.34	ELXQ201VSN152MA40S	
	680	22×35	0.15	1.87	ELXQ161VSN681MP35S		1,800	35×45	0.15	3.74	ELXQ201VSN182MA45S	
	680	25.4×30	0.15	1.88	ELXQ161VSN681MQ30S		1,800	35×50	0.15	3.82	ELXQ201VSN182MA50S	
	680	30×25	0.15	1.96	ELXQ161VSN681MR25S		220	270	22×25	0.15	1.10	ELXQ221VSN271MP25S
	820	22×40	0.15	2.09	ELXQ161VSN821MP40S			330	22×30	0.15	1.19	ELXQ221VSN331MP30S
	1,000	22×45	0.15	2.36	ELXQ161VSN102MP45S			390	25.4×25	0.15	1.39	ELXQ221VSN391MQ25S
	1,000	22×50	0.15	2.41	ELXQ161VSN102MP50S			470	22×35	0.15	1.55	ELXQ221VSN471MP35S
	1,000	25.4×35	0.15	2.38	ELXQ161VSN102MQ35S			470	25.4×30	0.15	1.56	ELXQ221VSN471MQ30S
	1,000	30×30	0.15	2.40	ELXQ161VSN102MR30S			470	30×25	0.15	1.63	ELXQ221VSN471MR25S
	1,000	35×25	0.15	2.55	ELXQ161VSN102MA25S			560	22×40	0.15	1.73	ELXQ221VSN561MP40S
	1,200	25.4×40	0.15	2.66	ELXQ161VSN122MQ40S			560	30×30	0.15	1.79	ELXQ221VSN561MR30S
	1,200	25.4×45	0.15	2.71	ELXQ161VSN122MQ45S			680	22×45	0.15	1.94	ELXQ221VSN681MP45S
	1,200	30×35	0.15	2.69	ELXQ161VSN122MR35S			680	22×50	0.15	1.99	ELXQ221VSN681MP50S
	1,200	30×40	0.15	2.77	ELXQ161VSN122MR40S			680	25.4×35	0.15	1.96	ELXQ221VSN681MQ35S
	1,200	35×30	0.15	2.86	ELXQ161VSN122MA30S			680	30×35	0.15	2.02	ELXQ221VSN681MR35S
	1,500	25.4×50	0.15	3.08	ELXQ161VSN152MQ50S			680	35×25	0.15	2.10	ELXQ221VSN681MA25S
	1,500	30×45	0.15	3.17	ELXQ161VSN152MR45S			820	25.4×40	0.15	2.20	ELXQ221VSN821MQ40S
	1,500	35×35	0.15	3.22	ELXQ161VSN152MA35S			820	25.4×45	0.15	2.24	ELXQ221VSN821MQ45S
1,800	30×50	0.15	3.53	ELXQ161VSN182MR50S	820	30×40		0.15	2.29	ELXQ221VSN821MR40S		
1,800	35×40	0.15	3.66	ELXQ161VSN182MA40S	820	35×30		0.15	2.36	ELXQ221VSN821MA30S		
2,200	35×45	0.15	4.14	ELXQ161VSN222MA45S	1,000	25.4×50		0.15	2.51	ELXQ221VSN102MQ50S		
2,700	35×50	0.15	4.68	ELXQ161VSN272MA50S	1,000	30×45		0.15	2.59	ELXQ221VSN102MR45S		
180	330	22×25	0.15	1.21	ELXQ181VSN331MP25S	1,000		35×35	0.15	2.63	ELXQ221VSN102MA35S	
	470	22×30	0.15	1.52	ELXQ181VSN471MP30S	1,200	30×50	0.15	2.88	ELXQ221VSN122MR50S		
	470	25.4×25	0.15	1.52	ELXQ181VSN471MQ25S	1,200	35×40	0.15	2.98	ELXQ221VSN122MA40S		
	560	22×35	0.15	1.70	ELXQ181VSN561MP35S	1,500	35×45	0.15	3.41	ELXQ221VSN152MA45S		
	560	30×25	0.15	1.78	ELXQ181VSN561MR25S	1,800	35×50	0.15	3.82	ELXQ221VSN182MA50S		
	680	22×40	0.15	1.91	ELXQ181VSN681MP40S	250	220	22×25	0.15	1.01	ELXQ251VSN221MP25S	
	680	25.4×30	0.15	1.88	ELXQ181VSN681MQ30S		270	22×30	0.15	1.20	ELXQ251VSN271MP30S	
	820	22×45	0.15	1.99	ELXQ181VSN821MP45S		330	25.4×25	0.15	1.32	ELXQ251VSN331MQ25S	
	820	25.4×35	0.15	2.16	ELXQ181VSN821MQ35S		390	22×35	0.15	1.44	ELXQ251VSN391MP35S	
	820	30×30	0.15	2.17	ELXQ181VSN821MP30S		390	25.4×30	0.15	1.43	ELXQ251VSN391MQ30S	
	820	35×25	0.15	2.31	ELXQ181VSN821MA25S		390	30×25	0.15	1.51	ELXQ251VSN391MR25S	
	1,000	22×50	0.15	2.25	ELXQ181VSN102MP50S		470	22×40	0.15	1.62	ELXQ251VSN471MP40S	
	1,000	25.4×40	0.15	2.43	ELXQ181VSN102MQ40S		560	22×45	0.15	1.80	ELXQ251VSN561MP45S	
	1,000	25.4×45	0.15	2.47	ELXQ181VSN102MQ45S		560	22×50	0.15	1.84	ELXQ251VSN561MP50S	
	1,000	30×35	0.15	2.46	ELXQ181VSN102MR35S		560	25.4×35	0.15	1.78	ELXQ251VSN561MQ35S	
	1,200	25.4×50	0.15	2.75	ELXQ181VSN122MQ50S		560	30×30	0.15	1.83	ELXQ251VSN561MR30S	
	1,200	30×40	0.15	2.77	ELXQ181VSN122MR40S		560	35×25	0.15	1.91	ELXQ251VSN561MA25S	
	1,200	35×30	0.15	2.86	ELXQ181VSN122MA30S		680	25.4×40	0.15	2.00	ELXQ251VSN681MQ40S	
	1,500	30×45	0.15	3.17	ELXQ181VSN152MR45S		680	25.4×45	0.15	2.04	ELXQ251VSN681MQ45S	
	1,500	30×50	0.15	3.22	ELXQ181VSN152MR50S		680	30×35	0.15	2.06	ELXQ251VSN681MR35S	
1,500	35×35	0.15	3.22	ELXQ181VSN152MA35S	680		35×30	0.15	2.15	ELXQ251VSN681MA30S		
1,800	35×40	0.15	3.66	ELXQ181VSN182MA40S	820		25.4×50	0.15	2.28	ELXQ251VSN821MQ50S		
1,800	35×45	0.15	3.74	ELXQ181VSN182MA45S	820		30×40	0.15	2.33	ELXQ251VSN821MR40S		
2,200	35×50	0.15	4.22	ELXQ181VSN222MA50S	820		30×45	0.15	2.39	ELXQ251VSN821MR45S		
200	270	22×25	0.15	1.10	ELXQ201VSN271MP25S		820	35×35	0.15	2.38	ELXQ251VSN821MA35S	
	390	22×30	0.15	1.38	ELXQ201VSN391MP30S	1,000	30×50	0.15	2.68	ELXQ251VSN102MR50S		
	390	25.4×25	0.15	1.39	ELXQ201VSN391MQ25S	1,000	35×40	0.15	2.72	ELXQ251VSN102MA40S		
	470	22×35	0.15	1.55	ELXQ201VSN471MP35S	1,200	35×45	0.15	3.05	ELXQ251VSN122MA45S		
	560	22×40	0.15	1.73	ELXQ201VSN561MP40S	1,500	35×50	0.15	3.49	ELXQ251VSN152MA50S		
	560	25.4×30	0.15	1.71	ELXQ201VSN561MQ30S	315	150	22×25	0.15	0.80	ELXQ3B1VSN151MP25S	
	560	30×25	0.15	1.78	ELXQ201VSN561MR25S		180	22×30	0.15	0.92	ELXQ3B1VSN181MP30S	
	680	22×45	0.15	1.81	ELXQ201VSN681MP45S		180	25.4×25	0.15	0.94	ELXQ3B1VSN181MQ25S	
	680	25.4×35	0.15	1.87	ELXQ201VSN681MQ35S		220	22×35	0.15	1.04	ELXQ3B1VSN221MP35S	
	680	30×30	0.15	1.98	ELXQ201VSN681MR30S		220	30×25	0.15	1.17	ELXQ3B1VSN221MR25S	
	680	35×25	0.15	2.10	ELXQ201VSN681MA25S		270	22×40	0.15	1.18	ELXQ3B1VSN271MP40S	
	820	22×50	0.15	2.18	ELXQ201VSN821MP50S		270	25.4×30	0.15	1.19	ELXQ3B1VSN271MQ30S	
	820	25.4×40	0.15	2.09	ELXQ201VSN821MQ40S		330	22×45	0.15	1.33	ELXQ3B1VSN331MP45S	
	820	30×35	0.15	2.22	ELXQ201VSN821MR35S		330	25.4×35	0.15	1.37	ELXQ3B1VSN331MQ35S	
	1,000	25.4×45	0.15	2.35	ELXQ201VSN102MQ45S		330	30×30	0.15	1.40	ELXQ3B1VSN331MR30S	
	1,000	25.4×50	0.15	2.39	ELXQ201VSN102MQ50S		330	35×25	0.15	1.49	ELXQ3B1VSN331MA25S	
	1,000	30×40	0.15	2.53	ELXQ201VSN102MR40S		390	22×50	0.15	1.48	ELXQ3B1VSN391MP50S	
	1,000	35×30	0.15	2.61	ELXQ201VSN102MA30S		390	25.4×40	0.15	1.52	ELXQ3B1VSN391MQ40S	
	1,200	30×45	0.15	2.84	ELXQ201VSN122MR45S		470	25.4×45	0.15	1.70	ELXQ3B1VSN471MQ45S	



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	
315	470	30×35	0.15	1.71	ELXQ3B1VSN471MR35S	400	470	30×45	0.15	1.81	ELXQ401VSN471MR45S	
	470	35×30	0.15	1.82	ELXQ3B1VSN471MA30S		470	30×50	0.15	1.84	ELXQ401VSN471MR50S	
	560	25.4×50	0.15	1.88	ELXQ3B1VSN561MQ50S		470	35×40	0.15	1.90	ELXQ401VSN471MA40S	
	560	30×40	0.15	1.92	ELXQ3B1VSN561MR40S		560	35×45	0.15	2.12	ELXQ401VSN561MA45S	
	560	30×45	0.15	1.97	ELXQ3B1VSN561MR45S		680	35×50	0.15	2.39	ELXQ401VSN681MA50S	
	560	35×35	0.15	2.00	ELXQ3B1VSN561MA35S		420	100	22×25	0.20	0.66	ELXQ421VSN101MP25S
	680	30×50	0.15	2.21	ELXQ3B1VSN681MR50S			120	22×30	0.20	0.75	ELXQ421VSN121MP30S
	680	35×40	0.15	2.29	ELXQ3B1VSN681MA40S			120	25.4×25	0.20	0.77	ELXQ421VSN121MQ25S
	820	35×45	0.15	2.57	ELXQ3B1VSN821MA45S			150	22×35	0.20	0.86	ELXQ421VSN151MP35S
1,000	35×50	0.15	2.89	ELXQ3B1VSN1021MA50S	180	22×40		0.20	0.96	ELXQ421VSN181MP40S		
350	120	22×25	0.15	0.72	ELXQ351VSN121MP25S	180		22×45	0.20	0.98	ELXQ421VSN181MP45S	
	150	22×30	0.15	0.84	ELXQ351VSN151MP30S	180		25.4×30	0.20	0.97	ELXQ421VSN181MQ30S	
	180	25.4×25	0.15	0.94	ELXQ351VSN181MQ25S	180		25.4×35	0.20	1.01	ELXQ421VSN181MQ35S	
	220	22×35	0.15	1.04	ELXQ351VSN221MP35S	180		30×25	0.20	1.02	ELXQ421VSN181MQ25S	
	220	22×40	0.15	1.06	ELXQ351VSN221MP40S	220		22×50	0.20	1.11	ELXQ421VSN221MP50S	
	220	25.4×30	0.15	1.07	ELXQ351VSN221MQ30S	220		25.4×40	0.20	1.14	ELXQ421VSN221MQ40S	
	220	30×25	0.15	1.13	ELXQ351VSN221MR25S	220		30×30	0.20	1.14	ELXQ421VSN221MR30S	
	270	22×45	0.15	1.20	ELXQ351VSN271MP45S	220		35×25	0.20	1.22	ELXQ421VSN221MA25S	
	270	25.4×35	0.15	1.24	ELXQ351VSN271MQ35S	270		25.4×45	0.20	1.29	ELXQ421VSN271MQ45S	
	270	30×30	0.15	1.27	ELXQ351VSN271MR30S	270		30×35	0.20	1.30	ELXQ421VSN271MR35S	
	270	35×25	0.15	1.35	ELXQ351VSN271MA25S	270		35×30	0.20	1.38	ELXQ421VSN271MA30S	
	330	22×50	0.15	1.36	ELXQ351VSN331MP50S	330		25.4×50	0.20	1.44	ELXQ421VSN331MQ50S	
	330	25.4×40	0.15	1.39	ELXQ351VSN331MQ40S	330		30×40	0.20	1.48	ELXQ421VSN331MR40S	
	330	30×35	0.15	1.43	ELXQ351VSN331MR35S	330		35×35	0.20	1.54	ELXQ421VSN331MA35S	
	390	25.4×45	0.15	1.55	ELXQ351VSN391MQ45S	390		30×45	0.20	1.64	ELXQ421VSN391MR45S	
	390	30×40	0.15	1.60	ELXQ351VSN391MR40S	390		35×40	0.20	1.73	ELXQ421VSN391MA40S	
	390	35×30	0.15	1.66	ELXQ351VSN391MA30S	470	30×50	0.20	1.84	ELXQ421VSN471MR50S		
	470	25.4×50	0.15	1.72	ELXQ351VSN471MQ50S	470	35×45	0.20	1.94	ELXQ421VSN471MA45S		
	470	30×45	0.15	1.81	ELXQ351VSN471MR45S	560	35×50	0.20	2.17	ELXQ421VSN561MA50S		
	470	35×35	0.15	1.83	ELXQ351VSN471MA35S	450	82	22×25	0.20	0.59	ELXQ451VSN820MP25S	
	560	30×50	0.15	2.00	ELXQ351VSN561MR50S		100	22×30	0.20	0.69	ELXQ451VSN101MP30S	
560	35×40	0.15	2.07	ELXQ351VSN561MA40S	100		25.4×25	0.20	0.70	ELXQ451VSN101MQ25S		
680	35×45	0.15	2.34	ELXQ351VSN681MA45S	120		22×35	0.20	0.77	ELXQ451VSN121MP35S		
820	35×50	0.15	2.62	ELXQ351VSN821MA50S	150		22×40	0.20	0.88	ELXQ451VSN151MP40S		
400	100	22×25	0.15	0.66	ELXQ401VSN101MP25S		150	22×45	0.20	0.90	ELXQ451VSN151MP45S	
	120	22×30	0.15	0.75	ELXQ401VSN121MP30S		150	25.4×30	0.20	0.88	ELXQ451VSN151MQ30S	
	150	22×35	0.15	0.86	ELXQ401VSN151MP35S		150	25.4×35	0.20	0.92	ELXQ451VSN151MQ35S	
	150	25.4×25	0.15	0.86	ELXQ401VSN151MQ25S		150	30×25	0.20	0.93	ELXQ451VSN151MR25S	
	180	22×40	0.15	0.96	ELXQ401VSN181MP40S		180	22×50	0.20	1.01	ELXQ451VSN181MP50S	
	180	25.4×30	0.15	0.97	ELXQ401VSN181MQ30S		180	25.4×40	0.20	1.03	ELXQ451VSN181MQ40S	
	180	30×25	0.15	1.02	ELXQ401VSN181MR25S		180	30×30	0.20	1.03	ELXQ451VSN181MR30S	
	220	22×45	0.15	1.09	ELXQ401VSN221MP45S		180	35×25	0.20	1.10	ELXQ451VSN181MA25S	
	220	25.4×35	0.15	1.12	ELXQ401VSN221MQ35S		220	25.4×45	0.20	1.16	ELXQ451VSN221MQ45S	
	220	35×25	0.15	1.22	ELXQ401VSN221MA25S		220	30×35	0.20	1.17	ELXQ451VSN221MR35S	
	270	22×50	0.15	1.23	ELXQ401VSN271MP50S		220	35×30	0.20	1.24	ELXQ451VSN221MA30S	
	270	25.4×40	0.15	1.26	ELXQ401VSN271MQ40S		270	25.4×50	0.20	1.31	ELXQ451VSN271MQ50S	
	270	25.4×45	0.15	1.29	ELXQ401VSN271MQ45S		270	30×40	0.20	1.33	ELXQ451VSN271MR40S	
	270	30×30	0.15	1.27	ELXQ401VSN271MR30S		270	35×35	0.20	1.39	ELXQ451VSN271MA35S	
	330	25.4×50	0.15	1.44	ELXQ401VSN331MQ50S		330	30×45	0.20	1.51	ELXQ451VSN331MR45S	
	330	30×35	0.15	1.43	ELXQ401VSN331MR35S		390	30×50	0.20	1.67	ELXQ451VSN391MR50S	
	330	35×30	0.15	1.52	ELXQ401VSN331MA30S	390	35×40	0.20	1.73	ELXQ451VSN391MA40S		
	390	30×40	0.15	1.60	ELXQ401VSN391MR40S	390	35×45	0.20	1.77	ELXQ451VSN391MA45S		
	390	35×35	0.15	1.67	ELXQ401VSN391MA35S	470	35×50	0.20	1.98	ELXQ451VSN471MA50S		

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXG Series

- Endurance with ripple current : 5,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics
Category	
Temperature Range	-40 to +105°C
Rated Voltage Range	10 to 100V _{dc} (at 20°C, 120Hz)
Capacitance Tolerance	±20% (M)
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)
Dissipation Factor (tanδ)	Rated voltage (V _{dc}) 10V 16V 25V 35V 50V 63V 80 & 100V tanδ (Max.) 0.60 0.45 0.30 0.25 0.20 0.15 0.15 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Capacitance change : Capacitance at the lowest operating temperature shall not be less than 70% of the 20°C value. Rated voltage (V _{dc}) 10V 16V 25V 35V 50V 63V 80 & 100V Z(-25°C)/Z(+20°C) 4 4 3 3 2 2 2 Z(-40°C)/Z(+20°C) 15 15 10 8 6 6 5 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with rated ripple current is applied for 5,000 hours at 105°C. Capacitance change ≤±25% of the initial value D.F. (tanδ) ≤250% of the initial specified value Leakage current ≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Capacitance change ≤±20% of the initial value D.F. (tanδ) ≤150% of the initial specified value Leakage current ≤The initial specified value

◆DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35) : Standard

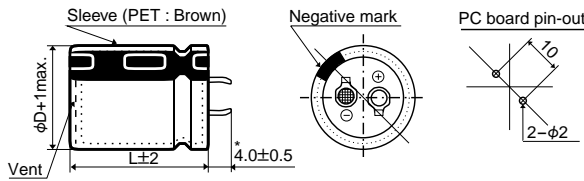


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

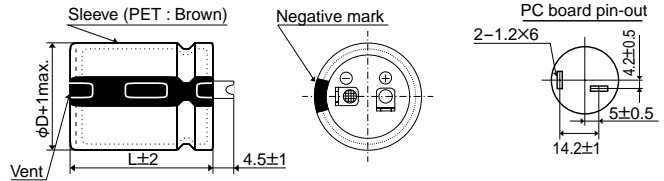

◆PART NUMBERING SYSTEM

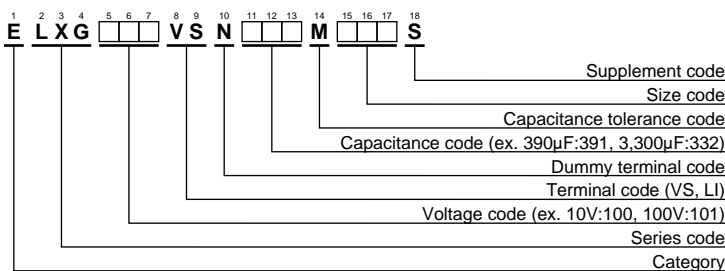

Please refer to "A guide to global code (snap-in type)"

◆RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
10 to 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100V _{dc}	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.



◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
10	6,800	22×25	0.60	1.30	ELXG100VSN682MP25S	35	5,600	25.4×35	0.25	1.98	ELXG350VSN562MQ35S
	10,000	22×30	0.60	1.65	ELXG100VSN103MP30S		5,600	30×30	0.25	1.98	ELXG350VSN562MR30S
	10,000	25.4×25	0.60	1.64	ELXG100VSN103MQ25S		5,600	35×25	0.25	2.03	ELXG350VSN562MA25S
	12,000	22×35	0.60	1.85	ELXG100VSN123MP35S		6,800	22×50	0.25	2.26	ELXG350VSN682MP50S
	12,000	25.4×30	0.60	1.85	ELXG100VSN123MQ30S		6,800	25.4×40	0.25	2.24	ELXG350VSN682MQ40S
	12,000	30×25	0.60	1.89	ELXG100VSN123MR25S		8,200	25.4×50	0.25	2.57	ELXG350VSN822MQ50S
	15,000	22×40	0.60	2.12	ELXG100VSN153MP40S		8,200	30×35	0.25	2.50	ELXG350VSN822MR35S
	15,000	25.4×35	0.60	2.16	ELXG100VSN153MQ35S		8,200	35×30	0.25	2.55	ELXG350VSN822MA30S
	18,000	22×50	0.60	2.45	ELXG100VSN183MP50S		10,000	30×40	0.25	2.86	ELXG350VSN103MR40S
	18,000	25.4×40	0.60	2.43	ELXG100VSN183MQ40S		10,000	35×35	0.25	2.88	ELXG350VSN103MA35S
	18,000	30×30	0.60	2.37	ELXG100VSN183MR30S		12,000	30×50	0.25	3.32	ELXG350VSN123MR50S
	18,000	35×25	0.60	2.42	ELXG100VSN183MA25S		12,000	35×40	0.25	3.30	ELXG350VSN123MA40S
	22,000	30×35	0.60	2.73	ELXG100VSN223MR35S		18,000	35×50	0.25	4.29	ELXG350VSN183MA50S
	22,000	35×30	0.60	2.79	ELXG100VSN223MA30S		1,500	22×25	0.20	1.02	ELXG500VSN102MP25S
	27,000	25.4×50	0.60	3.11	ELXG100VSN273MQ50S		1,800	22×30	0.20	1.17	ELXG500VSN182MP30S
	27,000	30×40	0.60	3.13	ELXG100VSN273MR40S		1,800	25.4×25	0.20	1.17	ELXG500VSN182MQ25S
	33,000	35×35	0.60	3.49	ELXG100VSN333MA35S		2,200	22×35	0.20	1.33	ELXG500VSN222MP35S
	39,000	30×50	0.60	3.99	ELXG100VSN393MR50S		2,700	22×40	0.20	1.51	ELXG500VSN272MP40S
	39,000	35×40	0.60	3.96	ELXG100VSN393MA40S		2,700	25.4×30	0.20	1.47	ELXG500VSN272MQ30S
	47,000	35×50	0.60	4.62	ELXG100VSN473MA50S		2,700	30×25	0.20	1.50	ELXG500VSN272MR25S
16	5,600	22×25	0.45	1.44	ELXG160VSN562MP25S	3,300	25.4×35	0.20	1.70	ELXG500VSN332MQ35S	
	6,800	22×30	0.45	1.66	ELXG160VSN682MP30S	3,300	30×30	0.20	1.70	ELXG500VSN332MR30S	
	6,800	25.4×25	0.45	1.66	ELXG160VSN682MQ25S	3,300	35×25	0.20	1.74	ELXG500VSN332MA25S	
	8,200	22×35	0.45	1.87	ELXG160VSN822MP35S	3,900	22×50	0.20	1.91	ELXG500VSN392MP50S	
	10,000	22×40	0.45	2.12	ELXG160VSN103MP40S	3,900	25.4×40	0.20	1.89	ELXG500VSN392MQ40S	
	10,000	25.4×30	0.45	2.07	ELXG160VSN103MQ30S	4,700	30×35	0.20	2.11	ELXG500VSN472MR35S	
	10,000	30×25	0.45	2.11	ELXG160VSN103MR25S	4,700	35×30	0.20	2.16	ELXG500VSN472MA30S	
	12,000	25.4×35	0.45	2.37	ELXG160VSN123MQ35S	5,600	25.4×50	0.20	2.38	ELXG500VSN562MQ50S	
	12,000	30×30	0.45	2.37	ELXG160VSN123MR30S	5,600	30×40	0.20	2.39	ELXG500VSN562MR40S	
	12,000	35×25	0.45	2.42	ELXG160VSN123MA25S	5,600	35×35	0.20	2.41	ELXG500VSN562MA35S	
	15,000	22×50	0.45	2.74	ELXG160VSN153MP50S	6,800	30×50	0.20	2.79	ELXG500VSN682MR50S	
	15,000	25.4×40	0.45	2.71	ELXG160VSN153MQ40S	6,800	35×40	0.20	2.78	ELXG500VSN682MA40S	
	18,000	25.4×50	0.45	3.11	ELXG160VSN183MQ50S	10,000	35×50	0.20	3.57	ELXG500VSN103MA50S	
	18,000	30×35	0.45	3.02	ELXG160VSN183MR35S	1,000	22×25	0.15	1.00	ELXG630VSN102MP25S	
	18,000	35×30	0.45	3.09	ELXG160VSN183MA30S	1,200	22×30	0.15	1.15	ELXG630VSN122MP30S	
	22,000	30×40	0.45	3.46	ELXG160VSN223MR40S	1,200	25.4×25	0.15	1.15	ELXG630VSN122MQ25S	
	22,000	35×35	0.45	3.49	ELXG160VSN223MA35S	1,500	22×35	0.15	1.32	ELXG630VSN152MP35S	
	27,000	30×50	0.45	4.07	ELXG160VSN273MR50S	1,800	22×40	0.15	1.49	ELXG630VSN182MP40S	
	27,000	35×40	0.45	4.04	ELXG160VSN273MA40S	1,800	25.4×30	0.15	1.45	ELXG630VSN182MQ30S	
	39,000	35×50	0.45	5.16	ELXG160VSN393MA50S	1,800	30×25	0.15	1.48	ELXG630VSN182MR25S	
25	3,900	22×25	0.30	1.31	ELXG250VSN392MP25S	2,200	25.4×35	0.15	1.67	ELXG630VSN222MQ35S	
	4,700	22×30	0.30	1.51	ELXG250VSN472MP30S	2,200	30×30	0.15	1.68	ELXG630VSN222MR30S	
	4,700	25.4×25	0.30	1.51	ELXG250VSN472MQ25S	2,200	35×25	0.15	1.71	ELXG630VSN222MA25S	
	5,600	22×35	0.30	1.70	ELXG250VSN562MP35S	2,700	22×50	0.15	1.92	ELXG630VSN272MP50S	
	6,800	22×40	0.30	1.92	ELXG250VSN682MP40S	2,700	25.4×40	0.15	1.90	ELXG630VSN272MQ40S	
	6,800	25.4×30	0.30	1.87	ELXG250VSN682MQ30S	2,700	30×35	0.15	1.93	ELXG630VSN272MR35S	
	6,800	30×25	0.30	1.90	ELXG250VSN682MR25S	3,300	25.4×50	0.15	2.20	ELXG630VSN332MQ50S	
	8,200	25.4×35	0.30	2.14	ELXG250VSN822MQ35S	3,300	35×30	0.15	2.18	ELXG630VSN332MA30S	
	8,200	30×30	0.30	2.15	ELXG250VSN822MR30S	3,900	30×40	0.15	2.41	ELXG630VSN392MR40S	
	8,200	35×25	0.30	2.19	ELXG250VSN822MA25S	3,900	35×35	0.15	2.43	ELXG630VSN392MA35S	
	10,000	22×50	0.30	2.45	ELXG250VSN103MP50S	4,700	30×50	0.15	2.80	ELXG630VSN472MR50S	
	10,000	25.4×40	0.30	2.43	ELXG250VSN103MQ40S	4,700	35×40	0.15	2.78	ELXG630VSN472MA40S	
	12,000	25.4×50	0.30	2.78	ELXG250VSN123MQ50S	6,800	35×50	0.15	3.55	ELXG630VSN682MA50S	
	12,000	30×35	0.30	2.70	ELXG250VSN123MR35S	680	22×25	0.15	0.97	ELXG800VSN681MP25S	
	12,000	35×30	0.30	2.76	ELXG250VSN123MA30S	820	22×30	0.15	1.12	ELXG800VSN821MP30S	
	15,000	30×40	0.30	3.13	ELXG250VSN153MR40S	1,000	22×35	0.15	1.27	ELXG800VSN102MP35S	
	15,000	35×35	0.30	3.16	ELXG250VSN153MA35S	1,000	25.4×25	0.15	1.23	ELXG800VSN102MQ25S	
	18,000	30×50	0.30	3.64	ELXG250VSN183MR50S	1,200	22×40	0.15	1.42	ELXG800VSN122MP40S	
	18,000	35×40	0.30	3.61	ELXG250VSN183MA40S	1,200	25.4×30	0.15	1.39	ELXG800VSN122MQ30S	
	27,000	35×50	0.30	4.70	ELXG250VSN273MA50S	1,200	30×25	0.15	1.41	ELXG800VSN122MR25S	
35	2,200	22×25	0.25	1.10	ELXG350VSN222MP25S	1,500	25.4×35	0.15	1.62	ELXG800VSN152MQ35S	
	3,300	22×30	0.25	1.42	ELXG350VSN332MP30S	1,800	22×50	0.15	1.84	ELXG800VSN182MP50S	
	3,300	25.4×25	0.25	1.41	ELXG350VSN332MQ25S	1,800	25.4×40	0.15	1.82	ELXG800VSN182MQ40S	
	3,900	22×35	0.25	1.58	ELXG350VSN392MP35S	1,800	30×30	0.15	1.78	ELXG800VSN182MR30S	
	3,900	25.4×30	0.25	1.58	ELXG350VSN392MQ30S	1,800	35×25	0.15	1.82	ELXG800VSN182MA25S	
	4,700	22×40	0.25	1.78	ELXG350VSN472MP40S	2,200	25.4×50	0.15	2.11	ELXG800VSN222MQ50S	
	4,700	30×25	0.25	1.77	ELXG350VSN472MR25S	2,200	30×35	0.15	2.05	ELXG800VSN222MR35S	


◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (Arms/105°C,120Hz)	Part No.
80	2,200	35×30	0.15	2.09	ELXG800VSN222MA30S	100	1,000	25.4×35	0.15	1.41	ELXG101VSN102MQ35S
	2,700	30×40	0.15	2.35	ELXG800VSN272MR40S		1,000	30×30	0.15	1.42	ELXG101VSN102MR30S
	2,700	35×35	0.15	2.37	ELXG800VSN272MA35S		1,000	35×25	0.15	1.45	ELXG101VSN102MA25S
	3,300	30×50	0.15	2.75	ELXG800VSN332MR50S		1,200	22×50	0.15	1.60	ELXG101VSN122MP50S
	3,300	35×40	0.15	2.73	ELXG800VSN332MA40S		1,200	25.4×40	0.15	1.59	ELXG101VSN122MQ40S
	4,700	35×50	0.15	3.46	ELXG800VSN472MA50S		1,200	30×35	0.15	1.61	ELXG101VSN122MR35S
100	390	22×25	0.15	0.78	ELXG101VSN391MP25S		1,500	25.4×50	0.15	1.86	ELXG101VSN152MQ50S
	560	22×30	0.15	0.99	ELXG101VSN561MP30S		1,500	30×40	0.15	1.87	ELXG101VSN152MR40S
	560	25.4×25	0.15	0.98	ELXG101VSN561MQ25S		1,500	35×30	0.15	1.85	ELXG101VSN152MA30S
	680	22×35	0.15	1.12	ELXG101VSN681MP35S		1,800	35×35	0.15	2.07	ELXG101VSN182MA35S
	820	22×40	0.15	1.26	ELXG101VSN821MP40S		2,200	30×50	0.15	2.40	ELXG101VSN222MR50S
	820	25.4×30	0.15	1.23	ELXG101VSN821MQ30S		2,200	35×40	0.15	2.39	ELXG101VSN222MA40S
	820	30×25	0.15	1.25	ELXG101VSN821MR25S		2,700	35×50	0.15	2.81	ELXG101VSN272MA50S

◆MAXIMUM IMPEDANCE [mΩ/20°C, 30kHz]

Case size φD×L (mm)	V _{dc}		
	10 to 63	80	100
22×25	120	150	
22×30	100	120	
22×35	80	95	
22×40	70	80	
22×50	50	60	
25.4×25	90	110	
25.4×30	70	85	
25.4×35	60	70	
25.4×40	50	60	
25.4×50	40	45	
30×25	70	80	
30×30	50	60	
30×35	40	50	
30×40	35	40	
30×50	25	30	
35×25	65	70	
35×30	45	50	
35×35	38	40	
35×40	30	30	
35×50	23	25	


●105°C Endurance with Rated Ripple Current

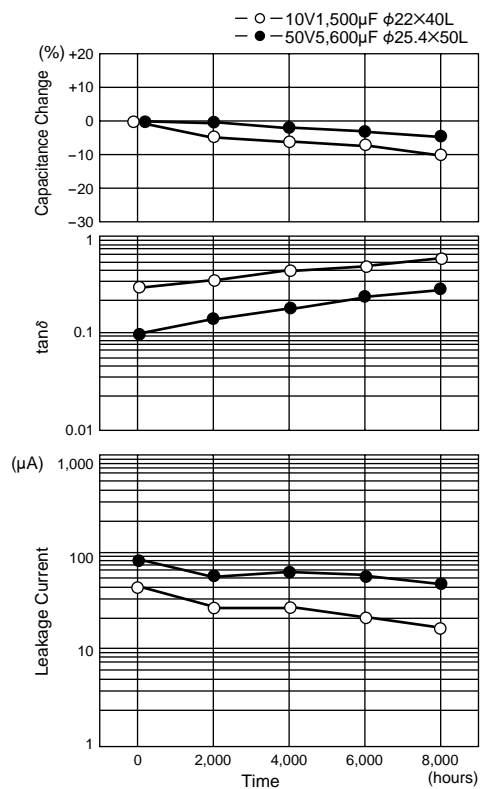



CHA Series

- No sparks against DC over-voltage
- Downsized from current KLG series
- Endurance with ripple current : 2,000hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics		
Category	-25 to +105°C		
Temperature Range	-25 to +105°C		
Rated Voltage Range	200 & 400V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	$I \leq 3\sqrt{CV}$ (at 20°C after 5 minutes) Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V _{dc})		
Dissipation Factor (tanδ)	200V _{dc} : 0.15 max. (0.20 max. for φD=35mm) (at 20°C, 120Hz) 400V _{dc} : 0.15 max.		
Low Temperature Characteristics (Max.Impedance Ratio)	Rated Voltage (V _{dc})	200V	400V
	Z(-25°C) / Z(+20°C)	4	4
ESL	50nH max. (at 20°C, 1MHz)		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	


◆ DIMENSIONS [mm]

- Terminal Code : VS (φ22 to φ35)

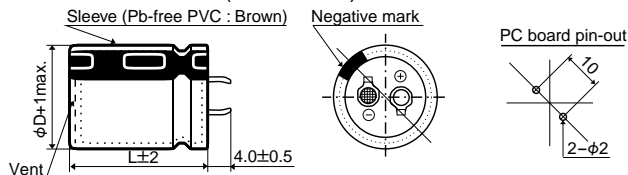

No plastic disk is the standard design

◆ PART NUMBERING SYSTEM

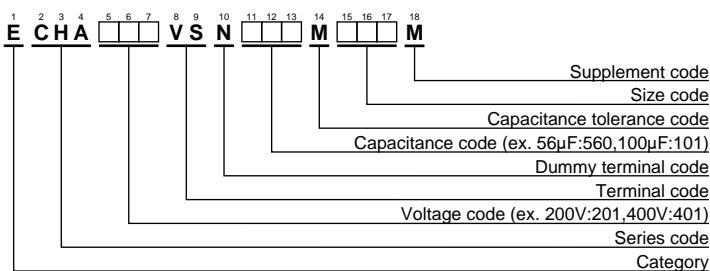

Please refer to "A guide to global code (snap-in type)"

◆ RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
200 & 400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C,120Hz)	Part No.
200	180	22×20	0.15	0.82	ECHA201VSN181MP20M
	220	22×20	0.15	0.90	ECHA201VSN221MP20M
	270	22×25	0.15	1.02	ECHA201VSN271MP25M
	330	22×30	0.15	1.20	ECHA201VSN331MP30M
	330	25.4×25	0.15	1.20	ECHA201VSN331MQ25M
	390	22×30	0.15	1.35	ECHA201VSN391MP30M
	390	25.4×25	0.15	1.35	ECHA201VSN391MQ25M
	470	22×35	0.15	1.45	ECHA201VSN471MP35M
	470	25.4×30	0.15	1.45	ECHA201VSN471MQ30M
	470	30×25	0.15	1.47	ECHA201VSN471MR25M
	560	22×40	0.15	1.62	ECHA201VSN561MP40M
	560	25.4×30	0.15	1.60	ECHA201VSN561MQ30M
	560	30×25	0.15	1.60	ECHA201VSN561MR25M
	680	25.4×35	0.15	1.82	ECHA201VSN681MQ35M
	680	30×30	0.15	1.81	ECHA201VSN681MR30M
	680	35×25	0.20	1.86	ECHA201VSN681MA25M
	820	25.4×45	0.15	2.11	ECHA201VSN821MQ45M
	820	30×35	0.15	2.11	ECHA201VSN821MR35M
	820	35×25	0.20	2.11	ECHA201VSN821MA25M
	1,000	30×35	0.15	2.40	ECHA201VSN102MR35M
1,000	35×30	0.20	2.40	ECHA201VSN102MA30M	
1,200	30×45	0.15	2.69	ECHA201VSN122MR45M	
1,200	35×35	0.20	2.65	ECHA201VSN122MA35M	

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (A _{rms} /105°C,120Hz)	Part No.
400	56	22×20	0.15	0.45	ECHA401VSN560MP20M
	68	22×20	0.15	0.51	ECHA401VSN680MP20M
	82	22×25	0.15	0.58	ECHA401VSN820MP25M
	100	22×25	0.15	0.66	ECHA401VSN101MP25M
	100	25.4×25	0.15	0.66	ECHA401VSN101MQ25M
	120	22×30	0.15	0.76	ECHA401VSN121MP30M
	120	25.4×25	0.15	0.76	ECHA401VSN121MQ25M
	150	22×35	0.15	0.85	ECHA401VSN151MP35M
	150	25.4×30	0.15	0.85	ECHA401VSN151MQ30M
	150	30×25	0.15	0.85	ECHA401VSN151MR25M
	180	22×40	0.15	0.94	ECHA401VSN181MP40M
	180	25.4×35	0.15	0.95	ECHA401VSN181MQ35M
	180	30×25	0.15	0.95	ECHA401VSN181MR25M
	220	25.4×35	0.15	1.24	ECHA401VSN221MQ35M
	220	30×30	0.15	1.24	ECHA401VSN221MR30M
	270	25.4×45	0.15	1.30	ECHA401VSN271MQ45M
	270	30×35	0.15	1.30	ECHA401VSN271MR35M
	270	35×25	0.15	1.30	ECHA401VSN271MA25M
	330	30×40	0.15	1.47	ECHA401VSN331MR40M
	330	35×30	0.15	1.47	ECHA401VSN331MA30M


◆DC OVERVOLTAGE TEST CONDITIONS

The vent will operate and the capacitor shall become an open circuit without burning materials when the following excess DC voltage is applied.

●Test DC voltage


Rated Voltage	Nominal Capacitance	Current Limit	Test Voltage
200V _{dc}	<330μF	4A	300/375V _{dc}
	330≤C<470μF	5A	
	≥470μF	7A	
400V _{dc}	<100μF	2A	500/600V _{dc}
	100≤C<220μF	4A	
	≥220μF	7A	

●Test Circuit

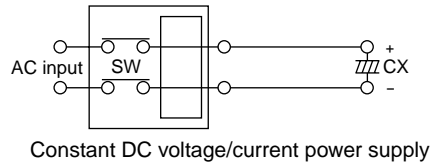

LXH Series

- No sparks against DC over-voltage
- Same case sizes of KMH
- Endurance with ripple current : 5,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics						
Category							
Temperature Range	-25 to +105°C						
Rated Voltage	200 & 400V _{dc}						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)						
Dissipation Factor (tanδ)	0.15 max. (at 20°C, 120Hz)						
Low Temperature Characteristics	Z(-25°C) / Z(+20°C) ≤ 4 (at 120Hz)						
ESL	50nH max. (at 20°C, 1MHz)						
DC Overvoltage Test	When an excessive DC voltage is applied to the capacitors under the test conditions on next page, the vent shall operate and then the capacitors shall become open-circuit without burning materials.						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 or 5,000 hours at 105°C.						
	<table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±20% of the initial value</td> </tr> <tr> <td>D.F. (tanδ)</td> <td>≤ 200% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤ The initial specified value</td> </tr> </table>	Capacitance change	≤ ±20% of the initial value	D.F. (tanδ)	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±20% of the initial value						
D.F. (tanδ)	≤ 200% of the initial specified value						
Leakage current	≤ The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.						
	<table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±15% of the initial value</td> </tr> <tr> <td>D.F. (tanδ)</td> <td>≤ 150% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤ The initial specified value</td> </tr> </table>	Capacitance change	≤ ±15% of the initial value	D.F. (tanδ)	≤ 150% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±15% of the initial value						
D.F. (tanδ)	≤ 150% of the initial specified value						
Leakage current	≤ The initial specified value						

◆ DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35)

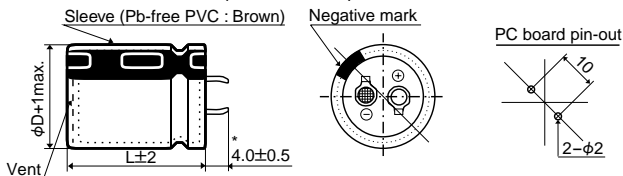

*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

◆ PART NUMBERING SYSTEM

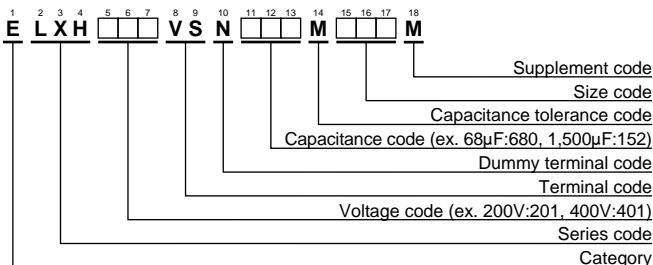

Please refer to "A guide to global code (snap-in type)"

◆ RATED RIPPLE CURRENT MULTIPLIERS


- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
200V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

● 105°C Endurance with Rated Ripple Current

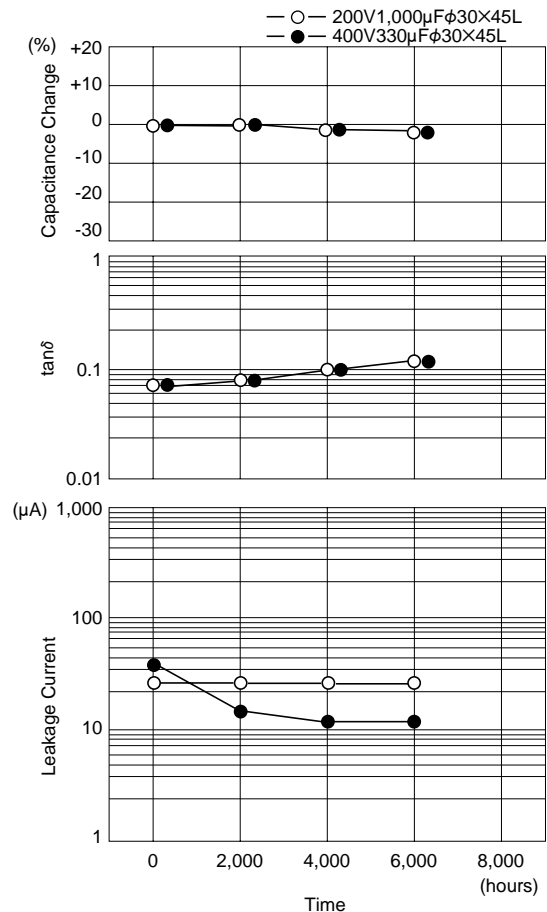

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C, 120Hz)		Part No.
				5,000 hours	3,000 hours	
200	270	22×25	0.15	0.45	0.87	ELXH201VSN271MP25M
	330	22×30	0.15	0.62	1.20	ELXH201VSN331MP30M
	330	25.4×25	0.15	0.62	1.21	ELXH201VSN331MQ25M
	390	22×35	0.15	0.67	1.31	ELXH201VSN391MP35M
	390	25.4×30	0.15	0.66	1.28	ELXH201VSN391MQ30M
	470	22×40	0.15	0.72	1.40	ELXH201VSN471MP40M
	470	25.4×30	0.15	0.72	1.41	ELXH201VSN471MQ30M
	470	30×25	0.15	0.77	1.50	ELXH201VSN471MR25M
	560	22×45	0.15	0.80	1.56	ELXH201VSN561MP45M
	560	25.4×35	0.15	0.78	1.53	ELXH201VSN561MQ35M
	560	30×30	0.15	0.81	1.57	ELXH201VSN561MR30M
	680	22×50	0.15	0.89	1.74	ELXH201VSN681MP50M
	680	25.4×40	0.15	0.89	1.74	ELXH201VSN681MQ40M
	680	30×30	0.15	0.89	1.74	ELXH201VSN681MR30M
	680	35×25	0.15	0.88	1.72	ELXH201VSN681MA25M
	820	25.4×50	0.15	1.05	2.04	ELXH201VSN821MQ50M
	820	30×35	0.15	1.03	2.00	ELXH201VSN821MR35M
	820	35×30	0.15	1.05	2.04	ELXH201VSN821MA30M
	1,000	30×45	0.15	1.18	2.30	ELXH201VSN102MR45M
	1,000	35×35	0.15	1.18	2.30	ELXH201VSN102MA35M
1,200	30×50	0.15	1.33	2.60	ELXH201VSN122MR50M	
1,200	35×40	0.15	1.36	2.65	ELXH201VSN122MA40M	
1,500	35×45	0.15	1.57	3.08	ELXH201VSN152MA45M	
400	68	22×25	0.15	0.26	0.51	ELXH401VSN680MP25M
	68	25.4×20	0.15	0.24	0.46	ELXH401VSN680MQ20M
	82	22×30	0.15	0.30	0.58	ELXH401VSN820MP30M
	82	25.4×25	0.15	0.30	0.58	ELXH401VSN820MQ25M
	100	22×35	0.15	0.34	0.66	ELXH401VSN101MP35M
	100	25.4×30	0.15	0.34	0.66	ELXH401VSN101MQ30M
	120	22×40	0.15	0.37	0.72	ELXH401VSN121MP40M
	120	25.4×30	0.15	0.37	0.72	ELXH401VSN121MQ30M
	120	30×25	0.15	0.39	0.76	ELXH401VSN121MR25M
	150	22×45	0.15	0.42	0.82	ELXH401VSN151MP45M
	150	25.4×35	0.15	0.43	0.84	ELXH401VSN151MQ35M
	150	30×30	0.15	0.43	0.84	ELXH401VSN151MR30M
	180	22×50	0.15	0.49	0.95	ELXH401VSN181MP50M
	180	25.4×40	0.15	0.48	0.94	ELXH401VSN181MQ40M
	180	30×30	0.15	0.47	0.92	ELXH401VSN181MR30M
	180	35×25	0.15	0.48	0.94	ELXH401VSN181MA25M
	220	25.4×45	0.15	0.55	1.07	ELXH401VSN221MQ45M
	220	30×35	0.15	0.54	1.06	ELXH401VSN221MR35M
	220	35×30	0.15	0.55	1.08	ELXH401VSN221MA30M
	270	25.4×50	0.15	0.62	1.21	ELXH401VSN271MQ50M
	270	30×40	0.15	0.62	1.21	ELXH401VSN271MR40M
	270	35×30	0.15	0.59	1.15	ELXH401VSN271MA30M
	330	30×45	0.15	0.71	1.39	ELXH401VSN331MR45M
	330	35×35	0.15	0.69	1.35	ELXH401VSN331MA35M
	390	30×50	0.15	0.80	1.55	ELXH401VSN391MR50M
	390	35×40	0.15	0.79	1.54	ELXH401VSN391MA40M
470	35×45	0.15	0.89	1.74	ELXH401VSN471MA45M	


◆DC OVERVOLTAGE TEST CONDITIONS

The vent will operate and the capacitor shall become an open circuit without burning materials when the following excess DC voltage is applied.

●Test DC voltage

Rated Voltage	Capacitance	Current limit	Test DC voltage
200V _{dc}	<330μF	4A	300/375V _{dc}
	330≤C<470μF	5A	
	≥470μF	7A	
400V _{dc}	<100μF	2A	500/600V _{dc}
	100≤C<220μF	4A	
	≥220μF	7A	

●Test Circuit



Constant DC voltage/current power supply

Appendix (Global code)


◆Capacitance code

* How to use the table

	1st
2nd	Cap. Value

Capacitance value part

2nd	1st								
	1	2	3	4	5	6	7	8	9
0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
A	10.5	20.5	30.5	40.5	50.5	60.5	70.5	80.5	90.5
1	11.0	21.0	31.0	41.0	51.0	61.0	71.0	81.0	91.0
B	11.5	21.5	31.5	41.5	51.5	61.5	71.5	81.5	91.5
2	12.0	22.0	32.0	42.0	52.0	62.0	72.0	82.0	92.0
C	12.5	22.5	32.5	42.5	52.5	62.5	72.5	82.5	92.5
3	13.0	23.0	33.0	43.0	53.0	63.0	73.0	83.0	93.0
D	13.5	23.5	33.5	43.5	53.5	63.5	73.5	83.5	93.5
4	14.0	24.0	34.0	44.0	54.0	64.0	74.0	84.0	94.0
E	14.5	24.5	34.5	44.5	54.5	64.5	74.5	84.5	94.5
5	15.0	25.0	35.0	45.0	55.0	65.0	75.0	85.0	95.0
F	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5
6	16.0	26.0	36.0	46.0	56.0	66.0	76.0	86.0	96.0
G	16.5	26.5	36.5	46.5	56.5	66.5	76.5	86.5	96.5
7	17.0	27.0	37.0	47.0	57.0	67.0	77.0	87.0	97.0
H	17.5	27.5	37.5	47.5	57.5	67.5	77.5	87.5	97.5
8	18.0	28.0	38.0	48.0	58.0	68.0	78.0	88.0	98.0
J	18.5	28.5	38.5	48.5	58.5	68.5	78.5	88.5	98.5
9	19.0	29.0	39.0	49.0	59.0	69.0	79.0	89.0	99.0
K	19.5	29.5	39.5	49.5	59.5	69.5	79.5	89.5	99.5



For less than 10 μ F, a decimal point position is displayed with R.

For 10 μ F or more, capacitance code is set to the first 2 digits and index (1 digit).

Treatment of fraction (Refer to the table)

Example of conversion

Real cap.	The first 2 digits	Treatment of fraction	Code		
			11th	12th	13th
10.0 μ F →	10.0 →	10.0 →	1	0	0
10.1 μ F →	10.1 →	10.0 →	1	0	0
10.2 μ F →	10.2 →	10.0 →	1	0	0
10.3 μ F →	10.3 →	10.5 →	1	A	0
10.4 μ F →	10.4 →	10.5 →	1	A	0
10.5 μ F →	10.5 →	10.5 →	1	A	0
10.6 μ F →	10.6 →	10.5 →	1	A	0
10.7 μ F →	10.7 →	10.5 →	1	A	0
10.8 μ F →	10.8 →	11.0 →	1	1	0
10.9 μ F →	10.9 →	11.0 →	1	1	0
11.0 μ F →	11.0 →	11.0 →	1	1	0
132 μ F →	13.2 →	13.0 →	1	3	1
133 μ F →	13.3 →	13.5 →	1	D	1
167 μ F →	16.7 →	16.5 →	1	G	1
168 μ F →	16.8 →	17.0 →	1	7	1
1110 μ F →	11.1 →	11.0 →	1	1	2
1340 μ F →	13.4 →	13.5 →	1	D	2
13200 μ F →	13.2 →	13.0 →	1	3	3
13600 μ F →	13.6 →	13.5 →	1	D	3
270000 μ F →	27.0 →	27.0 →	2	7	4

◆Case length (Radial lead type)

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
0.0	—	—	1.0	0	1	2.0	0	2	3.0	0	3	4.0	0	4
0.1	0	B	1.1	1	B	2.1	2	B	3.1	3	B	4.1	4	B
0.2	0	C	1.2	1	C	2.2	2	C	3.2	3	C	4.2	4	C
0.3	0	D	1.3	1	D	2.3	2	D	3.3	3	D	4.3	4	D
0.4	0	E	1.4	1	E	2.4	2	E	3.4	3	E	4.4	4	E
0.5	0	F	1.5	1	F	2.5	2	F	3.5	3	F	4.5	4	F
0.6	0	G	1.6	1	G	2.6	2	G	3.6	3	G	4.6	4	G
0.7	0	H	1.7	1	H	2.7	2	H	3.7	3	H	4.7	4	H
0.8	0	J	1.8	1	J	2.8	2	J	3.8	3	J	4.8	4	J
0.9	0	K	1.9	1	K	2.9	2	K	3.9	3	K	4.9	4	K
5.0	0	5	6.0	0	6	7.0	0	7	8.0	0	8	9.0	0	9
5.1	5	B	6.1	6	B	7.1	7	B	8.1	8	B	9.1	9	B
5.2	5	C	6.2	6	C	7.2	7	C	8.2	8	C	9.2	9	C
5.3	5	D	6.3	6	D	7.3	7	D	8.3	8	D	9.3	9	D
5.4	5	E	6.4	6	E	7.4	7	E	8.4	8	E	9.4	9	E
5.5	5	F	6.5	6	F	7.5	7	F	8.5	8	F	9.5	9	F
5.6	5	G	6.6	6	G	7.6	7	G	8.6	8	G	9.6	9	G
5.7	5	H	6.7	6	H	7.7	7	H	8.7	8	H	9.7	9	H
5.8	5	J	6.8	6	J	7.8	7	J	8.8	8	J	9.8	9	J
5.9	5	K	6.9	6	K	7.9	7	K	8.9	8	K	9.9	9	K
10.0	1	0	11.0	1	1	12.0	1	2	13.0	1	3	14.0	1	4
10.1	A	1	11.1	B	1	12.1	C	1	13.1	D	1	14.1	E	1
10.2	A	2	11.2	B	2	12.2	C	2	13.2	D	2	14.2	E	2
10.3	A	3	11.3	B	3	12.3	C	3	13.3	D	3	14.3	E	3
10.4	A	4	11.4	B	4	12.4	C	4	13.4	D	4	14.4	E	4
10.5	A	5	11.5	B	5	12.5	C	5	13.5	D	5	14.5	E	5
10.6	A	6	11.6	B	6	12.6	C	6	13.6	D	6	14.6	E	6
10.7	A	7	11.7	B	7	12.7	C	7	13.7	D	7	14.7	E	7
10.8	A	8	11.8	B	8	12.8	C	8	13.8	D	8	14.8	E	8
10.9	A	9	11.9	B	9	12.9	C	9	13.9	D	9	14.9	E	9



PART NUMBERING SYSTEM

Case length [mm]	16th	17th
15.0	1	5
15.1	F	1
15.2	F	2
15.3	F	3
15.4	F	4
15.5	F	5
15.6	F	6
15.7	F	7
15.8	F	8
15.9	F	9

Case length [mm]	16th	17th
16.0	1	6
16.1	G	1
16.2	G	2
16.3	G	3
16.4	G	4
16.5	G	5
16.6	G	6
16.7	G	7
16.8	G	8
16.9	G	9

Case length [mm]	16th	17th
17.0	1	7
17.1	H	1
17.2	H	2
17.3	H	3
17.4	H	4
17.5	H	5
17.6	H	6
17.7	H	7
17.8	H	8
17.9	H	9

Case length [mm]	16th	17th
18.0	1	8
18.1	J	1
18.2	J	2
18.3	J	3
18.4	J	4
18.5	J	5
18.6	J	6
18.7	J	7
18.8	J	8
18.9	J	9

Case length [mm]	16th	17th
19.0	1	9
19.1	K	1
19.2	K	2
19.3	K	3
19.4	K	4
19.5	K	5
19.6	K	6
19.7	K	7
19.8	K	8
19.9	K	9

Case length [mm]	16th	17th
20.0	2	0
20.5	L	1
21.0	2	1
21.5	L	3
22.0	2	2
22.5	L	5
23.0	2	3
23.5	L	7
24.0	2	4
24.5	L	9
25.0	2	5
25.5	M	1
26.0	2	6
26.5	M	3
27.0	2	7
27.5	M	5
28.0	2	8
28.5	M	7
29.0	2	9
29.5	M	9

Case length [mm]	16th	17th
30.0	3	0
30.5	N	1
31.0	3	1
31.5	N	3
32.0	3	2
32.5	N	5
33.0	3	3
33.5	N	7
34.0	3	4
34.5	N	9
35.0	3	5
35.5	P	1
36.0	3	6
36.5	P	3
37.0	3	7
37.5	P	5
38.0	3	8
38.5	P	7
39.0	3	9
39.5	P	9

Case length [mm]	16th	17th
40.0	4	0
40.5	Q	1
41.0	4	1
41.5	Q	3
42.0	4	2
42.5	Q	5
43.0	4	3
43.5	Q	7
44.0	4	4
44.5	Q	9
45.0	4	5
45.5	R	1
46.0	4	6
46.5	R	3
47.0	4	7
47.5	R	5
48.0	4	8
48.5	R	7
49.0	4	9
49.5	R	9

Case length [mm]	16th	17th
50.0	5	0
50.5	S	1
51.0	5	1
51.5	S	3
52.0	5	2
52.5	S	5
53.0	5	3
53.5	S	7
54.0	5	4
54.5	S	9
55.0	5	5
55.5	T	1
56.0	5	6
56.5	T	3
57.0	5	7
57.5	T	5
58.0	5	8
58.5	T	7
59.0	5	9
59.5	T	9

Case length [mm]	16th	17th
60.0	6	0
60.5	U	1
61.0	6	1
61.5	U	3
62.0	6	2
62.5	U	5
63.0	6	3
63.5	U	7
64.0	6	4
64.5	U	9
65.0	6	5
65.5	V	1
66.0	6	6
66.5	V	3
67.0	6	7
67.5	V	5
68.0	6	8
68.5	V	7
69.0	6	9
69.5	V	9

Case length [mm]	16th	17th
70.0	7	0
70.5	W	1
71.0	7	1
71.5	W	3
72.0	7	2
72.5	W	5
73.0	7	3
73.5	W	7
74.0	7	4
74.5	W	9
75.0	7	5
75.5	X	1
76.0	7	6
76.5	X	3
77.0	7	7
77.5	X	5
78.0	7	8
78.5	X	7
79.0	7	9
79.5	X	9

Case length [mm]	16th	17th
80.0	8	0
80.5	Y	1
81.0	8	1
81.5	Y	3
82.0	8	2
82.5	Y	5
83.0	8	3
83.5	Y	7
84.0	8	4
84.5	Y	9
85.0	8	5
85.5	Z	1
86.0	8	6
86.5	Z	3
87.0	8	7
87.5	Z	5
88.0	8	8
88.5	Z	7
89.0	8	9
89.5	Z	9

◆Case length (Snap-in type / Screw mount terminal type)

Case length [mm]	16th	17th
20	2	0
21	2	1
22	2	2
23	2	3
24	2	4
25	2	5
26	2	6
27	2	7
28	2	8
29	2	9

Case length [mm]	16th	17th
30	3	0
31	3	1
32	3	2
33	3	3
34	3	4
35	3	5
36	3	6
37	3	7
38	3	8
39	3	9

Case length [mm]	16th	17th
40	4	0
41	4	1
42	4	2
43	4	3
44	4	4
45	4	5
46	4	6
47	4	7
48	4	8
49	4	9

Case length [mm]	16th	17th
50	5	0
51	5	1
52	5	2
53	5	3
54	5	4
55	5	5
56	5	6
57	5	7
58	5	8
59	5	9

Case length [mm]	16th	17th
60	6	0
61	6	1
62	6	2
63	6	3
64	6	4
65	6	5
66	6	6
67	6	7
68	6	8
69	6	9

Case length [mm]	16th	17th
70	7	0
71	7	1
72	7	2
73	7	3
74	7	4
75	7	5
76	7	6
77	7	7
78	7	8
79	7	9

Case length [mm]	16th	17th
80	8	0
81	8	1
82	8	2
83	8	3
84	8	4
85	8	5
86	8	6
87	8	7
88	8	8
89	8	9

Case length [mm]	16th	17th
90	9	0
91	9	1
92	9	2
93	9	3
94	9	4
95	9	5
96	9	6
97	9	7
98	9	8
99	9	9

Case length [mm]	16th	17th
100	A	0
101	A	1
102	A	2
103	A	3
104	A	4
105	A	5
106	A	6
107	A	7
108	A	8
109	A	9

Case length [mm]	16th	17th
110	B	0
111	B	1
112	B	2
113	B	3
114	B	4
115	B	5
116	B	6
117	B	7
118	B	8
119	B	9

Case length [mm]	16th	17th
120	C	0
121	C	1
122	C	2
123	C	3
124	C	4
125	C	5
126	C	6
127	C	7
128	C	8
129	C	9

Case length [mm]	16th	17th
130	D	0
131	D	1
132	D	2
133	D	3
134	D	4
135	D	5
136	D	6
137	D	7
138	D	8
139	D	9

Case length [mm]	16th	17th
140	E	0
141	E	1
142	E	2
143	E	3
144	E	4
145	E	5
146	E	6
147	E	7
148	E	8
149	E	9

Case length [mm]	16th	17th
150	F	0
151	F	1
152	F	2
153	F	3
154	F	4
155	F	5
156	F	6
157	F	7
158	F	8
159	F	9

Case length [mm]	16th	17th
160	G	0
161	G	1
162	G	2
163	G	3
164	G	4
165	G	5
166	G	6
167	G	7
168	G	8
169	G	9

Case length [mm]	16th	17th
170	H	0
171	H	1
172	H	2
173	H	3
174	H	4
175	H	5
176	H	6
177	H	7
178	H	8
179	H	9

Case length [mm]	16th	17th
180	J	0
181	J	1
182	J	2
183	J	3
184	J	4
185	J	5
186	J	6
187	J	7
188	J	8
189	J	9

Case length [mm]	16th	17th
190	K	0
191	K	1
192	K	2
193	K	3
194	K	4
195	K	5
196	K	6
197	K	7
198	K	8
199	K	9

Case length [mm]	16th	17th
200	L	0
201	L	1
202	L	2
203	L	3
204	L	4
205	L	5
206	L	6
207	L	7
208	L	8
209	L	9

Case length [mm]	16th	17th
210	M	0
211	M	1
212	M	2
213	M	3
214	M	4
215	M	5
216	M	6
217	M	7
218	M	8
219	M	9

Case length [mm]	16th	17th
220	N	0
221	N	1
222	N	2
223	N	3
224	N	4
225	N	5
226	N	6
227	N	7
228	N	8
229	N	9

Case length [mm]	16th	17th
230	P	0
231	P	1
232	P	2
233	P	3
234	P	4
235	P	5
236	P	6
237	P	7
238	P	8
239	P	9

Case length [mm]	16th	17th
240	Q	0
241	Q	1
242	Q	2
243	Q	3
244	Q	4
245	Q	5
246	Q	6
247	Q	7
248	Q	8
249	Q	9

Case length [mm]	16th	17th
250	R	0
251	R	1
252	R	2
253	R	3
254	R	4
255	R	5
256	R	6
257	R	7
258	R	8
259	R	9

◆ Supplement code

Surface mount type / Conductive polymer (Include Radial lead type)

	Terminal plating material (Radial lead type)		
	Sn100%	Sn-Bi	Sn-Pb
Coating case	S	G	N

Radial lead type / Snap-in type

		Terminal plating material (Radial lead type)		
		Sn100%	Sn-Bi	Sn-Pb
Outer sleeve	PET	S	D	C
	Coating case	H	G	F
	Polyolefin	L	—	—
	Pb-free PVC	M	—	N
	PVC	B	A	N

* Pb-free snap-in type does not have top disk.

We also produce Pb-free snap-in type with "Top disk, Pb-free PVC sleeve and Sn100% terminal plating".

In this case, supplement code (the 18th digit) becomes "T".

Screw mount terminal type

	Screw terminal
Pb-free PVC	M
Polyolefin	S
PET	C
PVC	N