

Metallized Polypropylene Film Capacitors

Type: **ECWF(L)**

Designed for high frequency and current applications.



■ Features

- Small size
- Excellent frequency characteristics
- Low loss
- Flame retardant epoxy resin coating

■ Recommended Applications

- Lighting
- High frequency and high current circuits
(TVs, Monitors, Power Supplies, etc.)

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	C	W	F						L	
Products code	Dielectric & construction		Rated voltage	Capacitance			Cap. Tol.	Suffix	Suffix	
			4 2W 6	400VDC 450VDC 630VDC			H ±3% J ±5%		Blank B	Type1 Type2
										Straight Crimped lead


● Explanation of Part Numbers for Odd Size Taping

E	C	W	F					R		L
Products code	Dielectric & construction		Rated voltage	Capacitance			Suffix	Cap. Tol.	Suffix	

■ Specifications

Category temp. range (Including temperature-rise on unit surface)	-40 to +105°C	
Rated voltage	400VDC, 450VDC, 630VDC	
Capacitance range	400VDC	0.022uF to 2.4uF
	450VDC	0.022uF to 1.0uF
	630VDC	0.01uF to 1.3uF
Capacitance tolerance	±3%(H), ±5%(J)	
Withstand voltage	Between terminals : Rated voltage(VDC)×150% 60s	
Dissipation factor	≤0.05% (20°C, 1kHz)	
	≤0.20% (20°C, 10kHz)	
Insulation resistance	C≤0.33uF : 9000MΩmin. (20°C, 100VDC, 60s for 400VDC, 450VDC)	
	C≤0.33uF : 3000MΩmin. (20°C, 500VDC, 60s for 630VDC)	

■ Dimensions in mm (not to scale)

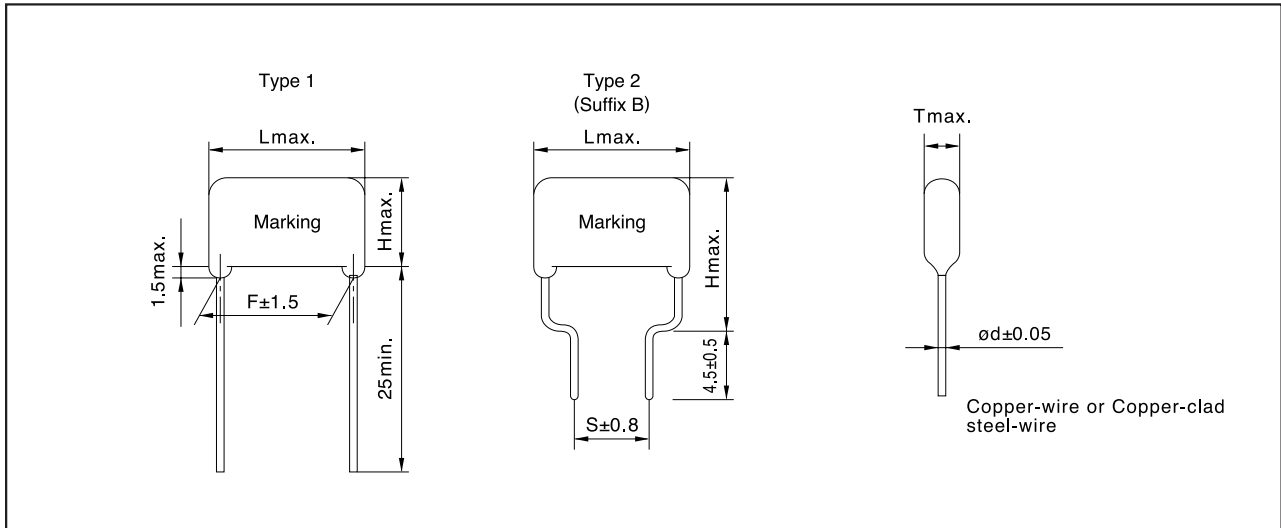


■ Packaging Specification for Bulk Package

Packing quantity: 100pcs./bag

■ Taping Specifications for Automatic Insertion

● Taping style

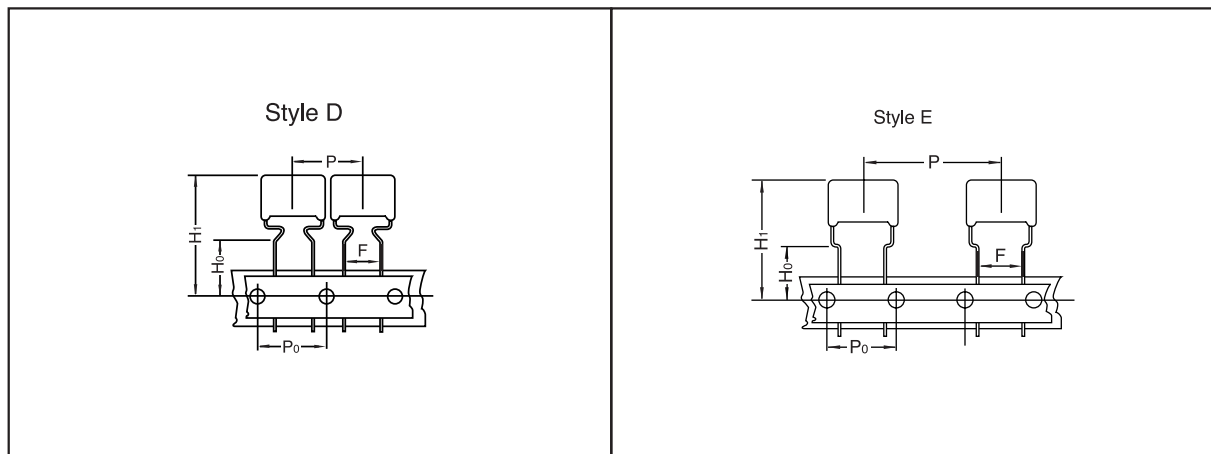

※ Refer to the taping specification.

● Packaging Specifications

Type	Rated voltage	Cap. Range (uF)	Taping Style					Packing
			AD	AS	B	C	D	
ECWF(L)	400VDC	0.022 to 0.091					O	Ammo
	450VDC	0.1 to 1.0					O	
	630VDC	0.01 to 0.043					O	
		0.047 to 0.43					O	

● Lead Spacing

Style	Lead Spacing
D	7.5mm
E	7.5mm

■ Rating, Dimensions & Quantity/Ammo Box

● Type ECWF(L) Rated voltage : 400VDC

Part No.	Cap. (μ F)	Dimensions (mm)							Quantity
		L _{max}	T _{max}	H _{max}		F	S	ϕ d	Ammo 7.5mm
				Type-1	Type-2	Type-1	Type-2		
ECWF4223□L()	0.022	12.5	5.8	8.6	13.6	10.0	7.5	0.6	1100
ECWF4243□L()	0.024	12.5	6.0	8.8	13.8	10.0	7.5	0.6	
ECWF4273□L()	0.027	12.5	6.2	9.0	14.0	10.0	7.5	0.6	
ECWF4303□L()	0.03	12.5	6.4	9.3	14.3	10.0	7.5	0.6	1000
ECWF4333□L()	0.033	12.5	6.7	9.5	14.5	10.0	7.5	0.6	
ECWF4363□L()	0.036	12.5	5.7	8.4	13.4	10.0	7.5	0.6	1100
ECWF4393□L()	0.039	12.5	5.8	8.6	13.6	10.0	7.5	0.6	
ECWF4433□L()	0.043	12.5	6.0	8.8	13.8	10.0	7.5	0.6	
ECWF4473□L()	0.047	12.5	6.2	9.0	14.0	10.0	7.5	0.6	1000
ECWF4513□L()	0.051	12.5	6.4	9.2	14.2	10.0	7.5	0.6	
ECWF4563□L()	0.056	12.5	6.6	9.4	14.4	10.0	7.5	0.6	
ECWF4623□L()	0.062	13.0	6.8	9.6	14.6	10.0	7.5	0.8	900
ECWF4683□L()	0.068	13.0	7.0	9.9	14.9	10.0	7.5	0.8	
ECWF4753□L()	0.075	13.0	7.3	10.1	15.1	10.0	7.5	0.8	
ECWF4823□L()	0.082	13.0	7.5	10.4	15.4	10.0	7.5	0.8	800
ECWF4913□L()	0.091	13.0	7.8	10.7	15.7	10.0	7.5	0.8	
ECWF4104□L()	0.1	15.5	6.5	11.0	16.0	12.5	7.5	0.8	
ECWF4114□L()	0.11	15.5	6.8	11.3	16.3	12.5	7.5	0.8	
ECWF4124□L()	0.12	15.5	7.0	11.5	16.5	12.5	7.5	0.8	400
ECWF4134□L()	0.13	15.5	7.2	11.8	16.8	12.5	7.5	0.8	
ECWF4154□L()	0.15	15.5	7.6	12.2	17.2	12.5	7.5	0.8	
ECWF4164□L()	0.16	15.5	7.8	12.4	17.4	12.5	7.5	0.8	
ECWF4184□L()	0.18	15.5	8.2	12.8	17.8	12.5	7.5	0.8	
ECWF4204□L()	0.2	15.5	8.6	13.3	18.3	12.5	7.5	0.8	
ECWF4224□L()	0.22	15.5	9.0	13.6	18.6	12.5	7.5	0.8	
ECWF4244□L()	0.24	18.0	8.3	13.0	18.0	15.0	10.0	0.8	300
ECWF4274□L()	0.27	18.0	8.8	13.4	18.4	15.0	10.0	0.8	
ECWF4304□L()	0.3	18.0	9.2	13.9	18.9	15.0	10.0	0.8	
ECWF4334□L()	0.33	18.0	9.6	14.3	19.3	15.0	10.0	0.8	
ECWF4364□L()	0.36	18.0	9.9	14.7	19.7	15.0	10.0	0.8	
ECWF4394□L()	0.39	18.0	10.3	15.1	20.1	15.0	10.0	0.8	
ECWF4434□L()	0.43	18.0	10.7	15.6	20.6	15.0	10.0	0.8	
ECWF4474□L()	0.47	18.0	11.2	16.1	21.1	15.0	10.0	0.8	200
ECWF4514□L()	0.51	20.5	10.3	16.8	21.8	17.5	12.5	0.8	300
ECWF4564□L()	0.56	20.5	10.7	17.3	22.3	17.5	12.5	0.8	
ECWF4624□L()	0.62	20.5	11.3	17.9	22.9	17.5	12.5	0.8	200
ECWF4684□L()	0.68	20.5	11.8	18.5	23.5	17.5	12.5	0.8	
ECWF4754□L()	0.75	20.5	12.3	19.1	24.1	17.5	12.5	0.8	
ECWF4824□L()	0.82	23.0	11.8	18.5	23.5	20.0	12.5	0.8	
ECWF4914□L()	0.91	23.0	12.4	19.2	24.2	20.0	12.5	0.8	
ECWF4105□L()	1.0	23.0	13.0	19.8	24.8	20.0	12.5	0.8	—
ECWF4115□L()	1.1	23.0	13.6	20.5	25.5	20.0	12.5	0.8	
ECWF4125□L()	1.2	28.0	12.3	19.1	24.1	25.0	17.5	0.8	
ECWF4135□L()	1.3	28.0	12.8	19.6	24.6	25.0	17.5	0.8	
ECWF4155□L()	1.5	28.0	13.7	20.7	25.7	25.0	17.5	0.8	
ECWF4165□L()	1.6	28.0	14.2	21.2	26.2	25.0	17.5	0.8	
ECWF4185□L()	1.8	28.0	15.2	22.2	27.2	25.0	17.5	0.8	
ECWF4205□L()	2.0	28.0	16.0	23.1	28.1	25.0	17.5	0.8	
ECWF4225□L()	2.2	28.0	16.8	24.0	29.0	25.0	17.5	0.8	
ECWF4245□L()	2.4	28.0	17.5	24.8	29.8	25.0	17.5	0.8	

↑ Suffix for lead crimped or taped type

↑ Capacitance tolerance code

■ Rating, Dimensions & Quantity/Ammo Box

● Type ECWF(L) Rated voltage : 450VDC

Part No.	Cap. (μ F)	Dimensions (mm)							Quantity
		L _{max}	T _{max}	H _{max}		F	S	ϕ d	Ammo 7.5mm
				Type-1	Type-2	Type-1	Type-2		
ECWF2W223□L()	0.022	12.5	5.8	8.6	13.6	10.0	7.5	0.6	1100
ECWF2W243□L()	0.024	12.5	6.0	8.8	13.8	10.0	7.5	0.6	
ECWF2W273□L()	0.027	12.5	6.2	9.0	14.0	10.0	7.5	0.6	1000
ECWF2W303□L()	0.03	12.5	6.4	9.3	14.3	10.0	7.5	0.6	
ECWF2W333□L()	0.033	12.5	6.7	9.5	14.5	10.0	7.5	0.6	900
ECWF2W363□L()	0.036	12.5	5.7	8.4	13.4	10.0	7.5	0.6	
ECWF2W393□L()	0.039	12.5	5.8	8.6	13.6	10.0	7.5	0.6	1100
ECWF2W433□L()	0.043	12.5	6.0	8.8	13.8	10.0	7.5	0.6	
ECWF2W473□L()	0.047	12.5	6.2	9.0	14.0	10.0	7.5	0.6	1000
ECWF2W513□L()	0.051	12.5	6.4	9.2	14.2	10.0	7.5	0.6	
ECWF2W563□L()	0.056	12.5	6.6	9.4	14.4	10.0	7.5	0.6	900
ECWF2W623□L()	0.062	13.0	6.8	9.6	14.6	10.0	7.5	0.8	
ECWF2W683□L()	0.068	13.0	7.0	9.9	14.9	10.0	7.5	0.8	900
ECWF2W753□L()	0.075	13.0	7.3	10.1	15.1	10.0	7.5	0.8	
ECWF2W823□L()	0.082	13.0	7.5	10.4	15.4	10.0	7.5	0.8	800
ECWF2W913□L()	0.091	13.0	7.8	10.7	15.7	10.0	7.5	0.8	
ECWF2W104□L()	0.1	15.5	6.5	11.0	16.0	12.5	7.5	0.8	500
ECWF2W114□L()	0.11	15.5	6.8	11.3	16.3	12.5	7.5	0.8	
ECWF2W124□L()	0.12	15.5	7.0	11.5	16.5	12.5	7.5	0.8	400
ECWF2W134□L()	0.13	15.5	7.2	11.8	16.8	12.5	7.5	0.8	
ECWF2W154□L()	0.15	15.5	7.6	12.2	17.2	12.5	7.5	0.8	
ECWF2W164□L()	0.16	15.5	7.8	12.4	17.4	12.5	7.5	0.8	
ECWF2W184□L()	0.18	15.5	8.2	12.8	17.8	12.5	7.5	0.8	
ECWF2W204□L()	0.2	15.5	8.6	13.3	18.3	12.5	7.5	0.8	
ECWF2W224□L()	0.22	15.5	9.0	13.6	18.6	12.5	7.5	0.8	300
ECWF2W244□L()	0.24	18.0	8.3	13.0	18.0	15.0	10.0	0.8	
ECWF2W274□L()	0.27	18.0	8.8	13.4	18.4	15.0	10.0	0.8	
ECWF2W304□L()	0.3	18.0	9.2	13.9	18.9	15.0	10.0	0.8	
ECWF2W334□L()	0.33	18.0	9.6	14.3	19.3	15.0	10.0	0.8	
ECWF2W364□L()	0.36	18.0	9.9	14.7	19.7	15.0	10.0	0.8	
ECWF2W394□L()	0.39	18.0	10.3	15.1	20.1	15.0	10.0	0.8	200
ECWF2W434□L()	0.43	18.0	10.7	15.6	20.6	15.0	10.0	0.8	
ECWF2W474□L()	0.47	18.0	11.2	16.1	21.1	15.0	10.0	0.8	300
ECWF2W514□L()	0.51	20.5	10.3	16.8	21.8	17.5	12.5	0.8	
ECWF2W564□L()	0.56	20.5	10.7	17.3	22.3	17.5	12.5	0.8	200
ECWF2W624□L()	0.62	20.5	11.3	17.9	22.9	17.5	12.5	0.8	
ECWF2W684□L()	0.68	20.5	11.8	18.5	23.5	17.5	12.5	0.8	200
ECWF2W754□L()	0.75	20.5	12.3	19.1	24.1	17.5	12.5	0.8	
ECWF2W824□L()	0.82	23.0	11.8	18.5	23.5	20.0	12.5	0.8	
ECWF2W914□L()	0.91	23.0	12.4	19.2	24.2	20.0	12.5	0.8	
ECWF2W105□L()	1.0	23.0	13.0	19.8	24.8	20.0	12.5	0.8	

■ Rating, Dimensions & Quantity/Ammo Box

● Type ECWF(L) Rated voltage : 630VDC

Part No.	Cap. (μ F)	Dimensions (mm)							Quantity
		L _{max}	T _{max}	H _{max}		F	S	ϕ d	Ammo 7.5mm
				Type-1	Type-2	Type-1	Type-2		
ECWF6103□L()	0.01	12.5	5.2	8.0	13.0	10.0	7.5	0.6	1200
ECWF6113□L()	0.011	12.5	5.4	8.2	13.2	10.0	7.5	0.6	
ECWF6123□L()	0.012	12.5	5.5	8.3	13.3	10.0	7.5	0.6	
ECWF6133□L()	0.013	12.5	5.6	8.5	13.5	10.0	7.5	0.6	1100
ECWF6153□L()	0.015	12.5	5.9	8.7	13.7	10.0	7.5	0.6	
ECWF6163□L()	0.016	12.5	6.0	8.9	13.9	10.0	7.5	0.6	
ECWF6183□L()	0.018	12.5	6.2	9.1	14.1	10.0	7.5	0.6	1000
ECWF6203□L()	0.02	12.5	6.5	9.3	14.3	10.0	7.5	0.6	
ECWF6223□L()	0.022	12.5	6.2	9.0	14.0	10.0	7.5	0.6	
ECWF6243□L()	0.024	12.5	6.4	9.2	14.2	10.0	7.5	0.6	900
ECWF6273□L()	0.027	13.0	6.6	9.5	14.5	10.0	7.5	0.8	
ECWF6303□L()	0.03	13.0	6.9	9.7	14.7	10.0	7.5	0.8	
ECWF6333□L()	0.033	13.0	7.1	10.0	15.0	10.0	7.5	0.8	800
ECWF6363□L()	0.036	13.0	7.3	10.2	15.2	10.0	7.5	0.8	
ECWF6393□L()	0.039	13.0	7.6	10.4	15.4	10.0	7.5	0.8	
ECWF6433□L()	0.043	13.0	7.9	10.7	15.7	10.0	7.5	0.8	500
ECWF6473□L()	0.047	15.5	6.4	10.8	15.8	12.5	7.5	0.8	
ECWF6513□L()	0.051	15.5	6.6	11.0	16.0	12.5	7.5	0.8	
ECWF6563□L()	0.056	15.5	6.8	11.2	16.2	12.5	7.5	0.8	400
ECWF6623□L()	0.062	15.5	7.1	11.5	16.5	12.5	7.5	0.8	
ECWF6683□L()	0.068	15.5	7.4	11.8	16.8	12.5	7.5	0.8	
ECWF6753□L()	0.075	15.5	7.7	12.1	17.1	12.5	7.5	0.8	300
ECWF6823□L()	0.082	15.5	8.0	12.4	17.4	12.5	7.5	0.8	
ECWF6913□L()	0.091	15.5	8.3	12.7	17.7	12.5	7.5	0.8	
ECWF6104□L()	0.1	18.0	7.7	12.1	17.1	15.0	10.0	0.8	200
ECWF6114□L()	0.11	18.0	8.0	12.4	17.4	15.0	10.0	0.8	
ECWF6124□L()	0.12	18.0	8.3	12.7	17.7	15.0	10.0	0.8	
ECWF6134□L()	0.13	18.0	8.5	13.0	18.0	15.0	10.0	0.8	300
ECWF6154□L()	0.15	18.0	9.1	13.5	18.5	15.0	10.0	0.8	
ECWF6164□L()	0.16	18.0	9.3	13.8	18.8	15.0	10.0	0.8	
ECWF6184□L()	0.18	18.0	9.8	14.2	19.1	15.0	10.0	0.8	200
ECWF6204□L()	0.2	18.0	10.3	14.7	19.7	15.0	10.0	0.8	
ECWF6224□L()	0.22	18.0	10.8	15.5	20.5	15.0	10.0	0.8	
ECWF6244□L()	0.24	18.0	11.2	15.9	20.9	15.0	10.0	0.8	300
ECWF6274□L()	0.27	20.5	10.4	16.7	21.7	17.5	12.5	0.8	
ECWF6304□L()	0.3	20.5	10.9	17.2	22.2	17.5	12.5	0.8	
ECWF6334□L()	0.33	20.5	11.4	17.7	22.7	17.5	12.5	0.8	200
ECWF6364□L()	0.36	20.5	11.9	18.5	23.5	17.5	12.5	0.8	
ECWF6394□L()	0.39	20.5	12.4	19.0	24.0	17.5	12.5	0.8	
ECWF6434□L()	0.43	20.5	13.0	19.5	24.5	17.5	12.5	0.8	—
ECWF6474□L()	0.47	20.5	13.5	20.1	25.1	17.5	12.5	0.8	
ECWF6514□L()	0.51	28.0	11.1	17.3	22.3	25.0	17.5	0.8	
ECWF6564□L()	0.56	28.0	11.6	17.8	22.8	25.0	17.5	0.8	—
ECWF6624□L()	0.62	28.0	12.1	18.7	23.7	25.0	17.5	0.8	
ECWF6684□L()	0.68	28.0	12.7	19.3	24.3	25.0	17.5	0.8	
ECWF6754□L()	0.75	28.0	13.3	19.9	24.9	25.0	17.5	0.8	—
ECWF6824□L()	0.82	28.0	13.9	20.5	25.5	25.0	17.5	0.8	
ECWF6914□L()	0.91	28.0	14.6	21.2	26.2	25.0	17.5	0.8	
ECWF6105□L()	1.0	28.0	15.5	22.3	27.3	25.0	17.5	0.8	—
ECWF6115□L()	1.1	28.0	16.3	23.0	28.0	25.0	17.5	0.8	
ECWF6125□L()	1.2	28.0	17.0	23.7	28.7	25.0	17.5	0.8	
ECWF6135□L()	1.3	28.0	17.6	24.4	29.4	25.0	17.5	0.8	—

Suffix for lead crimped or taped type
 Capacitance tolerance code